Product data sheet
Characteristics

UTZRS101A
METER SOCKET RINGLESS UG 100A

Product availability : Stock - Normally stocked in distribution facility

Price** : 123.00 USD

Main

Product or component type	Meter Socket
Meter socket type	Ringless
Hub type	Solid top

Complementary

Meter socket rated current	125 A
Number of jaws	4 without jaw release
Bypass type	No bypass
Phase	1 phase
[Ue] rated operational voltage	600 V AC
Enclosure material	Steel
Box number	1R
Electrical connection	Lugs 0.5" hex
Service feed location	UG
Wiring configuration	3-wire
Depth	88.90 mm (3.50 in)
Width	203.20 mm (8.00 in)
Height	276.35 mm (10.88 in)

Environment

Product certifications	UL listed
Enclosure Rating	NEMA 3R

Ordering and shipping details

Category	00039 - METER SOCKETS & HUBS
Discount Schedule	DE4

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

GTIN	00785901627807
Returnability	No
Country of origin	US

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic) and Toluene which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Will be compliant – Date to be confirmed

Contractual warranty

Warranty	18 months

UTZRS101A

Approximate Dimensions

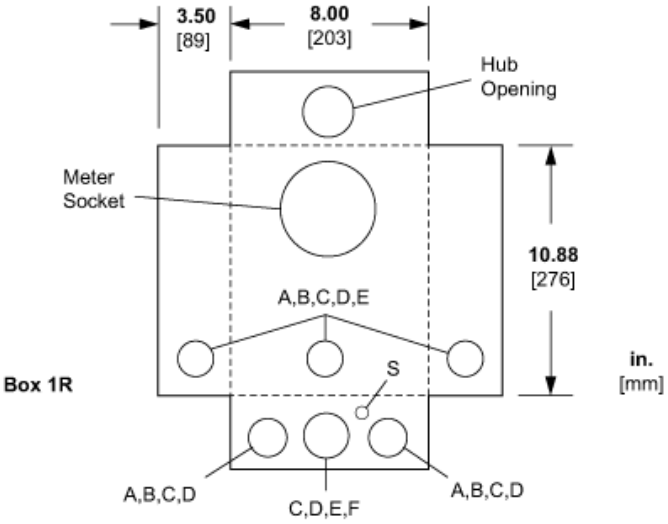

Knockouts

Symbol	A	B	C	D	E	F	S *
Conduit size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	5/16

* Knockout for grounding conductor

Hubs
(Series A - listed by conduit size)

Description	Catalog No.
1.00 in.	A100
1.25 in.	A125
1.50 in.	A150
2.00 in.	A200
2.50 in.	A250

Closing Plates
(to seal hub openings)

Description	Catalog No.
Steel	ACP
Aluminum	ACPA