POWER MATE TECHNOLOGY CO., LTD.

HAE75W SERIES

HALF-BRICK DC-DC CONVERTER

4:1 ULTRA WIDE INPUT RANGE
UP TO 75Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- 3000VAC REINFORCED INSULATION FOR 110VIN
  2250VDC BASIC INSULATION FOR 24VIN AND 48VIN
- UL60950-1, EN60950-1, IEC60950-1, & EN50155 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- RAILWAY SYSTEM
- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

3000VAC ISOLATION	2250VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	OTP

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25℃ otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load µF
HAE75-24S3P3W	9 ~ 36	3.3	20	85	87	60600
HAE75-24S05W	9 ~ 36	5	15	120	88	30000
HAE75-24S12W	9 ~ 36	12	6.3	185	88	5250
HAE75-24S15W	9 ~ 36	15	5	185	88	3330
HAE75-24S24W	9 ~ 36	24	3.2	85	87	1330
HAE75-24S28W	9 ~ 36	28	2.7	85	87	960
HAE75-24S48W	9 ~ 36	48	1.6	85	87	330
HAE75-48S3P3W	18 ~ 75	3.3	20	60	88	60600
HAE75-48S05W	18 ~ 75	5	15	60	90	30000
HAE75-48S12W	18 ~ 75	12	6.3	90	90	5250
HAE75-48S15W	18 ~ 75	15	5	50	89	3330
HAE75-48S24W	18 ~ 75	24	3.2	50	88	1330
HAE75-48S28W	18 ~ 75	28	2.7	50	88	960
HAE75-48S48W	18 ~ 75	48	1.6	50	87	330
HAE75-110S3P3W	43 ~ 160	3.3	20	10	89	60600
HAE75-110S05W	43 ~ 160	5	15	10	91	30000
HAE75-110S12W	43 ~ 160	12	6.3	10	91	5250
HAE75-110S15W	43 ~ 160	15	5	10	91	3330
HAE75-110S24W	43 ~ 160	24	3.2	10	90	1330
HAE75-110S28W	43 ~ 160	28	2.7	10	90	960
HAE75-110S48W	43 ~ 160	48	1.6	10	90	330

PART NUMBER STRUCTURE

HAE75 - 48 S 05 W - P TH HS

Series Name

Input Voltage (VDC)
24:9~36
48:18~75
110:43~160

Output Quantity
S:Single

Output Voltage (VDC)
3P3:3.3
05:5
12:12
15:15
24:24
28:28
48:48

Input Range
4:1

Ctrl and Pin Options
□:Negative logic, 0.200" pin length
L:Negative logic, 0.145" pin length
P:Positive logic, 0.200" pin length
S:Positive logic, 0.145"pin length

Through hole type (1)
□: Thread
TH: No thread

Assembly Option
□: No Heat-sink
Heat-sink type:
HS: Height H=0.45" vertical fin, 7G-0021A-F
HS1: Height H=0.24" horizontal fin, 7G-0022A-F
HS2: Height H=0.24" vertical fin, 7G-0023A-F
HS3: Height H=0.45" horizontal fin, 7G-0024A-F
Terminal block type (2)**:**
T: Wall mounted
TF: Wall mounted with EMC filter(3)
TF1: Wall mounted with EMC filter can be connected to PE ⏚(3)

(1) The module can't equip Heat-sink with TH option.
(2) Terminal block type only for 0.200" pin length.
(3) EMI filter meet EN55011, EN55022 Class A.

INPUT SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range		24Vin(nom)		9	24	36	VDC
		48Vin(nom)		18	48	75	
		110Vin(nom)		43	110	160	
Start up voltage		24Vin(nom)				9	VDC
		48Vin(nom)				18	
		110Vin(nom)				43	
Shutdown voltage		24Vin(nom)			7.5		VDC
		48Vin(nom)			16		
		110Vin(nom)			36		
Start up time	Constant resistive load	Power up	110Vin(nom)		60		ms
			Others		25		
		Remote ON/OFF	110Vin(nom)		60		
			Others		25		
Input surge voltage	1 second, max.	24Vin(nom)				50	VDC
		48Vin(nom)				100	
		110Vin(nom)				185	
Input filter (1)					Pi type		
Remote ON/OFF	Referred to –Vin pin	Negative logic	DC-DC ON		Short or 0 ~ 1.2VDC		
		(Standard)	DC-DC OFF		Open or 3 ~ 12 VDC		
		Positive logic	DC-DC ON		Open or 3 ~ 12 VDC		
		(Option)	DC-DC OFF		Short or 0 ~ 1.2VDC		
		Input current of Ctrl pin		-0.5		1	mA
		Remote off input current			3		mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.1		+0.1	%
Load regulation	No Load to Full Load		-0.1		+0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense		-20		+10	%
Remote sense	% of Vout(nom) If remote sense is not being used, Sense pins should be connected to corresponding polarity OUTPUT pins.				10	%
Ripple and noise	Measured by 20MHz bandwidth					
	With a 4.7μF/50V X7R MLCC	3.3Vout, 5Vout		75	100	mVp-p
	With a 4.7μF/50V X7R MLCC	12Vout, 15Vout		100	125	
	With a 4.7μF/50V X7R MLCC	24Vout, 28Vout		200	250	
	With a 2.2μF/100V X7R MLCC	48Vout		300	350	
Temperature coefficient			-0.02		+0.02	%/℃
Transient response recovery time	25% load step change			200	250	μs
Over voltage protection	% of Vout(nom); Hiccup mode		115		130	%
Over load protection	% of Iout rated; Hiccup mode	110Vin(nom)		150		%
		Others	110		140	
Short circuit protection				Continuous, automatics recovery		

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation)	110Vin(nom)	Input to Output	3000			VAC
			Input (Output) to Case	1500			
	1 minute (Basic insulation)	Others	Input to Output	2250			VDC
			Input (Output) to Case	1600			
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						2500	pF
Switching frequency				270	300	330	kHz
Safety approvals							UL60950-1 EN60950-1 IEC60950-1 EN50155
Case material		24Vin(nom) and 48Vin(nom)					Metal
		110Vin(nom)					Aluminum base-plate with plastic case
Base material		24Vin(nom) and 48Vin(nom)					FR4 PCB
Potting material							Silicone (UL94 V-0)
Weight							97g (3.42oz)
MTBF	MIL-HDBK-217F, Full load						3.362×10^5 hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating case temperature	Base-plate	-40		+105	℃
Over temperature protection			+115		℃
Storage temperature range	Terminal block type Others	-40 -55		+105 +125	℃
Thermal impedance (2)	Vertical direction by natural convection (20LFM) Module without assembly option Heat-sink type with 0.24" Height Heat-sink type with 0.45" Height		6.7 5.4 4.7		℃/W
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions		Level
EMI (3)	EN55011, EN55022		Class A Class B
ESD	EN61000-4-2	Air ±8kV and Contact ±6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	20V/m	Perf. Criteria A
Fast transient (4)	EN61000-4-4	±2kV	Perf. Criteria A
Surge (4)	EN61000-4-5	EN55024 ±2kV and EN50155 ±2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10Vr.m.s	Perf. Criteria A

Note:


1. Input source impedance: The power modules will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor.
   The HAE75-24S□□W recommended 4.7μF/50V X7R MLCC or Nippon Chemi-con KY series, 68μF /100V or better capacitor.
2. (1)Thermal test condition with vertical direction by natural convection (20LFM).
   (2)The heat-sink is optional and P/N: 7G-0021A-F , 7G-0022A-F , 7G-0023A-F , 7G-0024A-F. Please refer to heat-sink selection guide.
3. The standard modules meet EMI Class A or Class B with external components. For further information, please contact with P-DUKE.
4. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
   The HAE75-24S□□W and HAE75-48S□□W recommended 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220μF/100V) to connect in parallel.
   The HAE75-110S□□W recommended 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150μF/200V) to connect in parallel.
5. CASE GROUNDING：Connecting four screw bolts to shield plane will help to reduce the EMI.
6. For further information, please contact with P-DUKE.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

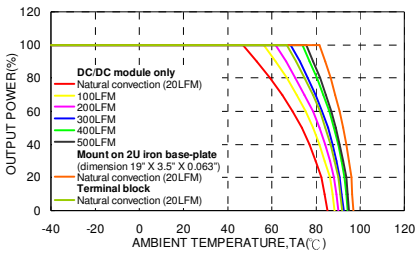


HAE75-48S05W Derating Curve (Note 2)

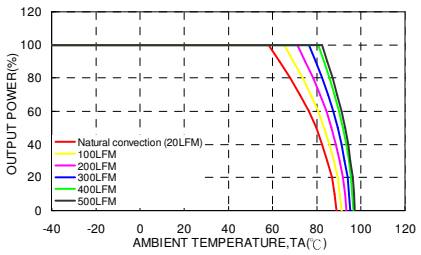


HAE75-48S05W Derating Curve (Note 2)
With 0.24" Height Heat-sink

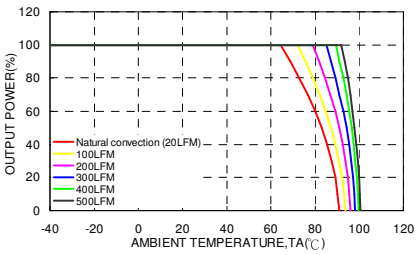

HAE75-48S05W Derating Curve (Note 2)
With 0.45" Height Heat-sink

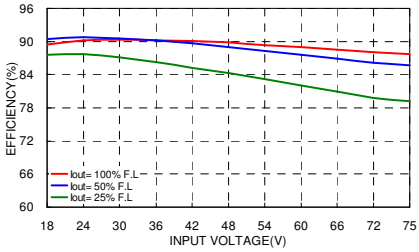


HAE75-48S05W Efficiency vs. Input Voltage

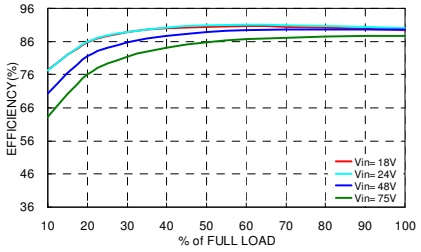

HAE75-48S05W Efficiency vs. Output Load


MECHANICAL DRAWING

HAE75-24S□□W, HAE75-48S□□W

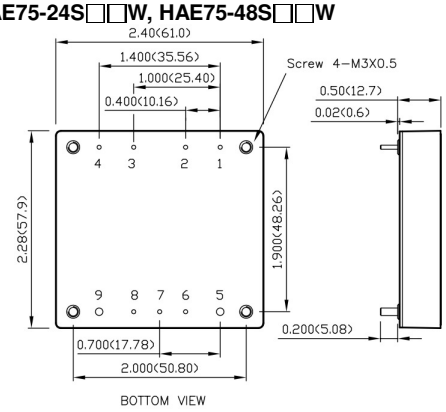

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
   x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)
5. Mounting screws should always be used.
6. The screw locked torque:
   MAX 5.0kgf-cm(0.49N-m)

HAE75-110S□□W

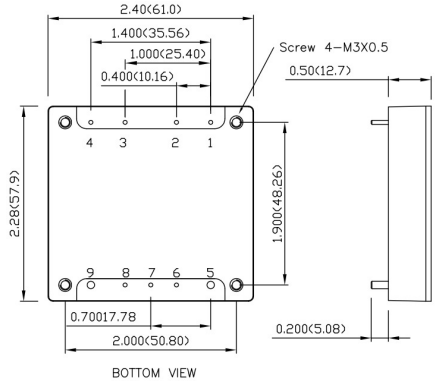


1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
   x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)
5. Mounting screws should always be used.
6. The screw locked torque:
   MAX 3.5kgf-cm(0.34N-m)

PIN CONNECTION

PIN	DEFINE	DIAMETER
1	-Vin	0.04 Inch
2	Case	0.04 Inch
3	Ctrl	0.04 Inch
4	+Vin	0.04 Inch
5	-Vout	0.08 Inch
6	-Sense	0.04 Inch
7	Trim	0.04 Inch
8	+Sense	0.04 Inch
9	+Vout	0.08 Inch

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.




$$R_U = \left(\frac{V_{OUT}\ (100\ + \Delta\%)}{1.225\ \Delta\%} - \frac{(100\ + 2\Delta\%)}{\Delta\%} \right) k\Omega$$


$$R_D = \left(\frac{100}{\Delta\%} - 2 \right) k\Omega$$

HEAT-SINK TYPE OPTIONS

Vertical Fin Orientation, Suffix:-HS, -HS2

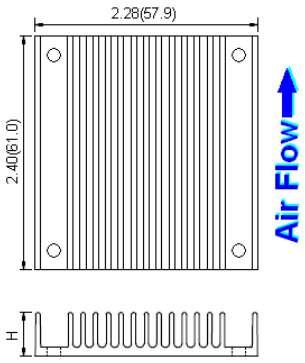

Horizontal Fin Orientation, Suffix:-HS1, -HS3




HS:	Height H=0.45" vertical fin, 7G-0021A-F
HS1:	Height H=0.24" horizontal fin, 7G-0022A-F
HS2:	Height H=0.24" vertical fin, 7G-0023A-F
HS3:	Height H=0.45" horizontal fin, 7G-0024A-F


1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
   x.xxx±0.01 (x.xx±0.25)

TERMINAL BLOCK TYPE OPTION


Wall mounted, Suffix: -T



Wall mounted with EMC Filter, Suffix: -TF



Wall mounted with EMC Filter, Suffix: -TF1
(Can be connected to PE ⏚)



Terminal block type	-T	-TF	-TF1
Weight	200g (7.05oz)	280g (9.88oz)	287g (10.12oz)
Dimensions	3.35 x 2.40 x 1.10 inch (85.0 x 61.0 x 28 0mm)	3.35 x 2.40 x 1.47 inch (85.0 x 61.0 x 37.3 mm)	3.35 x 2.40 x 1.53 inch (85.0 x 61.0 x 38.8 mm)
Through hole (W×L)	2.126 x 3.071 inch (54.00 x 78.00 mm), 4-ϕ 0.17 inch (ϕ 4.3mm)		

For more detail information, please contact with P-DUKE.