

Specific request can be addressed to RAKON info@rakon.fr

Product Description


LNO 320 D1 is a low noise and low G vibration isolated OCVCSCO (Oven Controlled Voltage Controlled SAW Oscillator) at 320 MHz, phase-lockable on an external 10 MHz reference.

LNO 320 D1 provides excellent phase noise performance, and is specially designed for airborne environment. The SAW oscillator is suspended with vibration and shock absorbers included.

LNO 320 D1 is available in a 70mm x 70mm x 34.75mm package.


Three operating modes are available, through Control Input signal:

- Free running Control Input = Not connected
- Voltage controlled Control Input = DC Voltage
- Phase Lock Loop Control Input = 10 MHz Reference

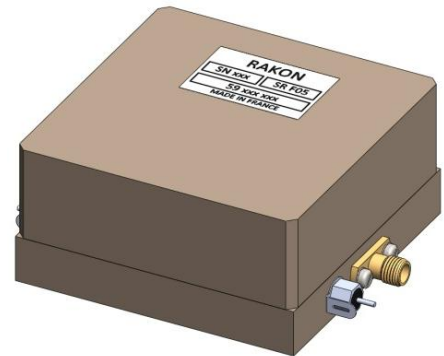

Features

- Excellent phase noise performance (typical value) :
 - -174 dBc/Hz @ 10kHz offset
 - -180 dBc/Hz noise floor

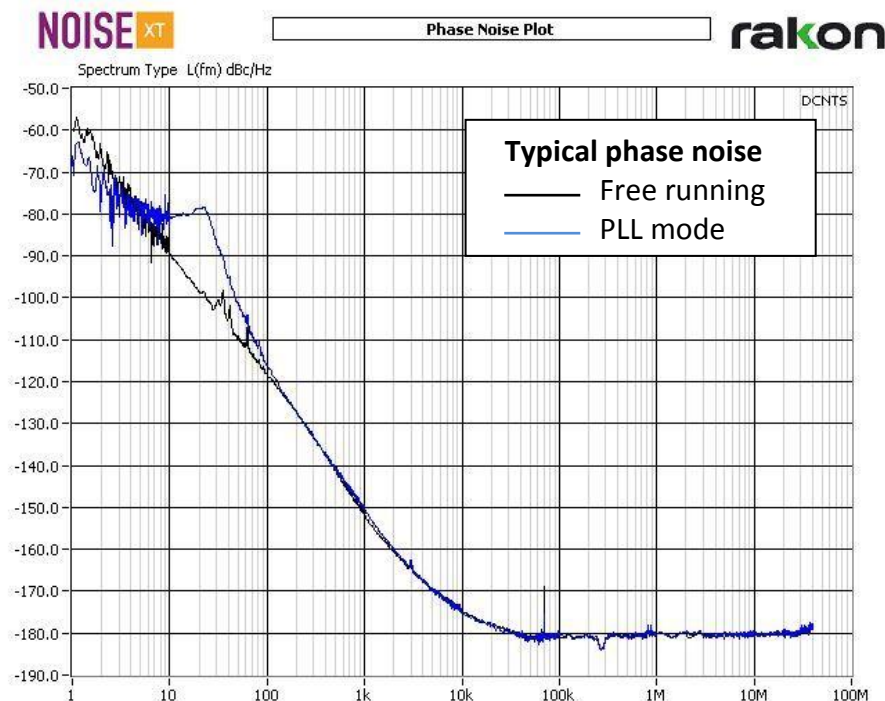

- BIT Status: Ready or Alarm

Applications

- Airborne radars

Specifications

1.0 Environmental conditions

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
1.1	Operating temperature range		-40 to +70		°C
1.2	Storage temperature range		-40 to +85		°C
1.3	Shock	Half sine 30 g 11 ms			
1.4	Random vibration	0.02 g ² /Hz within [10 to 350Hz] 0.005 g ² /Hz within [1 to 2 kHz]			
1.5	G sensitivity	@100Hz vibration frequency, each axis	5.10 ⁻¹⁰	< 2.10 ⁻⁹	/g
1.6	Humidity	93 % RH at 60 °C			
1.7	Low pressure & temperature	120 hPa within [-40 to 55 °C]			
1.8	Constant acceleration	18 g all directions			

2.0 Electrical interface

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
2.1	Supply voltage	Pin 2	+12 ± 0.2		V
2.2	Load impedance	Pin 1, 50Ω all phases	-	< 1.3:1	VSWR
2.3	Control Input	Pin 4	+2 to +10 or 10		V MHz
2.4	BIT status	Pin 3	TTL logic level		

3.0 Performances

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
3.1	Nominal frequency	Definition	320		MHz
	Free running mode	Control Input not connected			
3.2	Frequency calibration	Initial calibration @ 25°C	±0.2	< ±0.5	ppm
3.3	Frequency stability	On full temperature range	-	< ±2	ppm
3.4	Long term stability	After 30 days of continuous operation	-	< ±1	ppm
		1 st year	-	< ±6	ppm
		10 years	-	< ±6	ppm
	Voltage controlled mode	Control Input with DC voltage			
3.5	Tuning voltage	At Control Input	+2 to +10		V
3.6	Frequency tuning	Monotone	±8	> ±6	ppm
3.7	Slope	Positive slope	2	1.5 to 3	ppm/V


	<i>PLL mode</i>	<i>Control Input with 10MHz reference</i>			
3.8	Nominal Control Input frequency	Definition	10		MHz
3.9	Frequency stability	All causes	= Reference stability		
3.10	Input level	50Ω source & load	+10 to +13		dBm
3.11	Input waveform	Square waveform edge	-	> 100	mV/ns
3.12	Loop bandwidth		15	10 to 20	Hz
3.13	Harmonics suppression	10MHz harmonics	-100	< -60	dBc
	<i>All modes</i>	<i>Common specifications</i>			
3.14	Power consumption	Warm-up	11.5	< 12	W
3.15	Power consumption	25 °C (calm air)	3	< 3.6	W
3.16	Warm-up time	±1 ppm with reference to frequency reached after 1 hour of continuous operation at 25 °C	-	< 5	minutes
3.17	Output power	Sine wave into 50 Ω load	-	+12 ±1	dBm

4.0 Single side band phase noise (PN)


Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
	<i>In static environment (free running mode)</i>				
4.1	PN power density @ 1 kHz offset	Static conditions, at 25°C (guaranteed values on full temperature range)	-151	< -145	dBc/Hz
4.2	PN power density @ 10 kHz offset		-174	< -170	dBc/Hz
4.3	PN power density @ 1 MHz offset		-180	< -178	dBc/Hz
4.4	Harmonic distortion	Second and third harmonics	-40	< -30	dBc
4.5	Harmonic distortion	Non-harmonics		< -80	dBc

In dynamic environment (free running mode)

4.6 With the following random vibration spectrum (ref. 1.4):

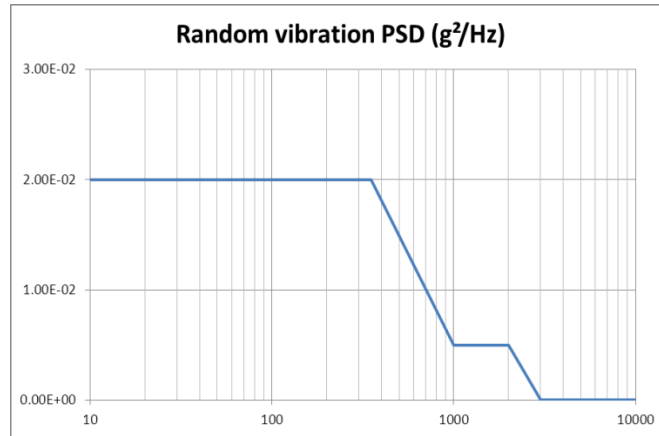

The Single Side Band Phase Noise in dynamic environment is as described below :


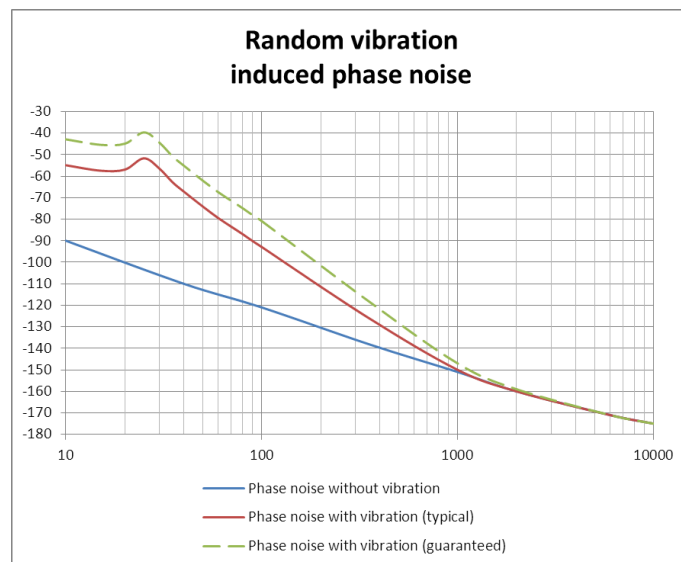


5.0 BIT output

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
5.1	Interface			Open collector	
5.2	Logic 1	TTL level		Oscillator ready	
5.3	Logic 0	TTL level		Alarm	

6.0 Mechanical features

Outline in mm

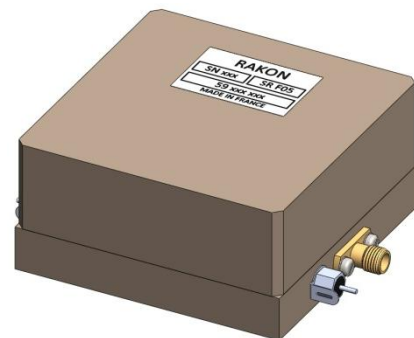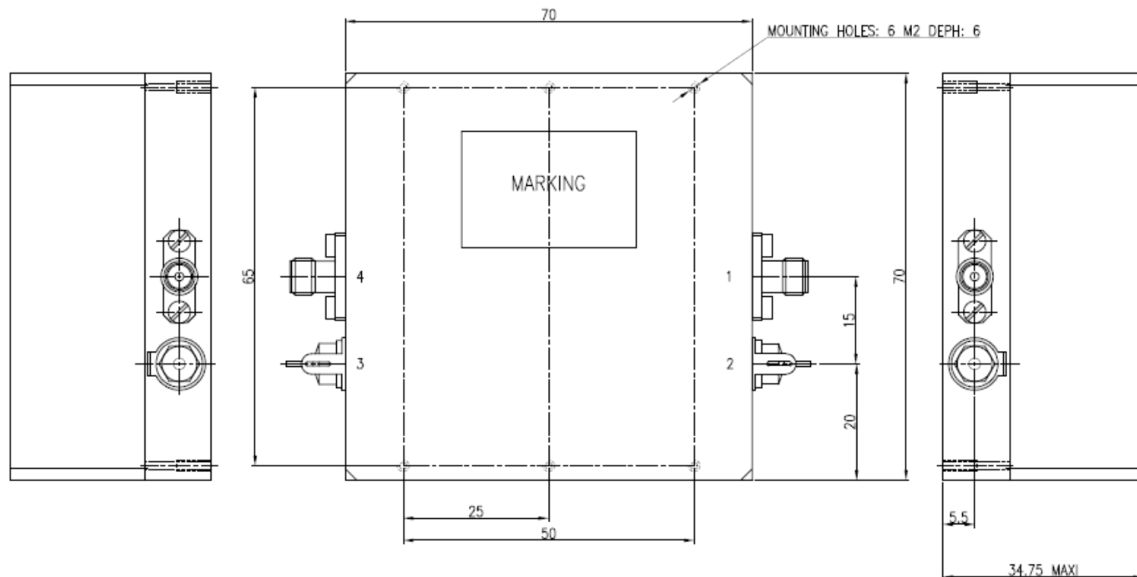

7.0 Pin description

Line	Pin number	Name	Description
7.1	1	Frequency output	Output signal
7.2	2 + lug	Supply voltage	Input supply (2) & ground (lug)
7.3	3 + lug	BIT status	Logic output signal (3) & ground (lug)
7.4	4	Control Input	Tuning DC voltage or 10MHz reference