

- **Designed to Band Pass in 622.08 MHz**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Ultra Miniature Ceramic QCC8C SMD Package**

SF5701

Absolute Maximum Rating (Ta=25°C)		
Parameter	Rating	Unit
Input Power Level P_{in}	10	dBm
DC Voltage VDC Between Any Two Pins V_{DC}	12	V
Operating Temperature Range T_A	-10 ~ +60	°C
Storage Temperature Range T_{stg}	-40 ~ +85	°C


Electronic Characteristics					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Nominal Frequency (at 25°C) (Center frequency between 3dB point)	f_c	NS	622.08	NS	MHz
Insertion Loss at f_c	IL	-	3.0	4.5	dB
Usable Bandwidth	BW	-	±1.0	-	MHz
Amplitude Ripple	$\Delta\alpha$	-	-	2.0	dB
Absolute Attenuation 622.08 ... 602.08 MHz 622.08 ... 627.08 MHz	α_{rel}	45	55	-	dB
		25	30	-	dB
Frequency Aging Absolute Value during the First Year	$ f_A $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins	-	1.0	-	-	MΩ
Input / Output Impedance (nominal)	-	-	150//0	-	Ω/pF

NS = Not Specified

Notes:

- The frequency f_c is defined as the midpoint between the 3dB frequencies.
- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery please contact our sales offices or e-mail sales@vanlong.com.

Package Dimensions (QCC8C)

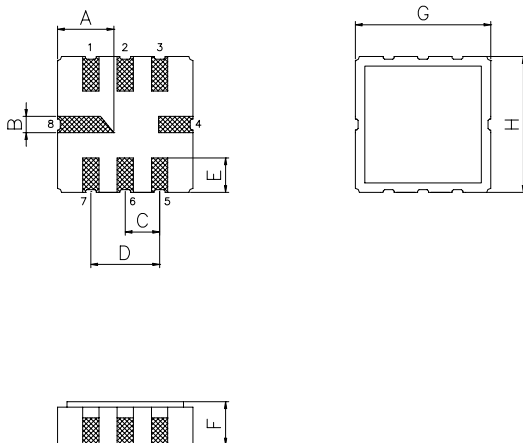


Electrical Connections

Terminals	Connection
1	Input
2	Input Ground
5	Output
6	Output Ground
3,7	To be Grounded
4,8	Case Ground

Package Dimensions


Dimensions	Nom (mm)	Dimensions	Nom (mm)
A	2.08	E	1.20
B	0.60	F	1.35
C	1.27	G	5.00
D	2.54	H	5.00

Marking



1. F5701 - Part Code
2. Frequency (MHz) in 5 digits
3. Date Code:
Y : Last digit of year
WW : Week No.

Test Circuit

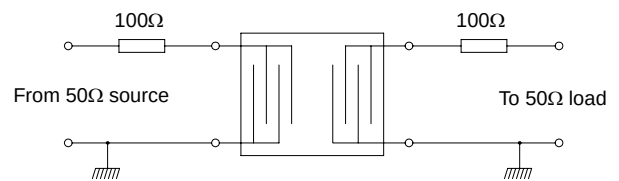

Typical Frequency Response

