


SHEET 1 OF 1




CIRCUIT: DPDT


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-1, 5-4	N/A	2-3, 5-6

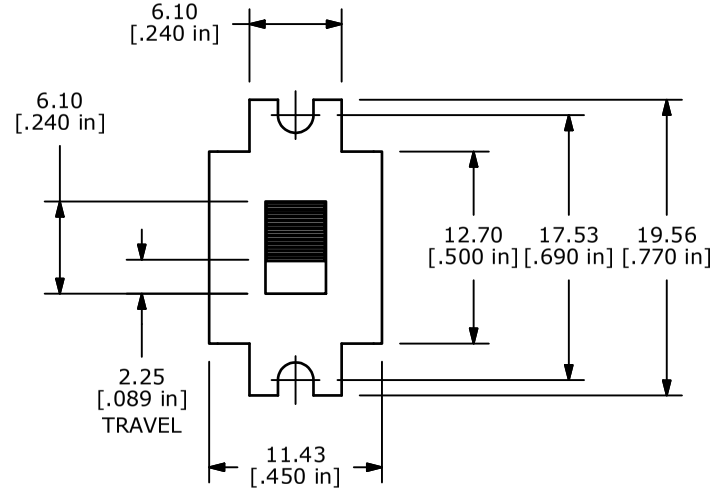



ISOMETRIC

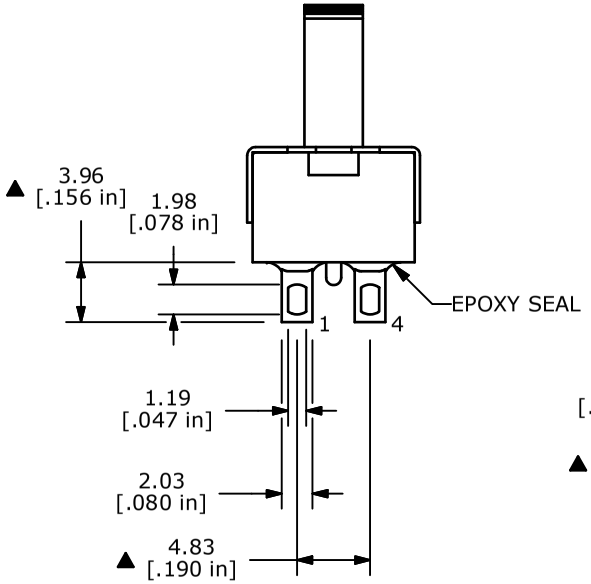

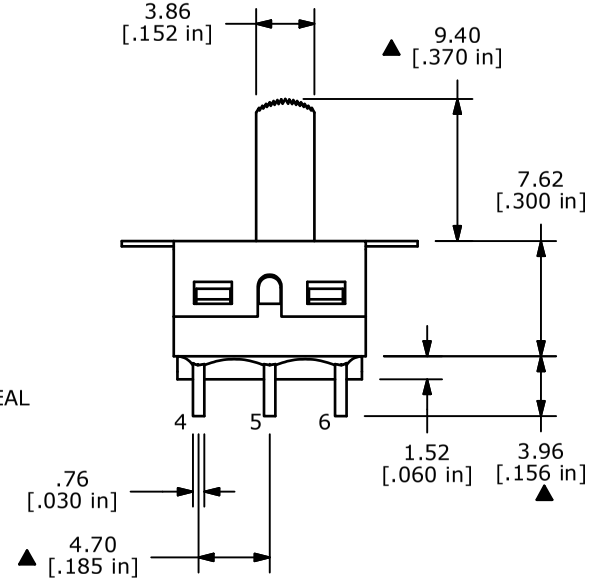

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. CONTACT RATING: 5A @120VAC OR 28VDC
   2A @250VAC
6. ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
7. CONTACT RESISTANCE: 10 m-OHM TYP.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
12. PACKAGE: TRAY/108 PCS PER

REV	PCR NO	DESCRIPTION	DATE	BY
B	19572	DRAWING UPDATE / CLEAN-UP	1/7/11	BGL
A	17217	RELEASED FOR PRODUCTION	4/25/07	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE 500SDP1S3M1QEB

SCALE	DATE	DR	DWG	REV
2:1	4/25/2007	TN	T523005	B