

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0039036010](#)
Status: **Active**
Overview: [standard_093](#)
Description: 2.36mm (.093") Diameter Standard .093" Pin and Socket Plug Housing With Positive Latch, UL 94V-2, Panel Mount, 1 Circuit

Documents:

3D Model	Product Specification PS-3191-005 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-3191-001 (PDF)	

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	3191
Comments	Polarized to Mating Part
Overview	standard_093
Product Name	Standard .093"

Physical

Breakaway	No
Circuits (maximum)	1
Color - Resin	Natural
Flammability	94V-2
Gender	Dual
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface (in)	0.264 In
Pitch - Mating Interface (mm)	6.71 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical


Current - Maximum per Contact	12A
-------------------------------	-----

Material Info

Old Part Number	3191-01P
-----------------	----------

Reference - Drawing Numbers

Packaging Specification	SPK-3191-001
Product Specification	PS-3191-001, PS-3191-005
Sales Drawing	SD-3191-001, SD-3191-006

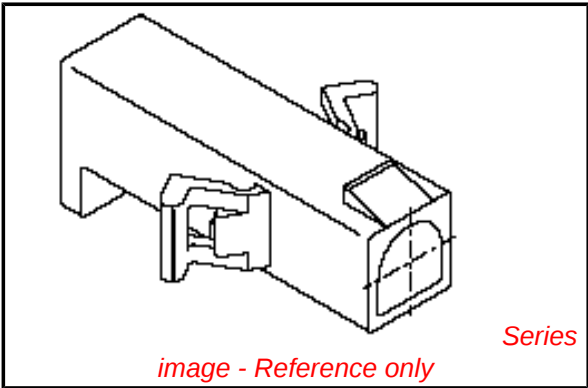

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[3191](#)Series

Mates With

[3191](#) Pin and Socket Recptacle, [5219](#)
Vertical PCB Header

Use With

[1189](#) Crimp Terminals, [1190](#) Crimp
Terminals, [1380](#) Male Crimp Terminals,
[1381](#) Female Crimp Terminals, [1433](#) Crimp
Terminals, [1434](#) Male Crimp Terminals,
[2605](#) , [2606](#) , [1973](#) , [2151](#) , [2273](#) , [2870](#) ,
[2871](#) , [4272](#) , Lin

F

E

D

C

B

A

F



E

D

C




B

A

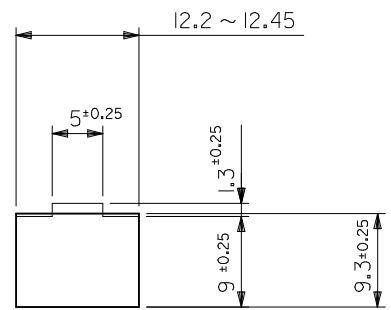

パネル取付穴推奨寸法(厚さ2.0最大)
ハウジングの装着はパネル穴打抜き方向より行うこと
RECOMMENDED PANEL HOLE DIMENSION (THK. 2.0 MAX.)
ATTACH THE HOUSING FROM THE DIRECTION OF
PANEL HOLE PUNCHED OUT

注記
NOTE
() 内寸法は参考値
DIMENSIONS IN () ARE REFERENCE

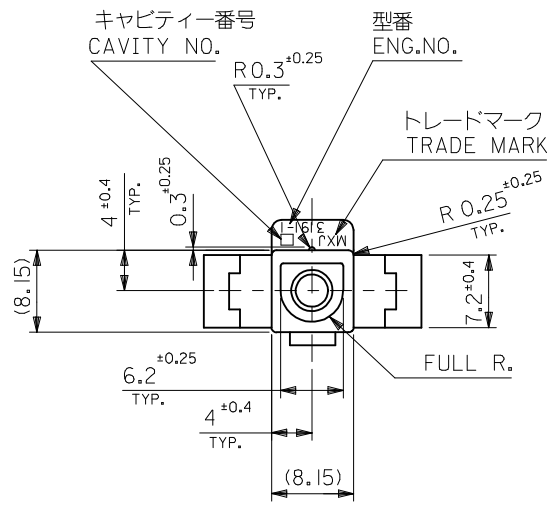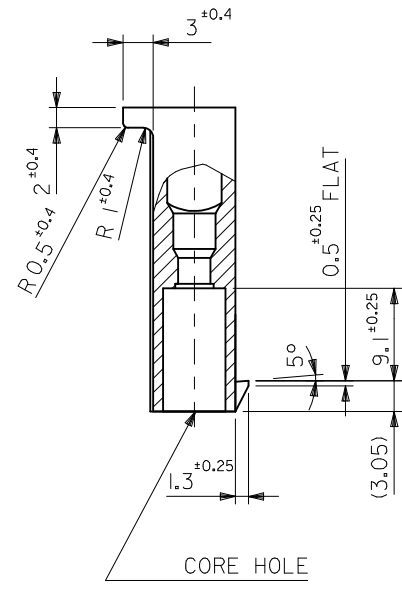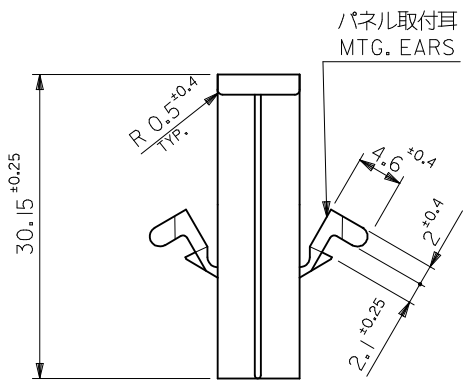

青 BLUE	39-01-8019	3191-01P-BU	NYLON66	94V-2
赤 RED	39-01-9010	3191-01P-RE		
自然色 NATURAL	39-03-6010	3191-01P		
COLOR	EDP. NO.	ENG. NO.	MATERIAL	UL

REVISED EC NO: J2009-2399 DRWN:KTOYODA 2009/05/14 CHKD:HATSUMOTO 2009/05/20 APPR:NUKITA 2009/05/20 B	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		2:1	METRIC		
		10 UNDER	± ---	DRAWN BY M.NABEI	DATE '07/05/10	TITLE 1 CKT. PLUG HS'G (.093 DIA. TERMINAL)			
		10 OVER 30 UNDER	± ---	CHECKED BY Y.MAEDA	DATE '07/05/10				
		30 OVER	± ---	APPROVED BY N.UKITA	DATE '07/05/10	MOLEX INCORPORATED			
		ANGULAR ± --- °		MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-3191-001		1 OF 1	
REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

F

E

D

C

B

A

F



E

D

C



B

A

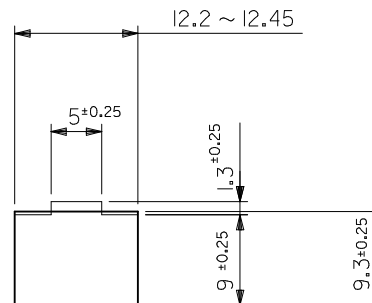

パネル取付穴推奨寸法 (厚さ2.0最大)
ハウジングの装着はパネル穴打抜き方向より行うこと
RECOMMENDED PANEL HOLE DIMENSION (THK. 2.0 MAX.)
ATTACH THE HOUSING FROM THE DIRECTION OF
PANEL HOLE PUNCHED OUT

注記
NOTE
() 内寸法は参考値
DIMENSIONS IN () ARE REFERENCE

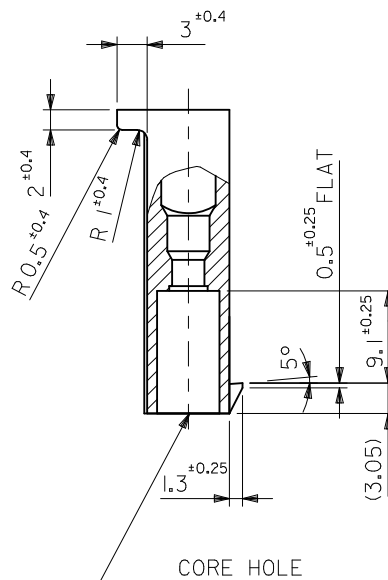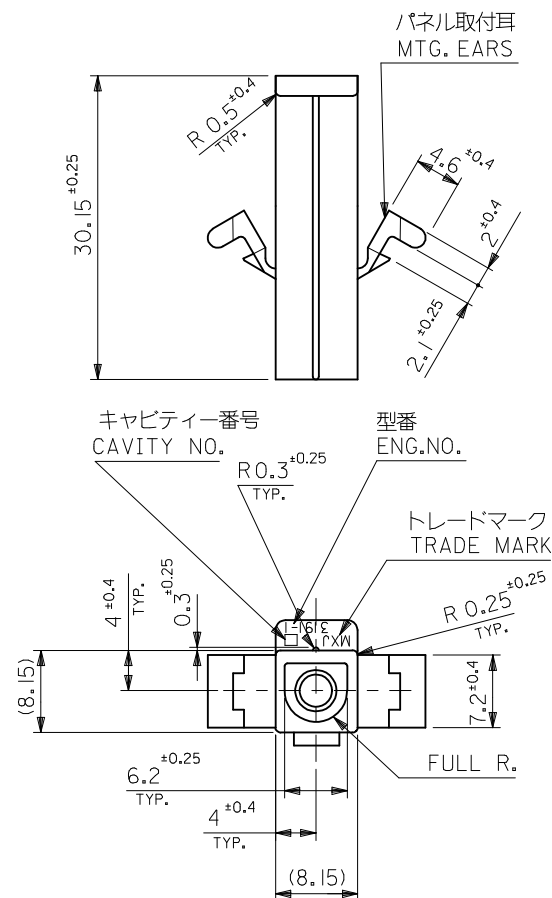

39-03-6011	3191-01P-201	NYLON66	94V-0
39-03-6010	3191-01P	NYLON66	94V-2
EDP. NO.	ENG. NO.	MATERIAL	UL

REVISED EC NO.: J2009-2399 DRWN: KTOYODA 2009/05/14 CHKD: H. MATSUMOTO 2009/05/20 APPR: NUKITA 2009/05/20	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY H. IJIMA	DATE '96/06/21	TITLE 1CKT. PLUG HS'G (.093 DIA. TERMINAL)				
		10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '96/06/21					
		30 OVER	± ---	APPROVED BY M. ENOMOTO	DATE '96/06/21	MOLEX INCORPORATED				
		ANGULAR	± --- °	MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-3191-006			1 OF 1	
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								