
HN27C256FP Series

T-46-13-25

32768-word x 8-bit CMOS One Time Electrically Programmable ROM

The HN27C256FP is a 32768-word by 8-bit one time electrically programmable ROM. Initially, all bits of the HN27C256FP are in the "1" State (Output High). Data is introduced by selectively programming "0" into the desired bit locations. This device is packaged in a 28 pin plastic flat package (SOP). Therefore, this device cannot be re-written.




(FP-28DA)

■ FEATURES


- Low Power Dissipation ..... 40mW/MHz max. (Active Mode)
  110μW max (Standby Mode)
- Access Time ..... 250ns max. (HN27C256FP-25T)
  300ns max. (HN27C256FP-30T)
- Single Power Supply ..... 5V ± 5%
- High Performance Programming .. Program Voltage: +12.5V DC
- Static ..... No Clocks Required
- Inputs and Outputs TTL Compatible During Both Read and Program Modes
- Absolute Max. Rating of V_{PP} pin. . . 14.0V
- Device Identifier Mode..... Manufacturer Code and Device Code

■ PIN ARRANGEMENT

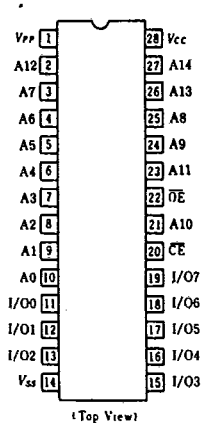

(Top View)

■ BLOCK DIAGRAM

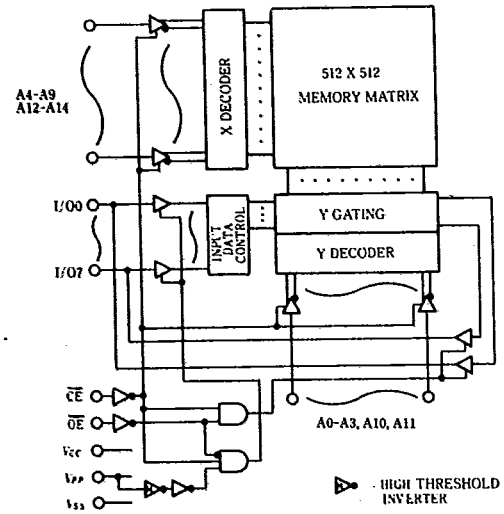

T-46-13-25

■ MODE SELECTION

Mode \ Pins	$\overline{CE}$ (20)	$\overline{OE}$ (22)	A9 (24)	V_{PP} (1)	V_{CC} (28)	I/O (11 – 13, 15 – 19)
Read	V_{IL}	V_{IL}	X	V_{CC}	V_{CC}	Dout
Output Disable	V_{IL}	V_{IH}	X	V_{CC}	V_{CC}	High Z
Standby	V_{IH}	X	X	V_{CC}	V_{CC}	High Z
High Performance Program	V_{IL}	V_{IH}	X	V_{PP}	V_{CC}	Din
Program Verify	V_{IH}	V_{IL}	X	V_{PP}	V_{CC}	Dout
Optional Verify	V_{IL}	V_{IL}	X	V_{PP}	V_{CC}	Dout
Program Inhibit	V_{IH}	V_{IH}	X	V_{PP}	V_{CC}	High Z
Identifier	V_{IL}	V_{IL}	V_H *2	V_{CC}	V_{CC}	Code

Notes) *1. X: Don't care.
*2. V_H: 12.0 ± 0.5V.

■ ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Value	Unit
Operating Temperature Range	T_{opr}	0 to +70	°C
Storage Temperature Range	T_{stg}	−55 to +125	°C
Storage Temperature Range Under Bias	T_{bias}	−10 to +80	°C
All Input and Output Voltage*1	V_{IN}, V_{OUT}	−0.6*2 to +7	V
Voltage on Pin 24 (A9)*1	V_{ID}	−0.6*2 to +13.5	V
V_{PP} Voltage*1	V_{PP}	−0.6 to +14	V
V_{CC} Voltage*1	V_{CC}	−0.6 to +7	V

Notes) *1. With respect to V_{SS}.
*2. −1.0V for pulse width ≦ 50ns.

■ READ OPERATION

● DC AND OPERATING CHARACTERISTICS (T_a = 0 ~ +70°C, V_{CC} = 5V ± 5%, V_{PP} = V_{CC})

Parameter	Symbol	Test Condition	min	typ	max	Unit
Input Leakage Current	I_{LI}	V_{in} = 5.25V	–	–	2	μA
Output Leakage Current	I_{LO}	V_{out} = 5.25V/0.45V	–	–	2	μA
V_{PP} Current	I_{PP1}	V_{PP} = 5.5V	–	1	20	μA
V_{CC} Current (Standby)	I_{SB1}	$\overline{CE}$ = V_{IH}	–	–	1	mA
	I_{SB2}	$\overline{CE}$ = V_{CC} ± 0.3V	–	1	20	μA
V_{CC} Current (Active)	I_{CC1}	$\overline{CE}$ = V_{IL}, I_{out} = 0 mA	–	–	30	mA
	I_{CC2}	f = 5 MHz, I_{out} = 0 mA	–	–	30	mA
	I_{CC3}	f = 1 MHz, I_{out} = 0 mA	–	–	8	mA
Input Voltage	V_{IL}		−0.3*1	–	0.8	V
	V_{IH}		2.2	–	V_{CC}+1.0*2	V
Output Voltage	V_{OL}	I_{OL} = 2.1 mA	–	–	0.45	V
	V_{OH1}	I_{OH} = −400 μA	2.4	–	–	V
	V_{OH2}	I_{OH} = −100 μA	V_{CC}−0.7	–	–	V

Notes) *1. −1.0V for pulse width ≦ 50ns.
*2. V_{CC} + 1.5V for pulse width ≦ 20ns. If V_{IH} is over the specified maximum value, read operation cannot be guaranteed.

T-46-13-25

• AC CHARACTERISTICS (T_a = 0 to +70°C, V_{CC} = 5V ± 5%, V_{PP} = V_{CC})


Parameter	Symbol	Test Condition	HN27C256FP-25T		HN27C256FP-30T		Unit
			Min	Max	Min	Max	
Address to Output Delay	t_{ACC}	$\overline{CE}$ = $\overline{OE}$ = V_{IL}	–	250	–	300	ns
$\overline{CE}$ to Output Delay	t_{CE}	$\overline{OE}$ = V_{IL}	–	250	–	300	ns
$\overline{OE}$ to Output Delay	t_{OE}	$\overline{CE}$ = V_{IL}	10	100	0	120	ns
$\overline{OE}$ High to Output Float	t_{DF}	$\overline{CE}$ = V_{IL}	0	60	0	105	ns
Address to Output Hold	t_{OH}	$\overline{CE}$ = $\overline{OE}$ = V_{IL}	0	–	0	–	ns

Note: t_{DF} is defined as the time at which the Output achieves the open circuit condition and Data is no longer driven.

• SWITCHING CHARACTERISTICS

TEST CONDITION

Input pulse levels: 0.45V to 2.4V
Input rise and fall time: ≤20ns
Output load: 1 TTL Gate +100pF
Reference level for measuring timing: 0.8V and 2.0V

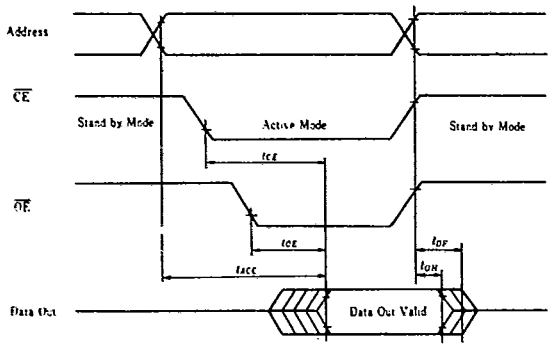


• CAPACITANCE (Ta=25°C, f=1MHz)

Parameter	Symbol	Test Condition	min.	typ.	max.	Unit.
Input Capacitance	C_{in}	V_{in} = 0 V	–	4	6	pF
Output Capacitance	C_{out}	V_{out} = 0 V	–	8	12	pF

■ HIGH PERFORMANCE PROGRAMMING

This device can be applied the High Performance Programming algorithm shown in following flowchart. This algorithm allows to obtain faster programming time without any voltage stress to the device nor deterioration in reliability of programmed data.

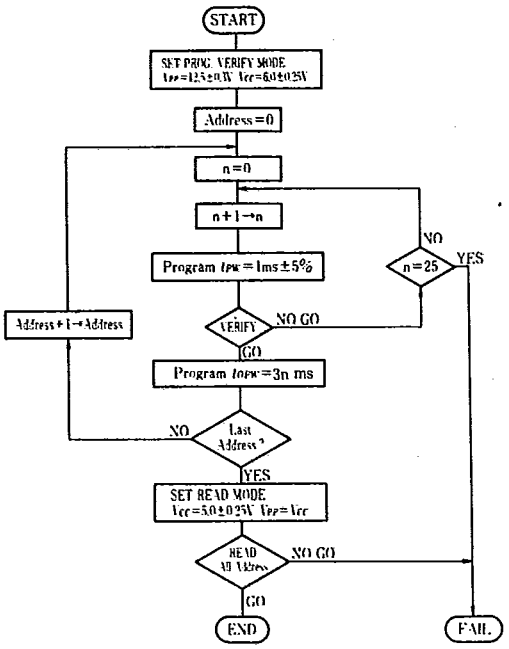

High Performance Programming Flowchart

■ HIGH PERFORMANCE PROGRAMMING OPERATION

• DC PROGRAMMING CHARACTERISTICS (Ta=25°C±5°C, V_{CC}=6V±0.25V, V_{PP}=12.5V±0.3V)

Parameter	Symbol	Test Condition	min.	typ.	max.	Unit
Input Leakage Current	I_{LI}	V_{IN} = 6.25V/0.45V	–	–	2	μA
Output Low Voltage During Verify	V_{OL}	I_{OL} = 2.1 mA	–	–	0.45	V
Output High Voltage During Verify	V_{OH}	I_{OH} = −400 μA	2.4	–	–	V
V_{CC} Current (Active)	I_{CC2}		–	–	30	mA
Input Low Level	V_{IL}		−0.1*5	–	0.8	V
Input High Level	V_{IH}		2.2	–	V_{CC}+0.5*6	V
V_{PP} Supply Current	I_{PP2}	$\overline{CE}$ = V_{IL}	–	–	40	mA

Notes) *1. V_{CC} must be applied before V_{PP} and removed after V_{PP}.
*2. V_{PP} must not exceed 14V including overshoot.
*3. An influence may be had upon device reliability if the device is installed or removed while V_{PP} = 12.5V.
*4. Do not alter V_{PP} either V_{IL} to 12.5V or 12.5V to V_{IL} when $\overline{CE}$ = Low.
*5. −0.6V for pulse width ≦ 20ns.
*6. If V_{IH} is over the specified maximum value, programming operation cannot be guaranteed.


• AC PROGRAMMING CHARACTERISTICS (Ta=25°C±5°C, V_{CC}=6V±0.25V, V_{PP}=12.5V±0.3V)

Parameter	Symbol	Test Condition	min.	typ.	max.	Unit
Address Setup Time	t_{AS}		2	–	–	µs
$\overline{OE}$ Setup Time	t_{OES}		2	–	–	µs
Data Setup Time	t_{DS}		2	–	–	µs
Address Hold Time	t_{AH}		0	–	–	µs
Data Hold Time	t_{DH}		2	–	–	µs
$\overline{OE}$ to Output Float Delay	t_{DF}*1		0	–	130	ns
V_{PP} Setup Time	t_{VPS}		2	–	–	µs
V_{CC} Setup Time	t_{VCS}		2	–	–	µs
$\overline{CE}$ Pulse Width During Initial Programming	t_{PW}		0.95	1.0	1.05	ms
$\overline{CE}$ Pulse Width During Overprogramming	t_{OPW}*2		2.85	–	78.75	ms
Data Valid from $\overline{OE}$	t_{OE}		0	–	150	ns

Notes: *1. t_{DF} is defined as the time at which the output achieves the open circuit condition and data is no longer driven.
*2. Refer to the programming flowchart for t_{OPW}.

• SWITCHING CHARACTERISTICS TEST CONDITION

Input pulse level: 0.45V to 2.4V
Input rise and fall time: ≤20ns
Reference level for measuring timing: 0.8V and 2V

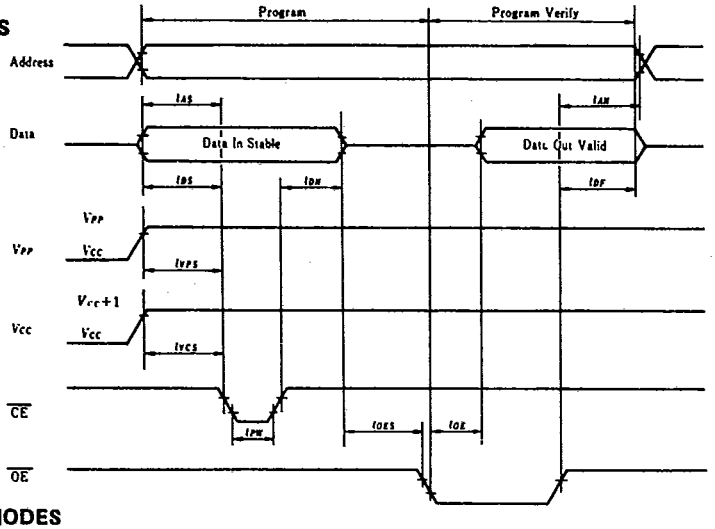


• HN27C256FP IDENTIFIER MODES

Pins / Identifier	A_0 (10)	I/O_7 (19)	I/O_6 (18)	I/O_5 (17)	I/O_4 (16)	I/O_3 (15)	I/O_2 (13)	I/O_1 (12)	I/O_0 (11)	Hex Data
Manufacturer Code	V_{IL}	0	0	0	0	0	1	1	1	07
Device Code	V_{IH}	1	0	1	1	0	0	0	0	B0

Notes: 1. A_9 = 12.0V ± 0.5V.
2. $A_1 - A_8$, $A_{10} - A_{14}$, $\overline{CE}$, $\overline{OE} = V_{IL}$.


■ RECOMMENDED SCREENING CONDITIONS

Before mounting, please make the screening (baking without bias) shown in the right.




Recommended Screening conditions


SUPPLY CURRENT vs. SUPPLY VOLTAGE

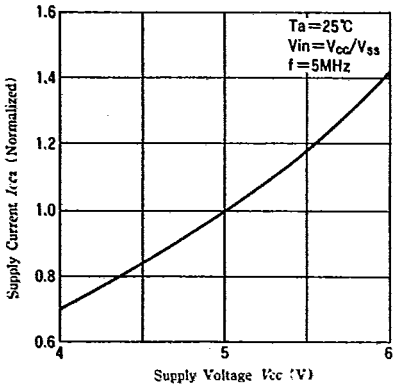


SUPPLY CURRENT vs. AMBIENT TEMPERATURE

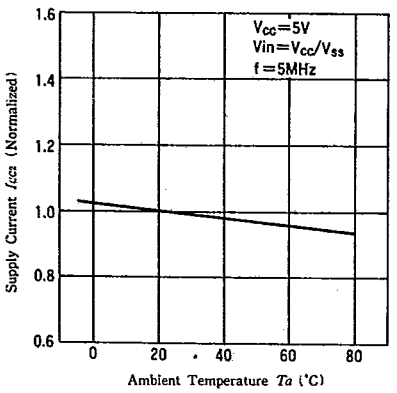


ADDRESS ACCESS TIME vs. SUPPLY VOLTAGE

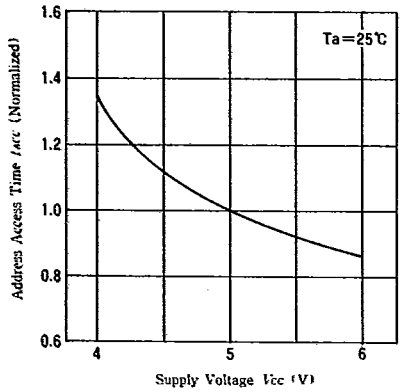


ADDRESS ACCESS TIME vs. AMBIENT TEMPERATURE

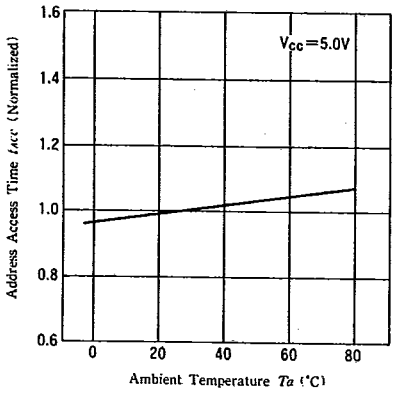

STANDBY CURRENT vs. SUPPLY VOLTAGE

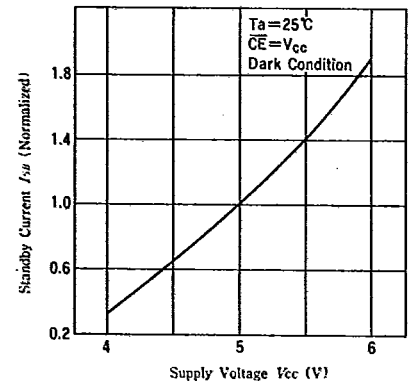

STANDBY CURRENT vs. AMBIENT TEMPERATURE

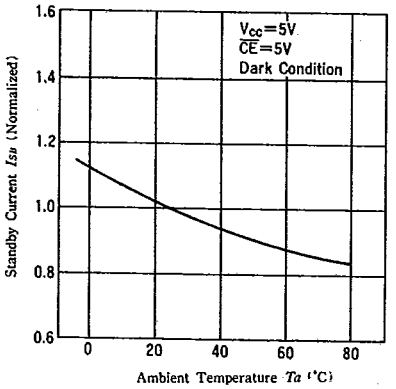

* See Supply Voltage vs. Active Frequency, Access Time vs. Lord Capacitance, and Output Current vs. Output Voltage (1), (2) of HN27C256G.