


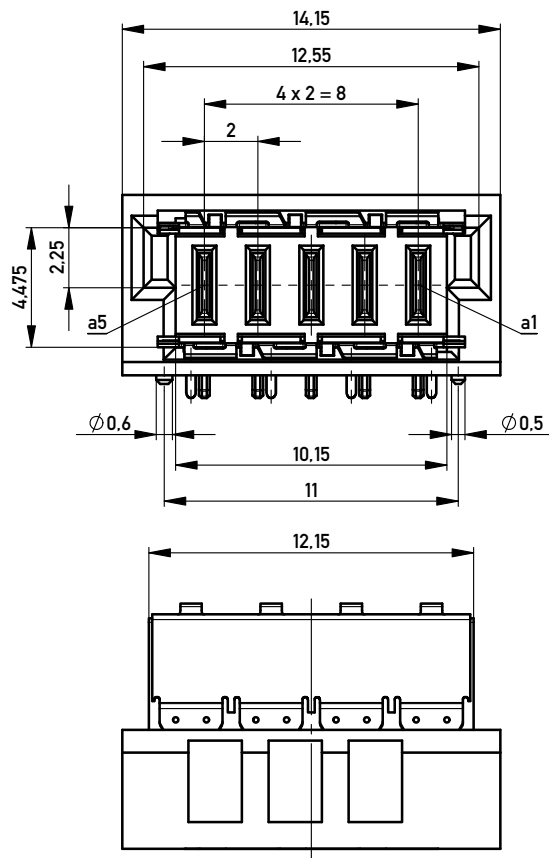


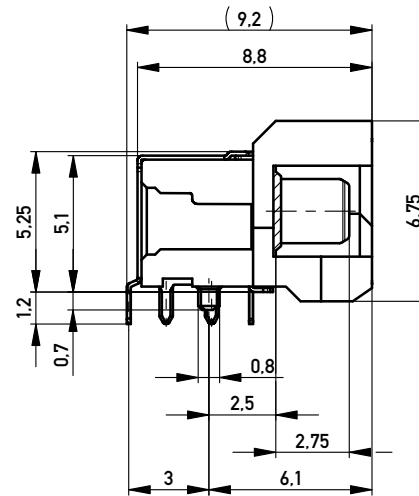


Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 400 Stück
Packaging unit: 400 pcs



Abspulrichtung - Reel off Direction

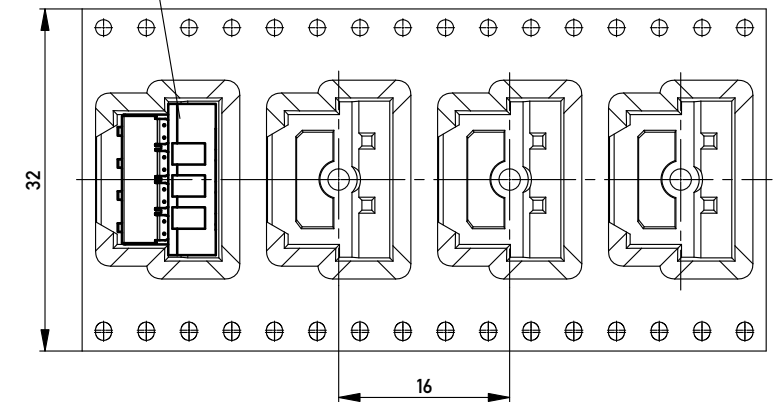

Leiterplatten-Layout Vorschlag / PCB-Layout Proposal

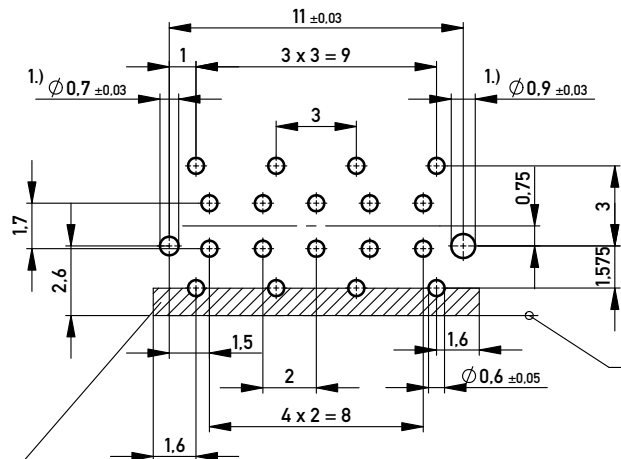

1.) Durchmesser des Bohrers /
Drill tool

Leiterplattenkante
Board edge

Schirmblechauflagefläche berücksichtigen,
keine Durchkontaktierungen oder Leitungen möglich!
Consider shielding contact area, no vias or traces possible!

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

BlindMate THR

Information:		Tolerances		Scale	5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
d		17.01.2014		MSpeed Messerl. 90° PM	
Index		Date		MSpeed male 90° PM	
				394572	
				I	
				A3	
				Class	
				MSPPM	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.

ERNI www.ERNI.com