

# MR3500L - MR3512L

**PRV : 50 - 1200 Volts**  
**Io : 35 Amperes**


## FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop

## MECHANICAL DATA :

- \* Case : Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Cathode polarity band
- \* Mounting position : Any
- \* Weight : 2.69 grams

# AUTOMOTIVE RECTIFIER DIODES

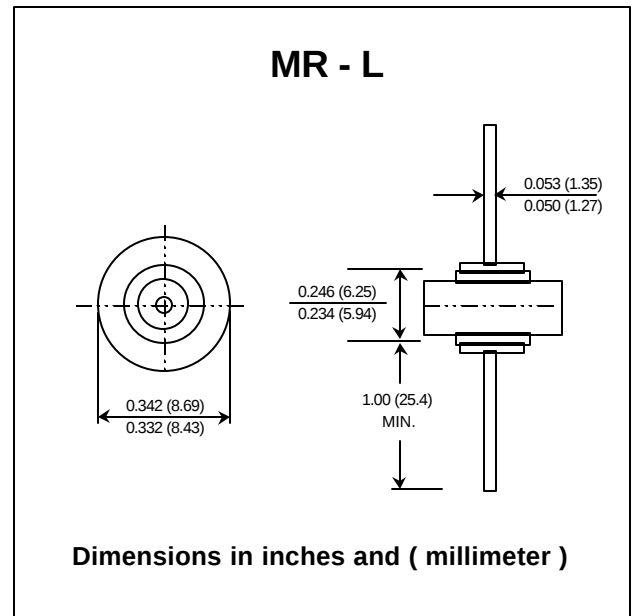


## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.


| RATING                                                                                              | SYMBOL          | MR 3500L      | MR 3501L | MR 3502L | MR 3504L | MR 3506L | MR 3508L | MR 3510L | MR 3512L | UNIT          |
|-----------------------------------------------------------------------------------------------------|-----------------|---------------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Maximum Repetitive Peak Reverse Voltage                                                             | $V_{RRM}$       | 50            | 100      | 200      | 400      | 600      | 800      | 1000     | 1200     | Volts         |
| Maximum RMS Voltage                                                                                 | $V_{RMS}$       | 35            | 70       | 140      | 280      | 420      | 560      | 700      | 840      | Volts         |
| Maximum DC Blocking Voltage                                                                         | $V_{DC}$        | 50            | 100      | 200      | 400      | 600      | 800      | 1000     | 1200     | Volts         |
| Average Rectified Forward Current $T_c = 150^{\circ}C$                                              | $I_{F(AV)}$     | 35            |          |          |          |          |          |          |          | Amps.         |
| Peak Forward Surge Current Single half sine wave superimposed on rated load (JEDEC Method)          | $I_{FSM}$       | 400           |          |          |          |          |          |          |          | Amps.         |
| Maximum Forward Voltage at $I_F = 35$ Amps.                                                         | $V_F$           | 1.1           |          |          |          |          |          |          |          | Volts         |
| Maximum DC Reverse Current $T_a = 25^{\circ}C$<br>at rated DC Blocking Voltage $T_a = 100^{\circ}C$ | $I_R$           | 5.0           |          |          |          |          |          |          |          | $\mu A$       |
|                                                                                                     | $I_{R(H)}$      | 1.0           |          |          |          |          |          |          |          | mA            |
| Thermal Resistance (Note 1)                                                                         | $R_{\theta JC}$ | 1.0           |          |          |          |          |          |          |          | $^{\circ}C/W$ |
| Junction Temperature Range                                                                          | $T_J$           | - 65 to + 175 |          |          |          |          |          |          |          | $^{\circ}C$   |
| Storage Temperature Range                                                                           | $T_{STG}$       | - 65 to + 175 |          |          |          |          |          |          |          | $^{\circ}C$   |

## RATING AND CHARACTERISTIC CURVES ( MR3500L - MR3512L )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

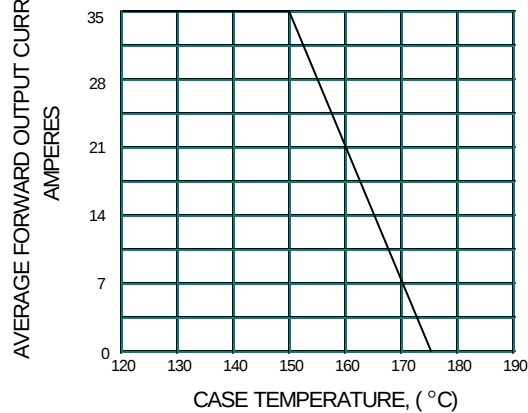

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

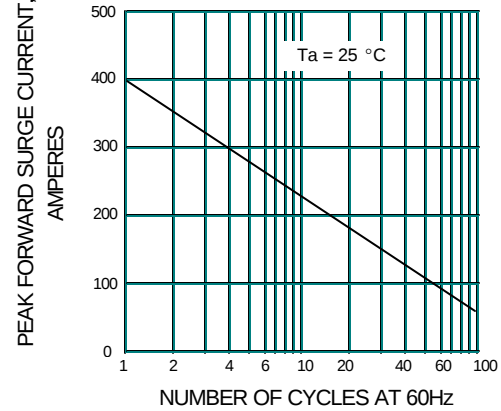

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

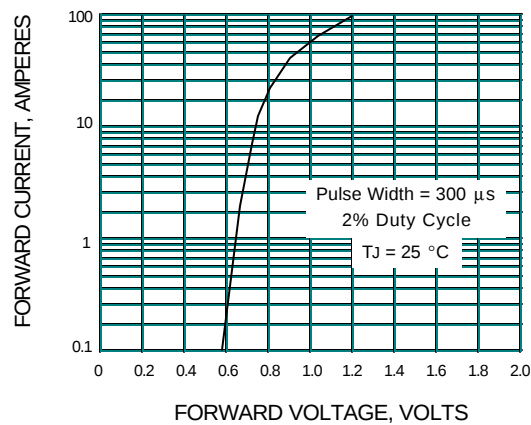

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

