



VM-60XX Series - CPE Micro Filters

Feature




- For use with VDSL Chipset.
- Operating Temp : -10 to +60
- Storage Temp : -25 to +75



Electrical Specifications @ 25

Part Number	Description	Passband Frequency	Insertion Loss (dB Max)	Return Loss (dB Min)	Stopband Frequency	Attenuation (dB Min)	Impedance (O)
VM-6063	LPF	DC to 125KHz	20KHz	125KHz	800KHz 7.9MHz	-65	150O
			-1	-15			
VM-6064	LPF	DC to 630KHz	20K	630KHz	900KHz 7.9MHz	-30	
			-1.5	-12			

Schematics

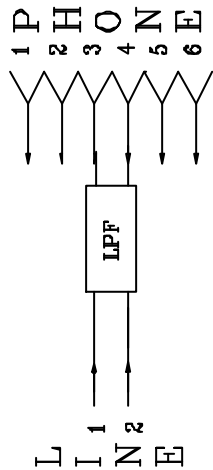

Mechanical

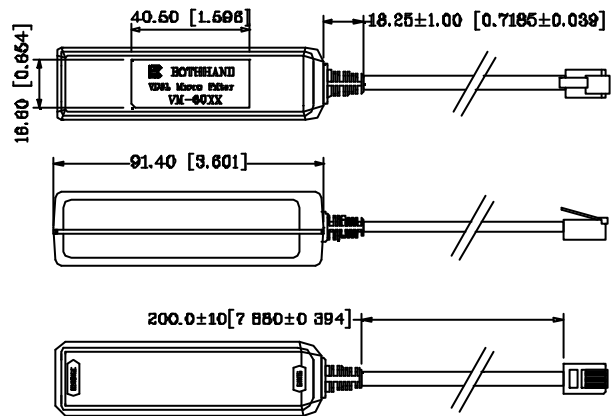

Units: mm [Inches]
 Tolerances: xxx.x±1.0 [0.039]
 xx.x0±0.25 [0.010]