EPCOS

SAW Components


Data Sheet B4233



Ceramic package **QCC8C**

Features

- Low-loss filter for TETRA
- Usable passband: 20 MHz
- Ceramic package for **S**urface **M**ounted **T**echnology (**SMT**)
- RoHS compliant

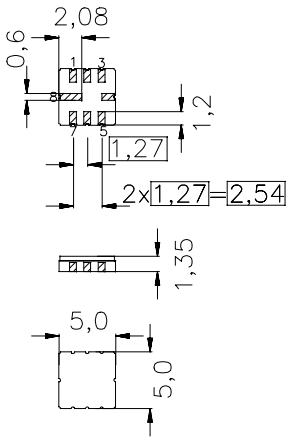


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,10 g

Pin configuration

1	Input [Filter 1]
3	Input [Filter 2]
5	Output [Filter 2]
7	Output [Filter 1]
2, 6	To be grounded
4, 8	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4233	B39421-B4233-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic **S**ensitive **D**evice (**ESD)**

Maximum ratings

Operable temperature range	T	– 30 / + 85	˚C	
Storage temperature range	T_{stg}	– 40 / + 85	˚C	
DC voltage	V_{DC}	3	V	
ESD voltage	V^*_{ESD}	100*	V	Machine Model, 10 pulses
Source power (CW)	P_S	12	dBm	

*-acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses

Characteristics Filter 1

Operating temperature range: T = +25°C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

				min.	typ.	max.	
Center frequency		f_c		—	390,0	—	MHz
Maximum insertion attenuation		α_{max}					
	380,0 ... 400,0	MHz		—	1,9	2,2	dB
Amplitude ripple (p-p)		$\Delta\alpha$					
	380,0 ... 400,0	MHz		—	0,7	1,1	dB
Input return loss							
	380,0 ... 400,0	MHz		10,0	11,0	—	dB
Output return loss							
	380,0 ... 400,0	MHz		10,0	12,0	—	dB
Attenuation		α_{abs}					
	0,1 ... 150,0	MHz		35,0	42,0	—	dB
	190,0 ... 200,0	MHz		30,0	41,0	—	dB
	228,0 ... 250,0	MHz		30,0	41,0	—	dB
	252,0 ... 275,0	MHz		30,0	39,0	—	dB
	275,0 ... 287,0	MHz		33,0	37,0	—	dB
	304,0 ... 320,0	MHz		30,0	34,0	—	dB
	320,0 ... 335,0	MHz		30,0	33,0	—	dB
	342,0 ... 360,0	MHz		20,0	25,0	—	dB
	418,0 ... 440,0	MHz		20,0	22,0	—	dB
	442,0 ... 455,0	MHz		25,0	31,0	—	dB
	456,0 ... 480,0	MHz		30,0	39,0	—	dB
	492,0 ... 531,0	MHz		30,0	42,0	—	dB
	532,0 ... 560,0	MHz		33,0	39,0	—	dB
	570,0 ... 600,0	MHz		25,0	35,0	—	dB
	632,0 ... 668,0	MHz		35,0	46,0	—	dB
	684,0 ...1000,0	MHz		27,0	34,0	—	dB

Characteristics Filter 1

Operating temperature range: T = -30 to +60˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω


				min.	typ.	max.	
Center frequency			f_c	—	390,0	—	MHz
Maximum insertion attenuation			α_{max}				
	380,0 ... 400,0	MHz		—	2,6	3,3	dB
Amplitude ripple (p-p)			$\Delta\alpha$				
	380,0 ... 400,0	MHz		—	1,4	2,3	dB
Input return loss							
	380,0 ... 400,0	MHz		10,0	11,0	—	dB
Output return loss							
	380,0 ... 400,0	MHz		10,0	12,0	—	dB
Attenuation			α_{abs}				
	0,1 ... 150,0	MHz		35,0	42,0	—	dB
	190,0 ... 200,0	MHz		30,0	41,0	—	dB
	228,0 ... 250,0	MHz		30,0	41,0	—	dB
	252,0 ... 275,0	MHz		30,0	39,0	—	dB
	275,0 ... 287,0	MHz		33,0	37,0	—	dB
	304,0 ... 320,0	MHz		30,0	33,0	—	dB
	320,0 ... 335,0	MHz		30,0	33,0	—	dB
	342,0 ... 360,0	MHz		20,0	25,0	—	dB
	418,0 ... 440,0	MHz		20,0	21,0	—	dB
	442,0 ... 455,0	MHz		25,0	31,0	—	dB
	456,0 ... 480,0	MHz		30,0	39,0	—	dB
	492,0 ... 531,0	MHz		30,0	42,0	—	dB
	532,0 ... 560,0	MHz		33,0	39,0	—	dB
	570,0 ... 600,0	MHz		25,0	35,0	—	dB
	632,0 ... 668,0	MHz		35,0	46,0	—	dB
	684,0 ...1000,0	MHz		27,0	34,0	—	dB

Characteristics Filter 1


Operating temperature range: T = -30 to +85˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

			min.	typ.	max.	
Center frequency	f_c		—	390,0	—	MHz
Maximum insertion attenuation	α_{max}					
380,0 ... 400,0	MHz		—	2,7	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
380,0 ... 400,0	MHz		—	1,5	2,3	dB
Input return loss						
380,0 ... 400,0	MHz		10,0	11,0	—	dB
Output return loss						
380,0 ... 400,0	MHz		10,0	12,0	—	dB
Attenuation	α_{abs}					
0,1 ... 150,0	MHz		35,0	42,0	—	dB
190,0 ... 200,0	MHz		30,0	41,0	—	dB
228,0 ... 250,0	MHz		30,0	41,0	—	dB
252,0 ... 275,0	MHz		30,0	39,0	—	dB
275,0 ... 287,0	MHz		33,0	37,0	—	dB
304,0 ... 320,0	MHz		30,0	33,0	—	dB
320,0 ... 335,0	MHz		30,0	33,0	—	dB
342,0 ... 360,0	MHz		20,0	25,0	—	dB
418,0 ... 440,0	MHz		20,0	21,0	—	dB
442,0 ... 455,0	MHz		25,0	31,0	—	dB
456,0 ... 480,0	MHz		30,0	39,0	—	dB
492,0 ... 531,0	MHz		30,0	42,0	—	dB
532,0 ... 560,0	MHz		33,0	39,0	—	dB
570,0 ... 600,0	MHz		25,0	35,0	—	dB
632,0 ... 668,0	MHz		35,0	46,0	—	dB
684,0 ...1000,0	MHz		27,0	34,0	—	dB

Transfer function of filter 1 (passband)

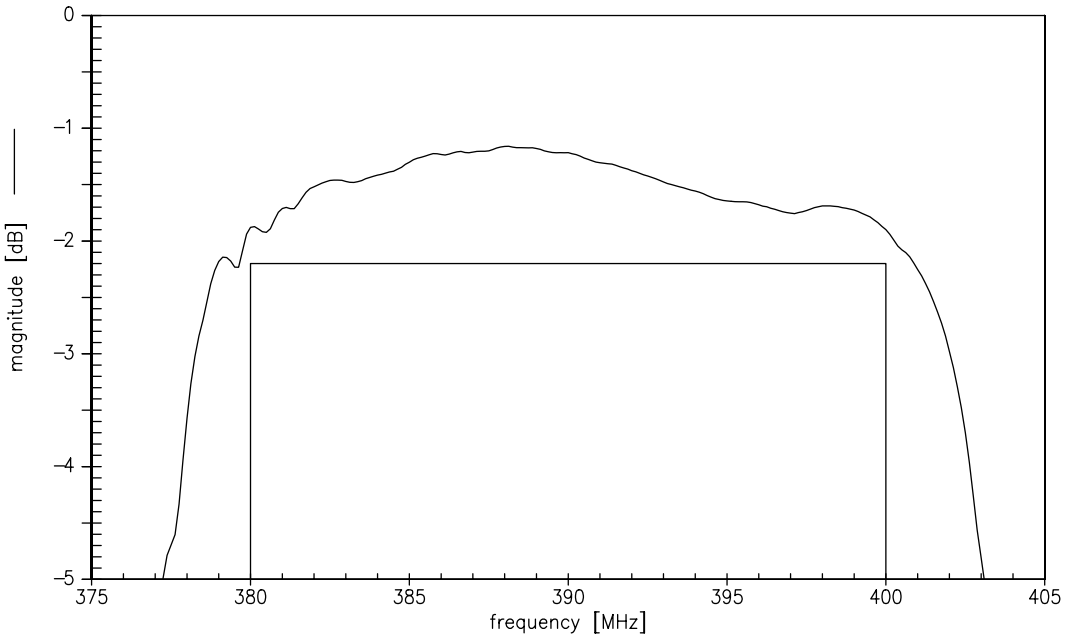

Transfer function of filter 1 (narrow band)

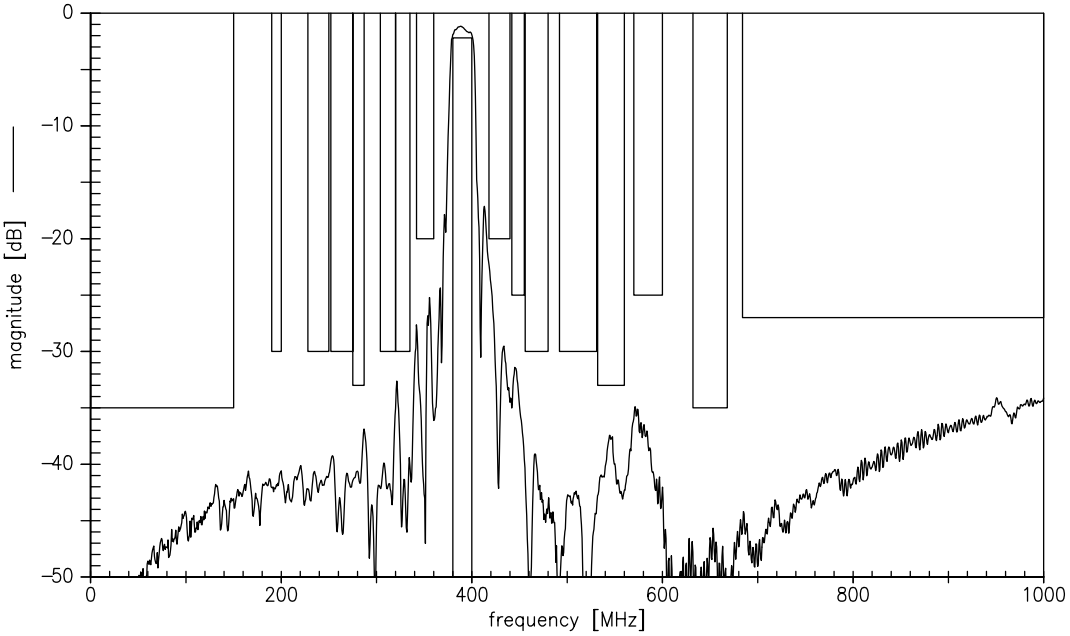

Characteristics Filter 2

Operating temperature range: T = +25˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

			min.	typ.	max.	
Center frequency	f_c		—	420,0	—	MHz
Maximum insertion attenuation	α_{max}					
410,0 ... 430,0	MHz		—	1,9	2,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
410,0 ... 430,0	MHz		—	0,6	1,0	dB
Input return loss						
410,0 ... 430,0	MHz		10,0	11,5	—	dB
Output return loss						
410,0 ... 430,0	MHz		10,0	13,5	—	dB
Attenuation	α_{abs}					
0,1 ... 150,0	MHz		35,0	42,0	—	dB
204,0 ... 216,0	MHz		30,0	41,0	—	dB
246,0 ... 270,0	MHz		30,0	41,0	—	dB
272,0 ... 301,0	MHz		35,0	41,0	—	dB
328,0 ... 344,0	MHz		30,0	42,0	—	dB
345,0 ... 360,0	MHz		25,0	31,0	—	dB
369,0 ... 387,0	MHz		18,0	23,0	—	dB
451,0 ... 473,0	MHz		20,0	23,0	—	dB
477,0 ... 491,0	MHz		25,0	35,0	—	dB
492,0 ... 516,0	MHz		30,0	39,0	—	dB
532,0 ... 573,0	MHz		30,0	38,0	—	dB
574,0 ... 602,0	MHz		33,0	39,0	—	dB
602,0 ...1000,0	MHz		27,0	34,0	—	dB

Characteristics Filter 2

Operating temperature range: T = -30 to +60˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω


			min.	typ.	max.	
Center frequency		f_c	—	420,0	—	MHz
Maximum insertion attenuation		α_{max}				
	410,0 ... 430,0 MHz		—	2,4	3,3	dB
Amplitude ripple (p-p)		$\Delta\alpha$				
	410,0 ... 430,0 MHz		—	1,1	2,2	dB
Input return loss						
	410,0 ... 430,0 MHz		10,0	11,5	—	dB
Output return loss						
	410,0 ... 430,0 MHz		10,0	13,5	—	dB
Attenuation		α_{abs}				
	0,1 ... 150,0 MHz		35,0	42,0	—	dB
	204,0 ... 216,0 MHz		30,0	41,0	—	dB
	246,0 ... 270,0 MHz		30,0	41,0	—	dB
	272,0 ... 301,0 MHz		35,0	41,0	—	dB
	328,0 ... 344,0 MHz		30,0	35,0	—	dB
	345,0 ... 360,0 MHz		25,0	31,0	—	dB
	369,0 ... 387,0 MHz		18,0	23,0	—	dB
	451,0 ... 473,0 MHz		20,0	21,0	—	dB
	477,0 ... 491,0 MHz		25,0	35,0	—	dB
	492,0 ... 516,0 MHz		30,0	39,0	—	dB
	532,0 ... 573,0 MHz		30,0	38,0	—	dB
	574,0 ... 602,0 MHz		33,0	39,0	—	dB
	602,0 ...1000,0 MHz		27,0	34,0	—	dB

Characteristics Filter 2


Operating temperature range: T = -30 to +85˚C
Terminating source impedance: Z_S = 50 Ω
Terminating load impedance: Z_L = 50 Ω

		min.	typ.	max.	
Center frequency	f_c	—	420,0	—	MHz
Maximum insertion attenuation	α_{max}				
410,0 ... 430,0 MHz		—	2,5	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
410,0 ... 430,0 MHz		—	1,2	2,2	dB
Input return loss					
410,0 ... 430,0 MHz		10,0	11,5	—	dB
Output return loss					
410,0 ... 430,0 MHz		10,0	13,5	—	dB
Attenuation	α_{abs}				
0,1 ... 150,0 MHz		35,0	42,0	—	dB
204,0 ... 216,0 MHz		30,0	41,0	—	dB
246,0 ... 270,0 MHz		30,0	41,0	—	dB
272,0 ... 301,0 MHz		35,0	41,0	—	dB
328,0 ... 344,0 MHz		30,0	35,0	—	dB
345,0 ... 360,0 MHz		25,0	31,0	—	dB
369,0 ... 387,0 MHz		18,0	23,0	—	dB
451,0 ... 473,0 MHz		20,0	21,0	—	dB
477,0 ... 491,0 MHz		25,0	35,0	—	dB
492,0 ... 516,0 MHz		30,0	39,0	—	dB
532,0 ... 573,0 MHz		30,0	38,0	—	dB
574,0 ... 602,0 MHz		33,0	39,0	—	dB
602,0 ...1000,0 MHz		27,0	34,0	—	dB

Transfer function of filter 2 (passband)

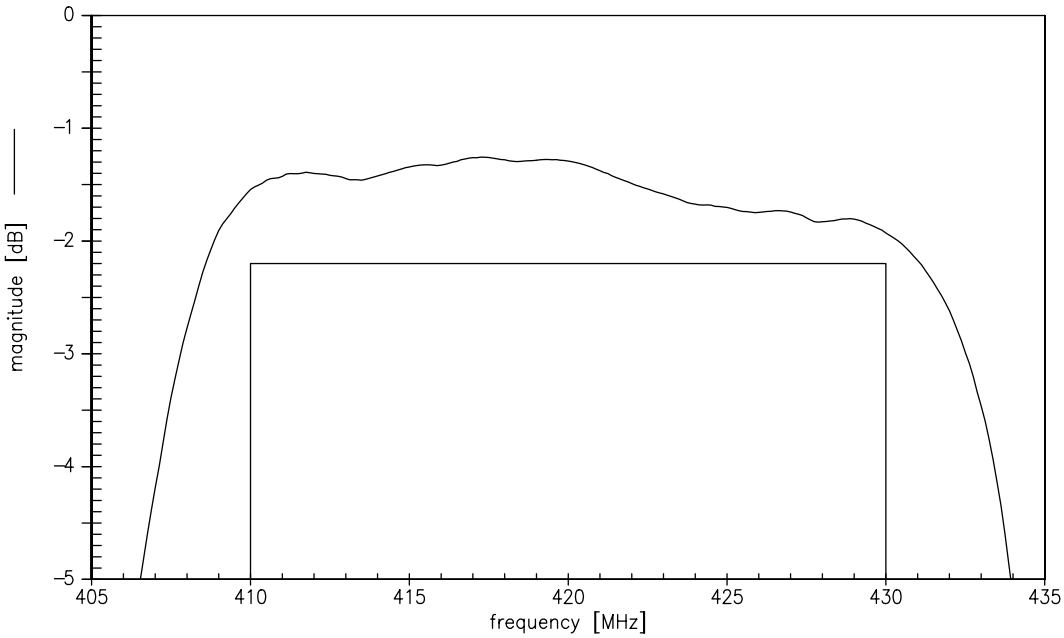

Transfer function of filter 2 (narrow band)

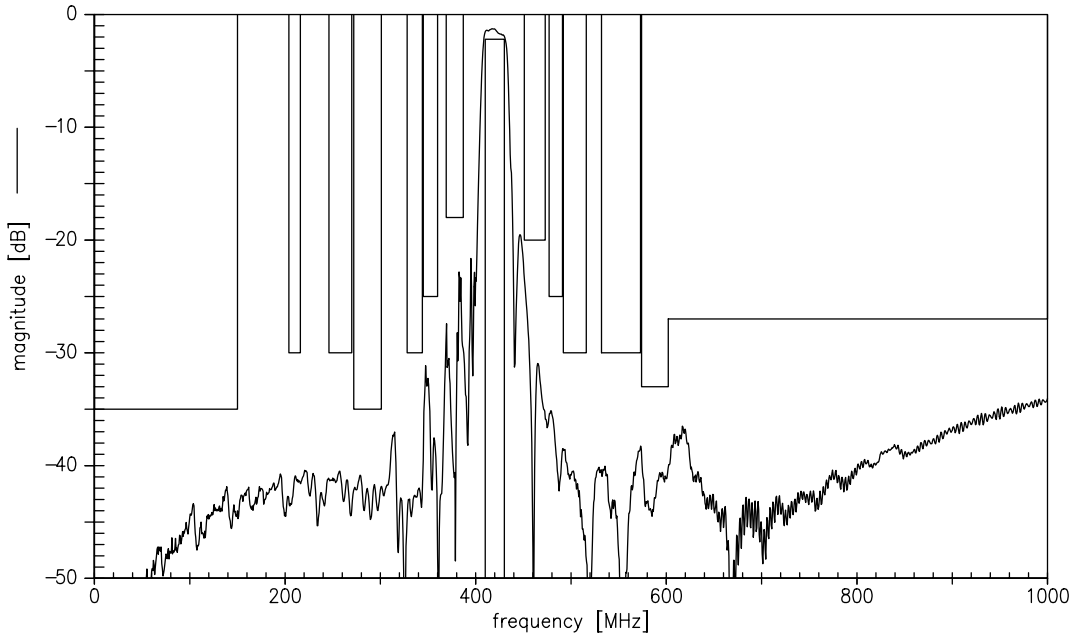

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW COM WT PD
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2006. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.