


SE Series

When the surge energy much higher than the rated maximum energy is applied to the varistors, it may blow up and catch fire.
Our newly developed TNR SE series is to prevent from being caught fire even very high surge energy is applied.
Thus electric appliance using our TNR SE series can be much safer.



◆FEATURES


- Newly developed non-flammable material (Halogen Free) is used for outer coating.
- The new outer coating will meet UL flammability test.
- At the over voltage test, the new material shall deter burning caused by the high temperature, arc and the large surge current when TNR shall blow up.
- General specifications are same as that of V series, large surge capability TNR.

◆APPLICATIONS

- Protection for semiconductors from over voltage.
- Protection for electronic instruments from lightning surge.
- Absorption of on-off surge from motors and relays.

Operating Temperature Range: -40~+85°C
Storage Temperature Range: -50~+125°C

◆PART NUMBERING SYSTEM

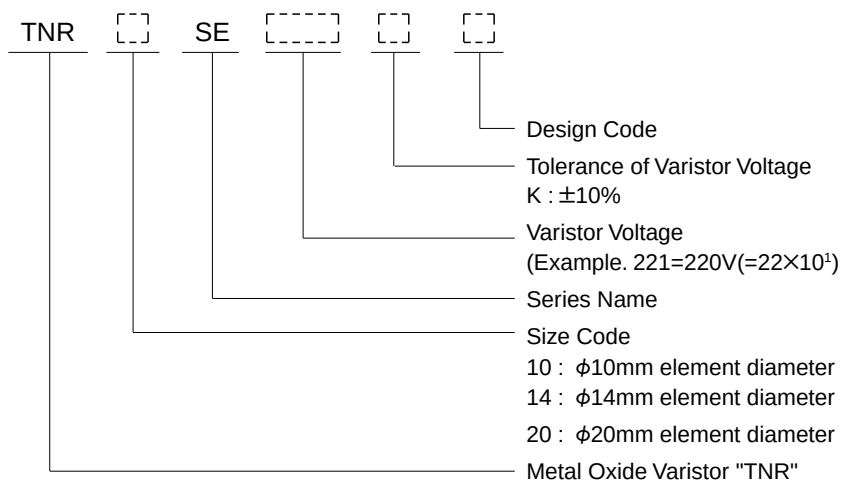


SE Series

◆ RATINGS AND CHARACTERISTICS

Model Number	Maximum Allowable Voltage		Maximum Peak Current	Maximum Energy	Rated Wattage	Maximum Clamping Voltage		Capacitance Typical	Varistor Voltage V1mA
	AC. (Vrms)	DC. (V)	8/20μSec. (A)	2mSec. (J)	(W)	(A)	(V)	(pF)	(V)
TNR10SE221K	140	180	3,500/1 time	27.5	0.4	25	360	450	220 (198~242)
TNR10SE241K	150	200		30.0			395	400	240 (216~264)
TNR10SE271K	175	225		35.0			455	350	270 (247~303)
TNR10SE431K	275	350	2,500/2 times	55.0			710	240	430 (387~473)
TNR10SE471K	300	385		60.0			775	220	470 (423~517)
TNR10SE621K	385	505		67.0			1,025	180	620 (558~682)
TNR14SE221K	140	180	6,000/1 time	55.0	0.6	50	360	850	220 (198~242)
TNR14SE241K	150	200		60.0			395	800	240 (216~264)
TNR14SE271K	175	225		70.0			455	700	270 (247~303)
TNR14SE431K	275	350	5,000/2 times	110.0			710	460	430 (387~473)
TNR14SE471K	300	385		125.0			775	420	470 (423~517)
TNR14SE621K	385	505		136.0			1,025	330	620 (558~682)
TNR20SE221K	140	180	10,000/1 time	110.0	1.0	100	360	2,500	220 (198~242)
TNR20SE241K	150	200		120.0			395	2,300	240 (216~264)
TNR20SE271K	175	225		135.0			455	2,000	270 (247~303)
TNR20SE431K	275	350	7,000/2 times	215.0			710	1,300	430 (387~473)
TNR20SE471K	300	385		250.0			775	1,200	470 (423~517)
TNR20SE621K	385	505		273.0			1,025	900	620 (558~682)

◆ DIMENSIONS [mm]

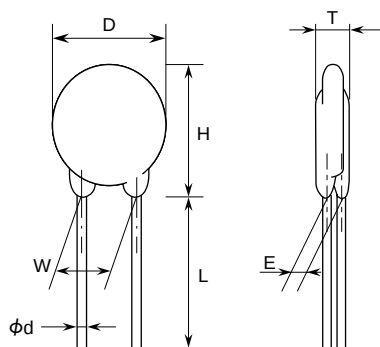

Model Number	D Max.	H Max.	T Max.	L Min.	φd ±0.05	W ±1.0	E ±1.0					
TNR10SE221K	13.0	17.5	6.9	20	0.8	7.5	2.0					
TNR10SE241K			8.2				2.1					
TNR10SE271K							2.3					
TNR10SE431K			3.1									
TNR10SE471K	14.0	18.5	11.5	20	0.8	7.5	3.3					
TNR10SE621K			4.2									
TNR14SE221K			17.5				22.0	6.9	20	0.8	7.5	2.0
TNR14SE241K								8.2				2.1
TNR14SE271K	2.3											
TNR14SE431K	3.1											
TNR14SE471K	18.5	24.0	11.5	20	0.8	7.5	3.3					
TNR14SE621K			4.2									
TNR20SE221K			22.5				27.5	7.4	20	0.8	10.0	2.2
TNR20SE241K								8.7				2.3
TNR20SE271K	2.5											
TNR20SE431K	3.3											
TNR20SE471K	24.5	29.5	12.0	20	0.8	10.0	3.5					
TNR20SE621K			4.4									



SE Series

◆V-I CURVE

V-I characteristics is same as that of V series.
Please see V-I Curve of V series.

CROSS REFERENCE TABLE

TNR SE SERIES	TNR V SERIES
TNR10SE221K TNR10SE241K TNR10SE271K TNR10SE431K TNR10SE471K TNR10SE621K	TNR10V221K TNR10V241K TNR10V271K TNR10V431K TNR10V471K TNR10V621K
TNR14SE221K TNR14SE241K TNR14SE271K TNR14SE431K TNR14SE471K TNR14SE621K	TNR14V221K TNR14V241K TNR14V271K TNR14V431K TNR14V471K TNR14V621K
TNR20SE221K TNR20SE241K TNR20SE271K TNR20SE431K TNR20SE471K TNR20SE621K	TNR20V221K TNR20V241K TNR20V271K TNR20V431K TNR20V471K TNR20V621K

SE Series

◆GENERAL SPECIFICATIONS

Operating Temperature Range: -40~+85°C
Storage Temperature Range: -50~+125°C

Item	Test Conditions	Specifications
Standard Test Condition	20±5°C, 65±20% RH unless specified. However, if it does not affect test result, the condition can be 20±15°C, 65±20% RH also.	
Varistor Voltage	The voltage between the two terminals measured at 1mA DC is called Varistor Voltage. The measurement shall be made as fast as possible to avoid heat effect.	Satisfy the specification
Maximum Allowable Voltage	Maximum continuous AC voltage (50~60Hz AC) and maximum DC voltage which can be applied.	Satisfy the specification
Maximum Peak Surge Current	Maximum surge current (8/20µSec. pulse wave to be applied once, or twice, 2 minute apart) for varistor voltage change within ±10% of the initial value.	Satisfy the specification
Energy Rating	Maximum energy (2mSec. square wave to be applied once) for varistor voltage change within ±10% of the initial value.	Satisfy the specification
Rated Wattage	Maximum power (50~60Hz AC power to be applied for 1,000 hours at 85±2°C) for varistor voltage change within ±10% of the initial value.	Satisfy the specification
Maximum Clamping Voltage	Maximum voltage across varistor when 8/20µSec. rated current surge is applied.	Satisfy the specification
Capacitance	Varistor's capacitance at 1kHz, standard test condition.	For reference only.
Voltage Temperature Coefficient	$\frac{V1mA \text{ at } 85^{\circ}C - V1mA \text{ at } 25^{\circ}C}{V1mA \text{ at } 25^{\circ}C} \times \frac{1}{60} \times 100 (\%/^{\circ}C)$ V1mA : Actual Varistor Voltage	Within ±0.05%/°C
Insulation	Short circuit the two leads of varistor, and put the varistor body into lead balls (1.6mm diameter) leaving 2mm epoxy coating outside. Then, apply 2.5kVrms between the leads and the lead balls for 60±5 seconds.	The varistor shall withstand with no abnormality.

◆RELIABILITY CHARACTERISTICS

Item	Test Conditions	Specifications
Heat Cycle	Subject varistor to the following temperature cycles. -40°C for 30 minutes → Normal room temperature for 10 minutes → 85°C for 30 minutes → Normal room temperature for 10 minutes. This completes one cycle. The cycle shall be repeated 50 times total. After the cycles, the varistor shall be stored at normal room temperature for one hour. Then check the varistor voltage and the appearance.	$\Delta V1mA \leq \pm 5\%$ No appearance abnormality.
High Temperature Exposure	Store varistor at 125°C for 1,000 hours. After that, store the varistor at normal room temperature for one hour. Then check the varistor voltage.	$\Delta V1mA \leq \pm 5\%$
Humidity Resistivity	Store at 40°C, 90~95% RH for 1,000 hours. After that, store the varistor at normal room temperature for one hour. Then check the varistor voltage.	$\Delta V1mA \leq \pm 5\%$
High Temperature Operation	Apply maximum applied voltage to varistor at 85°C for 1,000 hours. After that, store the varistor at normal room temperature for one hour. Then check the varistor voltage.	$\Delta V1mA \leq \pm 10\%$

SE Series

◆MECHANICAL CHARACTERISTICS

Item	Test Conditions	Specifications
Soldering Heat Resistivity	Store varistor at normal room temperature. Dip the varistor leads to solder, at 350±10℃ for 3± $\frac{1}{0}$ seconds, up to 2.0~2.5 mm from the varistor body. After that, store the varistor at normal room temperature for 30 minutes, and measure the varistor voltage.	ΔV1mA ≤±5% Vc : Actual varistor voltage No mechanical damages
Solderability	Dip varistor leads to methanol solution (JIS K 1501, about 25%) of rosin (JIS Z 5902) for 5~10 seconds. Then, dip the lead to solder (JIS Z 3282 H60A or H63A) at 225~240℃, up to 2.0~2.5mm from the varistor body for 5±0.5 seconds. Then, check the solderability.	At least, 95% of the surface dipped to solder shall be covered by new solder.
Lead Pull Strength	Fix varistor body, and suspend specified weight toward direction of lead axis. Lead diameter Force φ0.6mm, φ0.8mm 10 N	No abnormality such as disconnection. ΔV1mA ≤±5%
Lead Bend Strength	The varistor shall be secured with its terminal kept vertical and the force specified below shall be applied in the axial direction. The terminal shall gradually be bend by 90 in one direction then back to original position. The damage of the terminal shall be visually examined. Lead diameter Force φ0.6mm, φ0.8mm 2.5 N	No remarkable damage as remarkable the inner ceramic element or terminal open.
Vibration Resistivity	Mount varistor body on vibrator, and conduct following vibration test. Peak-to-Peak amplitude : 1.5mm Vibration frequency range : 10Hz~55Hz Sweeping time: Approximately one minute for 10Hz → 55Hz → 10Hz Direction and duration of vibration : Three directions of X, Y and Z. Two hours each. Six hours total.	No remarkable appearance abnormality. ΔV1mA ±5%
Flammability test	The varistor shall be subjected to 60 second applications of test flame. Burner : Bunsen gas burner 9000kcal / m³ Diameter of flame nozzle : φ9.5 mm Position : The specimen shall be fixed horizontal. Point of application shall be approximately center of the specimen.	No catching fire, and no flaming drops.