



4PIN以上





2PIN和3PIN



Recommend PCB Layout

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 1500V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 500\text{M}\Omega$
- Contact resistance(接触电阻): $\leq 10\text{m}\Omega$
- After environmental testing(环境测试后): $\leq 20\text{m}\Omega$

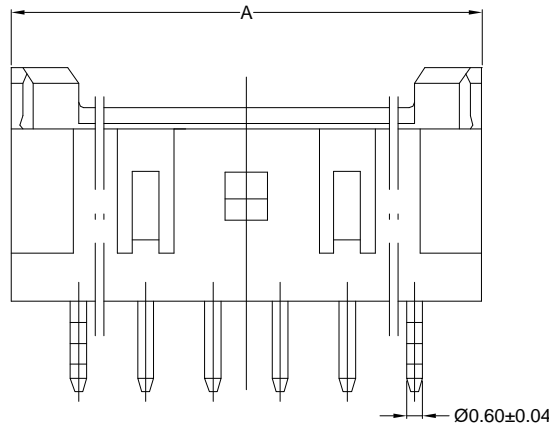

Poles	Dimensions (mm)		
	A	B	C
2	7.50	5.80	2.50
3	10.00	8.30	5.00
4	12.50	10.80	7.50
5	15.00	13.30	10.00
6	17.50	15.80	12.50
7	20.00	18.30	15.00
8	22.50	20.80	17.50
9	25.00	23.30	20.00
10	27.50	25.80	22.50
11	30.00	28.30	25.00
12	32.50	30.80	27.50
13	35.00	33.30	30.00
14	37.50	35.80	32.50
15	40.00	38.30	35.00

X2508 W V X-XX X-N0 SN XX

- ① 系列
- ② 类别: W-WAFER类
- ③ 外观形态:
V-180°
- ④ 成型方式:
空码-DIP
- ⑤ PIN数:
单排-XX
- ⑥ 空PIN位置及特殊码
- ⑦ 材质:
N0-PA66 94V-0 N2-PA66 94V-2
- ⑧ 电镀类别:G**-镀金 V**-镀全金
*01-1U" *02-2U" *03-3U" *05-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
SN-镀亮锡(70-120U") SN1-镀亮锡(120U"Min.)
SW-镀雾锡 HS-高温锡
- ⑨ 颜色:
空码-本色或普通色

X2508WV-XX-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X2508H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工业精密有限公司

DSND	DATE	SCALE: N/A	MODEL TYPE: X2508WV-XX-N0SN
DWN	DATE	VIEW:	PART NO.: 2.50 mm Crimp Style connectors
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	
UNSPECIFIED TOLERANCES			WEIGHT 1.0g
KXB INDUSTRIAL PRECISION CO., LIMITED			SHEET 1/1
			REVISION A0

△ X	ANGULAR	± 5°
△ X	L ≤ 4	± 0.2
△ X	4 < L ≤ 16	± 0.3
△ X	16 < L ≤ 63	± 0.4
MARK	L > 63	± 0.5
DESCRIPTION		DATE
REVISED		APPROVED
Authorized Signature(s)		