



NOTES:


1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. OPERATING FORCE: 425 ± 100 CM/STANDARD
7. OPERATING TEMP: -30° to 85°C
8. CIRCUIT DP: 6 POSITIONS, NON SHORTING, 30° INDEX.
9. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
10. DESIGNATE MAJOR DIMENSIONS
11. HARDWARE SUPPLIED ON SWITCH - SEE BELOW
STOPRING, LOCKWASHER, & HEXNUT
12. ▲ DENOTES CRITICAL PARAMETER.

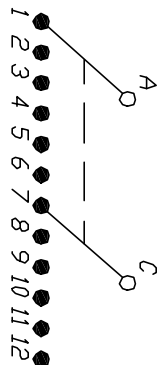

CONTACT CONFIGURATION
Timing: NON-SHORTING

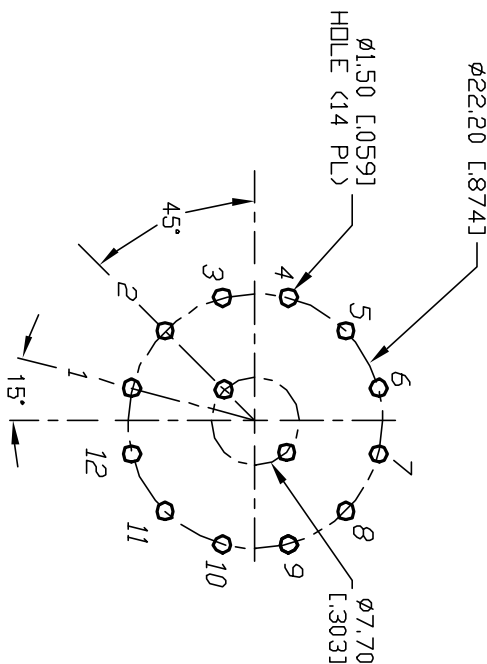

RECOMMENDED P.C.B. LAYOUT

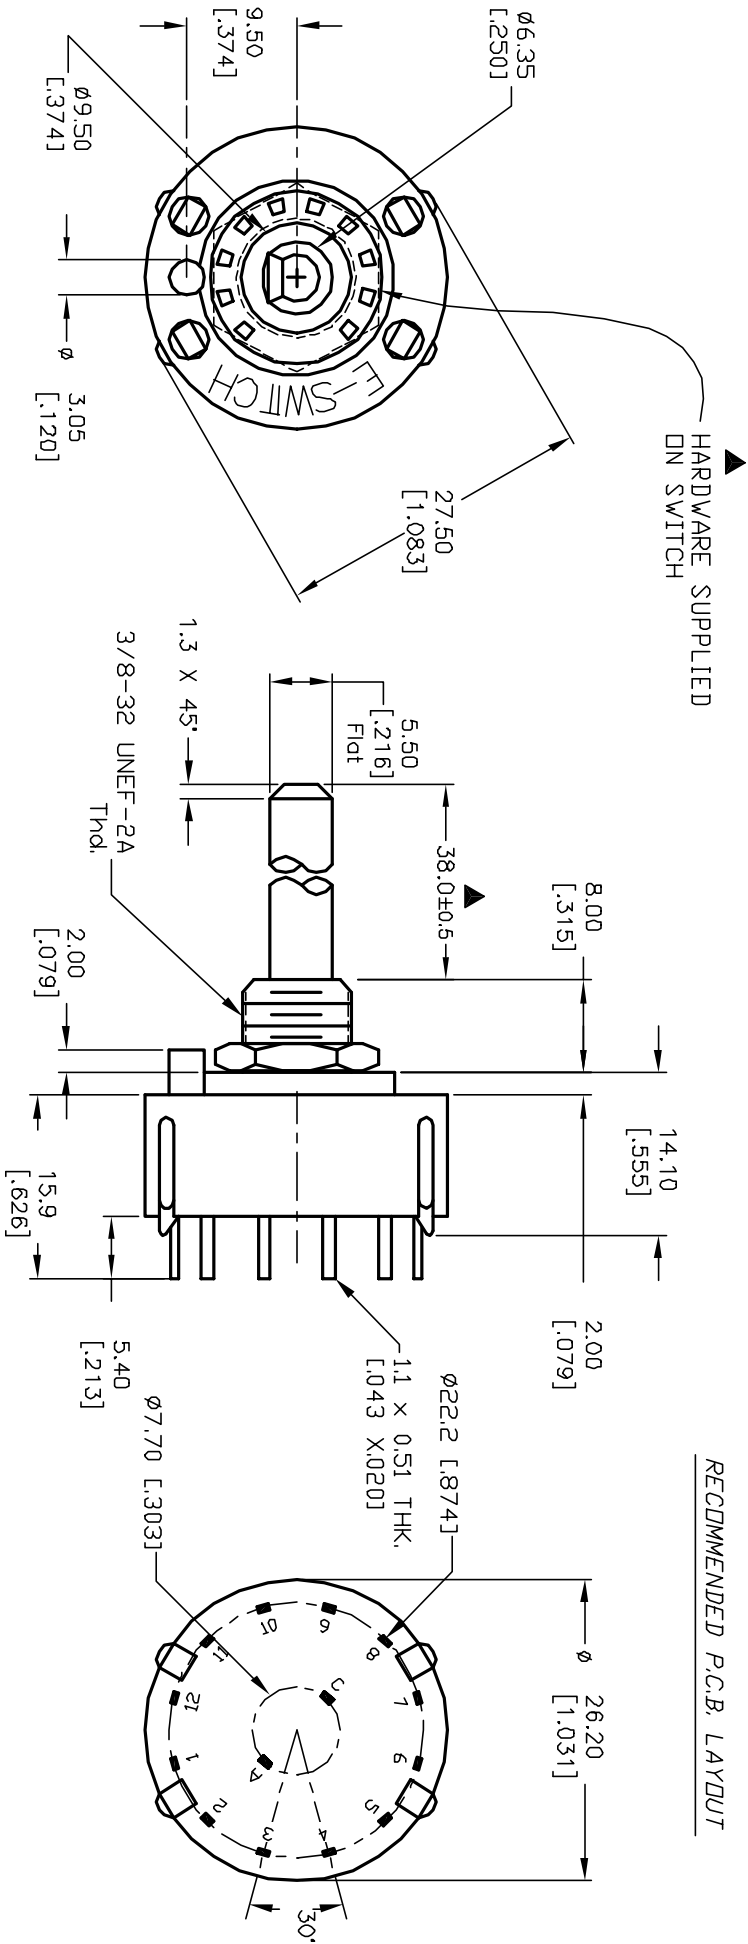

E-SWITCH®

TITLE		DATE		DR		DWG		REV	
KC26A38.001NPS		3/27/03		AR		G523761		A	
SCALE		DATE		DR		DWG		REV	
1.5:1		3/27/03		AR		G523761		A	
DESCRIPTION		DATE		CHKD		SCALE		REV	
RELEASED FOR PRODUCTION		3/27/03		AR		1.5:1		A	
REV. ECN No.		DATE		CHKD		SCALE		REV	
12970		3/27/03		AR		1.5:1		A	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND ITS NOT TO BE COPIED OR TRANSFERRED		DATE		CHKD		SCALE		REV	
		3/27/03		AR		1.5:1		A	