

(2.00 mm) .0787"

TCMD SERIES

# HIGH RELIABILITY IDC HEADER CABLE

Mates with:  
SMM\*, MMS\*, ESQT,  
PTF, SQT, SQW, TLE

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TCMD](http://www.samtec.com?TCMD)

**Insulator Material:**  
Black Glass Filled Polyester  
**Terminal:**  
Phosphor Bronze  
**Plating:**  
Au or Sn over  
50 μm (1.27 μm) Ni  
**Wire:**  
28 AWG 7/36 Stranded,  
Tinned, Copper with  
Gray PVC Insulator  
**Operating Temp Range:**  
-40 °C to +105 °C  
**RoHS Compliant:**  
Yes



## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



## ALSO AVAILABLE (MOQ Required)

- Other sizes
- Contact Samtec.

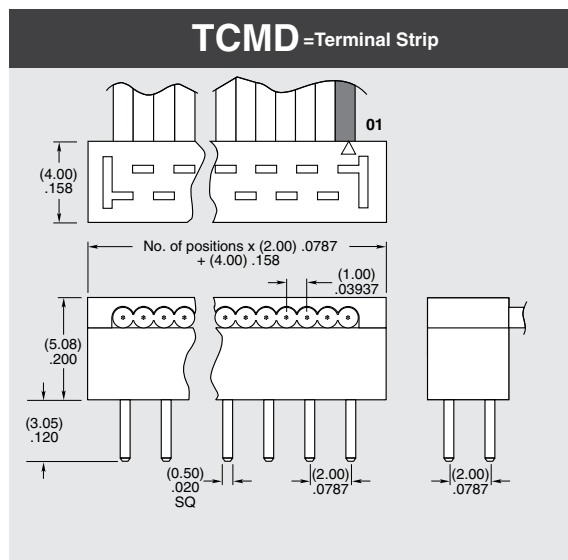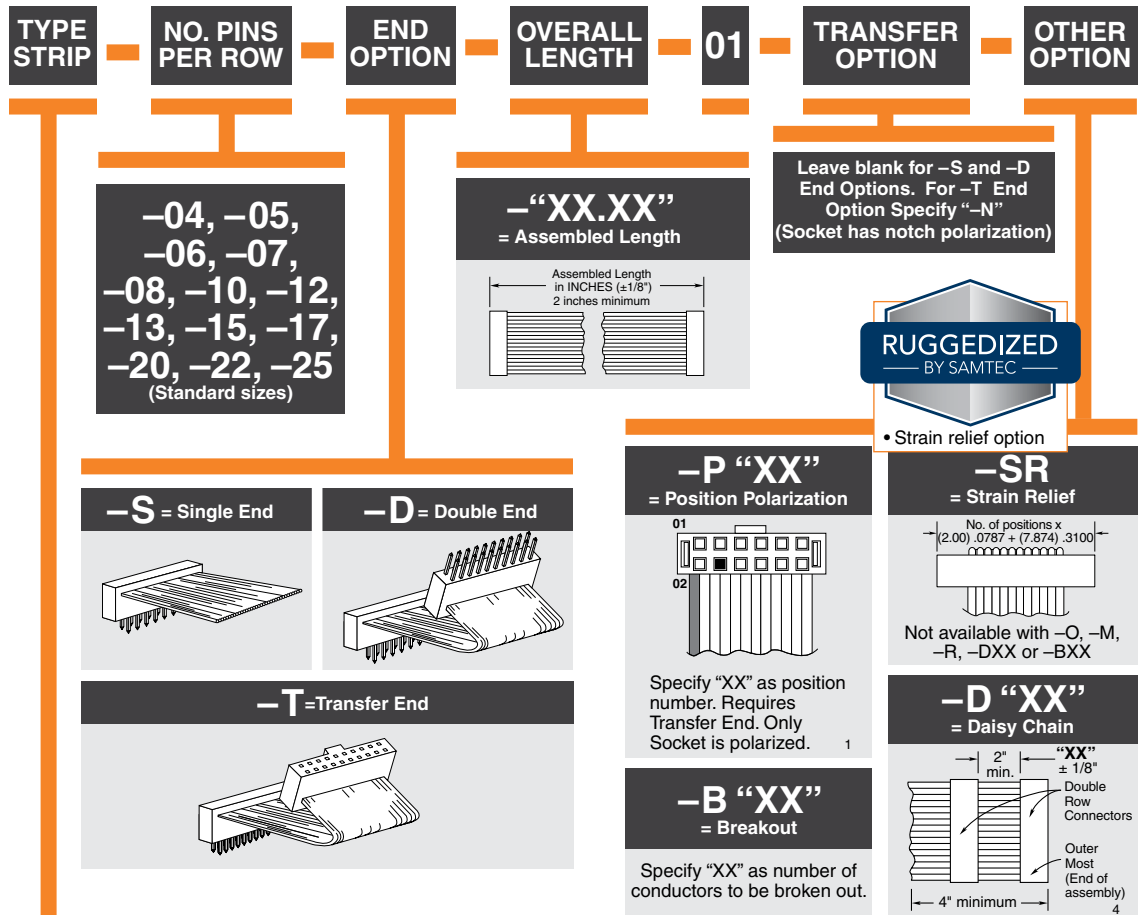

\*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.)  
When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.