

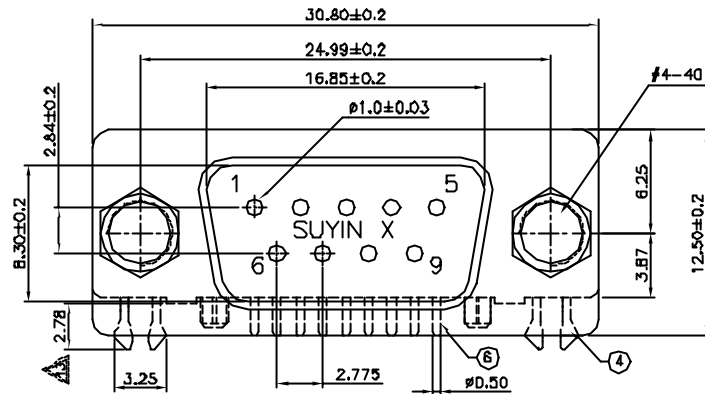


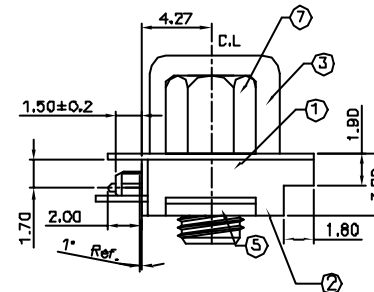


NOTE:  
070456FR009GX11BU

1. Selective plating  
'G1,-05u" Min. gold in contact area/  
'G2,-Gold flash in contact area/  
'G3,-10u" Min. gold in contact area/  
'G4,-15u" Min. gold in contact area/  
'G5,-30u" Min. gold in contact area/  
'G6,-50u" Min. gold in contact area/

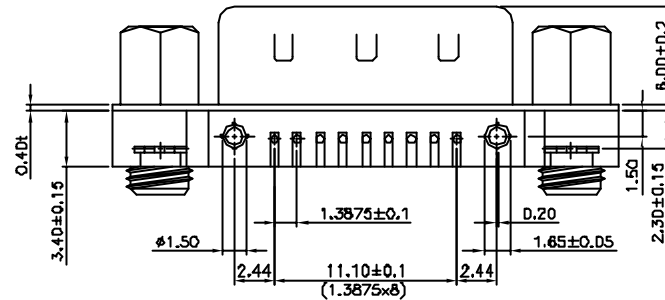

Recommended P.C.B Layout (P.C.B THICKNESS:1.6t)

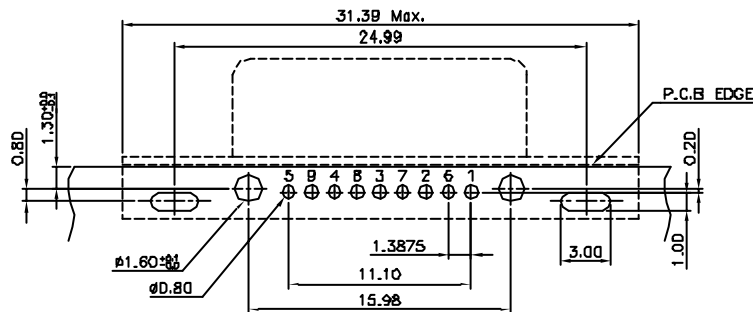

| 7   | Screw       | Brass                         | —     | Nickel Plated |
|-----|-------------|-------------------------------|-------|---------------|
| 6   | Terminal    | Brass                         | —     | Gold Plated   |
| 5   | Rivet       | Brass                         | —     | Nickel Plated |
| 4   | Fork        | Brass                         | —     | Tin Plated    |
| 3   | Shell       | SPCC                          | —     | Nickel Plated |
| 2   | Cover       | High temp plastic Green(322C) | —     | UL 94V-0      |
| 1   | Housing     | High temp plastic Brown(322C) | —     | UL 94V-0      |
| NO. | DESCRIPTION | MATERIAL                      | COLOR | REMARK        |

**SUYIN**  
CONNECTOR

|                |                                           |
|----------------|-------------------------------------------|
| CUSTOMER COPY  | TITLE:9 Pin D-SUB Connector Male R/A Type |
| PART NO.       | 070456MR009GX11BU                         |
| PART NO. (OLD) |                                           |
| DRAWING NO.    | 070456MR009GX11BU                         |
| SCALE          | 4:1                                       |
| UNIT           | mm                                        |
| A4             |                                           |

| ECN (DCN) NO. | REV | DATE | DESCRIPTION | CHANGE | APPRO. | GENERAL TOLERANCE UNLESS OTHERWISE NOTED |
|---------------|-----|------|-------------|--------|--------|------------------------------------------|
|               | 0   |      | NEW         |        |        |                                          |

| Angle   | ±2°   | DRAW   |
|---------|-------|--------|
| 30 ~    | ±0.50 | DESIGN |
| 10 ~ 30 | ±0.30 | CHECK  |
| ~ 10    | ±0.15 | APPRO. |