ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

RLT635-180MGE



- **Red Laser Diode**
- **635 nm, 180 mW**
- **Single transverse mode**
- **TO18 package, Flat Window**

RoHS COMPLIANT Pb Pb-Free

Description

RLT635-180MGE is a red laser diode, typically emitting at 635 nm. It features single transverse mode emission and an operating temperature of up to 50°C. It is an efficient radiation source for many applications like laser projection, holography, metrology, or use in the biomedical field. **RLT635-180MGE** comes in 5.6 mm TO-Can package **without PD.**

Maximum Rating* (T_{CASE} = 25°C)

Parameter	Symbol	Values Min.	Values Max.	Unit
Reverse Voltage	V_R		2	V
Operating Temperature*	T_{OPR}	0	+ 50	°C
Storage Temperature*	T_{STG}	- 40	+ 85	°C
Soldering Temperature (max. 3s)	T_{SOL}		+ 260	°C

* operating close to or outside these conditions may damage the device

Electro-Optical Characteristics (T_{CASE} = 25°C)


Parameter		Symbol	Values Min.	Values Typ.	Values Max.	Unit
Peak Wavelength		λ_P	**630**	**638**	**645**	**nm**
Optical Output Power		P_O		**180**		mW
Operating Voltage		V_F		2.8	3.2	V
Threshold Current		I_{th}		70	100	mA
Operating Current		I_F		220	240	mA
Slope Efficiency		η		1.1		W/A
Beam Divergence (FWHM)	parallel	$\Theta_{\parallel}$	4	10	13	deg.
	perpendicular	$\Theta_{\perp}$	10	15	24	deg.




Electrical Connection

Pin Configuration

Pin #	Function
Pin 1	LD Anode
Pin 2	LD Cathode




Bottom View





ROITHNER LASERTECHNIK GmbH
WIEDNER HAUPTSTRASSE 76 1040 VIENNA AUSTRIA
TEL. +43 1 586 52 43 -0, FAX. -44 OFFICE@ROITHNER-LASER.COM

Outline Dimensions

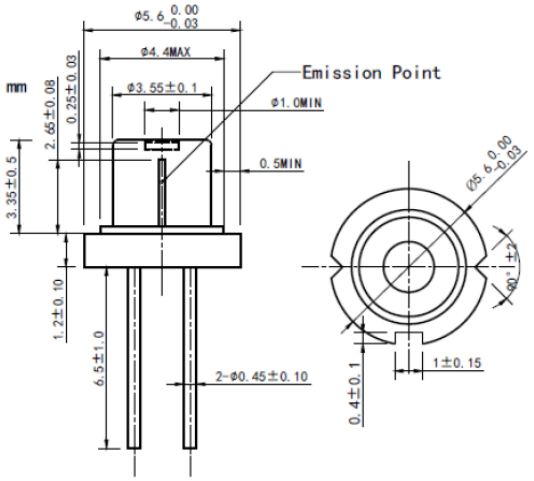

All dimensions in mm

Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard



ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating Considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory.** Laser diodes may be damaged by excessive drive currents or switching transients

It is advised, to operate the laser diode at the lowest temperature possible, and to never exceed maximum specifications as outlined in the datasheet. Device degradation will accelerate with increased temperature. **Proper heat sinking will greatly enhance stability and life time of the laser diode**

© All Rights Reserved
The above specifications are for reference purpose only and subjected to change without prior notice.