

**PIN HEADERS**

- Industry compatible
- Competitively priced
- Various plated contacts available
- 2.54mm pitch

**SINGLE ROW RIGHT ANGLE**




SECTION 8

**SPECIFICATION**


**Material & Finish**

<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	2 Amp
<b>Contact Resistance:</b>	30M $\Omega$ Max
<b>Insulator Resistance:</b>	3000M $\Omega$ Min
<b>Dielectric Withstanding</b>	
<b>Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

**OUTLINE DRAWING**

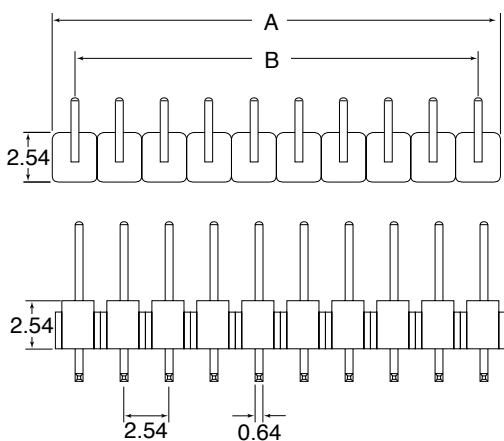

$A = 2.54 \times N^{\circ}$  of Positions  
 $B = (2.54 \times N^{\circ}$  of Positions)-1



For other dimension variations please consult office

**ORDERING INFORMATION**

DBC	PH	C16	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T= Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below

\*Dubilier will allocate a special code to distinguish pin lengths if required