



# OUTPUT VOLTAGE / CURRENT RATINGS CHART


## TRIPLE OUTPUT

MODEL NO.	MAIN VO1 ★@#			MAIN VO2 @★			MAIN VO3 @★		
	Typ.	Volt.	Max.	Typ.	Volt.	Max.	Typ.	Volt.	Max.
<b>HSU300-T050H</b> (HSU300-32)	36.0A	<b>5.0V</b>	40A	6.0A	<b>12.0V</b>	12A	6.0A	<b>12.0V</b>	12A
<b>HSU300-T050KK</b>	36.0A	<b>5.0V</b>	40A	5.0A	<b>15.0V</b>	10A	5.0A	<b>15.0V</b>	10A
<b>HSU300-T050MI</b>	36.0A	<b>5.0V</b>	40A	3.0A	<b>24.0V</b>	6A	6.0A	<b>12.0V</b>	12A
<b>HSU300-T033H</b>	50.0A	<b>3.3V</b>	55A	6.0A	<b>12.0V</b>	12A	6.0A	<b>12.0V</b>	12A
<b>HSU300-T033EI</b>	50.0A	<b>3.3V</b>	55A	15.0A	<b>5.0V</b>	--	6.0A	<b>12.0V</b>	12A
<b>HSU300-T050DI</b>	36.0A	<b>5.0V</b>	40A	18.0A	<b>3.3V</b>	--	6.0A	<b>12.0V</b>	12A

Symbol: "★" OVP built-in. "@" Adjustable. "#" Remote sensing.

## MECHANICAL DIMENSIONS: MM [INCHES]

**WEIGHT: 2.75kg (6.06 lb.)**

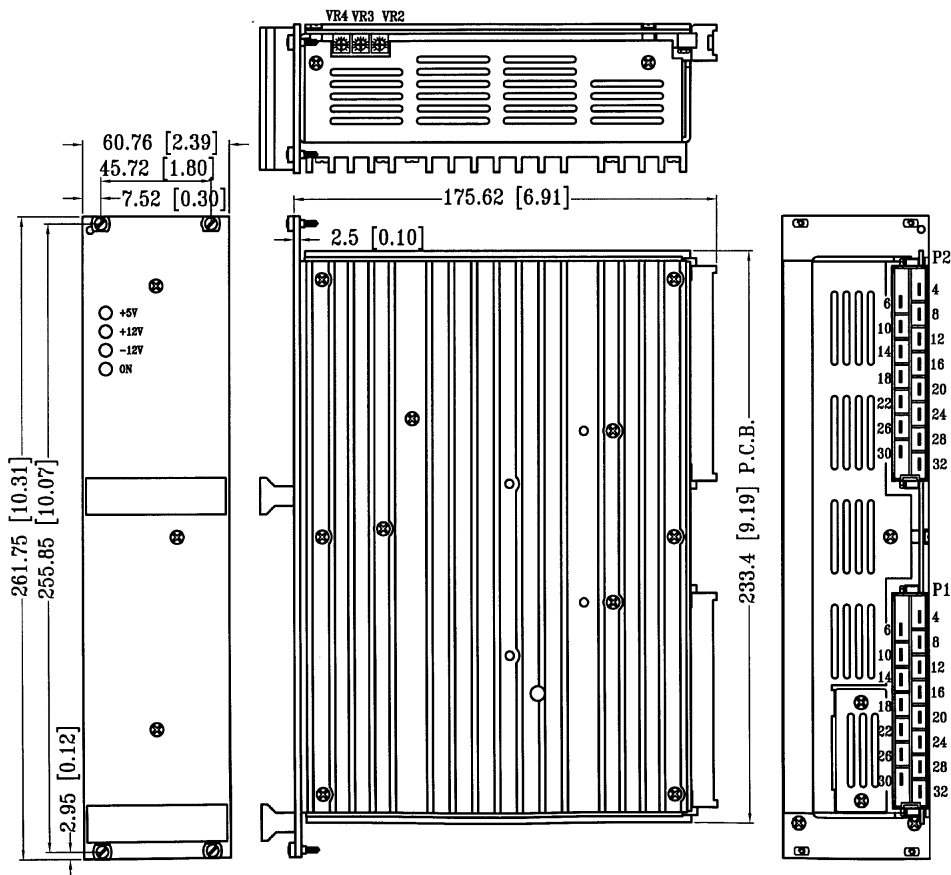

## INPUT & OUTPUT CONNECTORS PIN ASSIGNMENTS

ASSIGNMENT	AC INPUT			TRIPLE OUTPUT					ASSORTED SIGNAL			
	AC-L	AC-N	AC-G	+VO1	+VO2	-VO3	DC COM	NC	S(+)	S(-)	SYS Reset	AC Fail
CNTR & PIN#	P1-28	P1-30	P1-32	P2-4,6,8,10,12	P2-28,30	P2-16	P2-18,20,22,24,26	P1-8,10,12,24,16,18,20,22,24,26	P2-14	P2-32	P1-6	P1-4

Mating connector: DIN41612-H15 Female