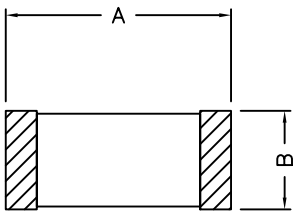
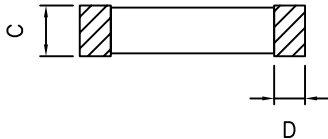


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

XFMRs P/N : XFEB321611-102-1A	Rev: A/1
-------------------------------	----------

<p>DIMENSION : (m/m)</p>  	A	3.2±0.2	m/m
	B	1.6±0.2	m/m
	C	1.1±0.2	m/m
	D	0.4~1.0	m/m
	E		m/m
	F		m/m
	G		m/m
	H		m/m
	I		m/m
	J		m/m
	K		m/m
	L		m/m
	M		m/m
	N		m/m
O		m/m	

ELECTRICAL REQUIREMENTS	TEST INSTRUMENTS
-------------------------	------------------

Z	1000±25% Ohms	TEST FREQ.	100MHz 500mV	<ul style="list-style-type: none"> ● HP 34401A MULTIMETER ○ HP 4195 NETWORKS/SPECTRUM ANALYZER ○ HP 42841 BIAS CURRENT SOURCE ○ HP 4285A LCR METER ○ HP 4286A RF LCR METER ● HP 4291A RF IMPEDANCE / MATERIAL ANALYZER ○ HP 4338A MILLION OHM METER ○ HP 6632A DC POWER SUPPLY ○ HP4284A PRECISION LCR METER
Rdc	0.30 Ohms Max	TEST FREQ.	MHz	
Idc	1000mA MAX	TEST FREQ.	MHz	

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C
6. Storage Temperature Range: -10°C to +40°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

<p>DRAWN BY :</p> <p style="text-align: center;">Feng Nov-02-10</p>	<p>CHECKED BY :</p> <p style="text-align: center;">YK Liao Nov-02-10</p>	<p>APPROVED BY :</p> <p style="text-align: center;">BW Nov-02-10</p>
---	--	--


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

Page 2 OF 2

XFMRS P/N : XFEB321611-102-1A

Rev: A/1

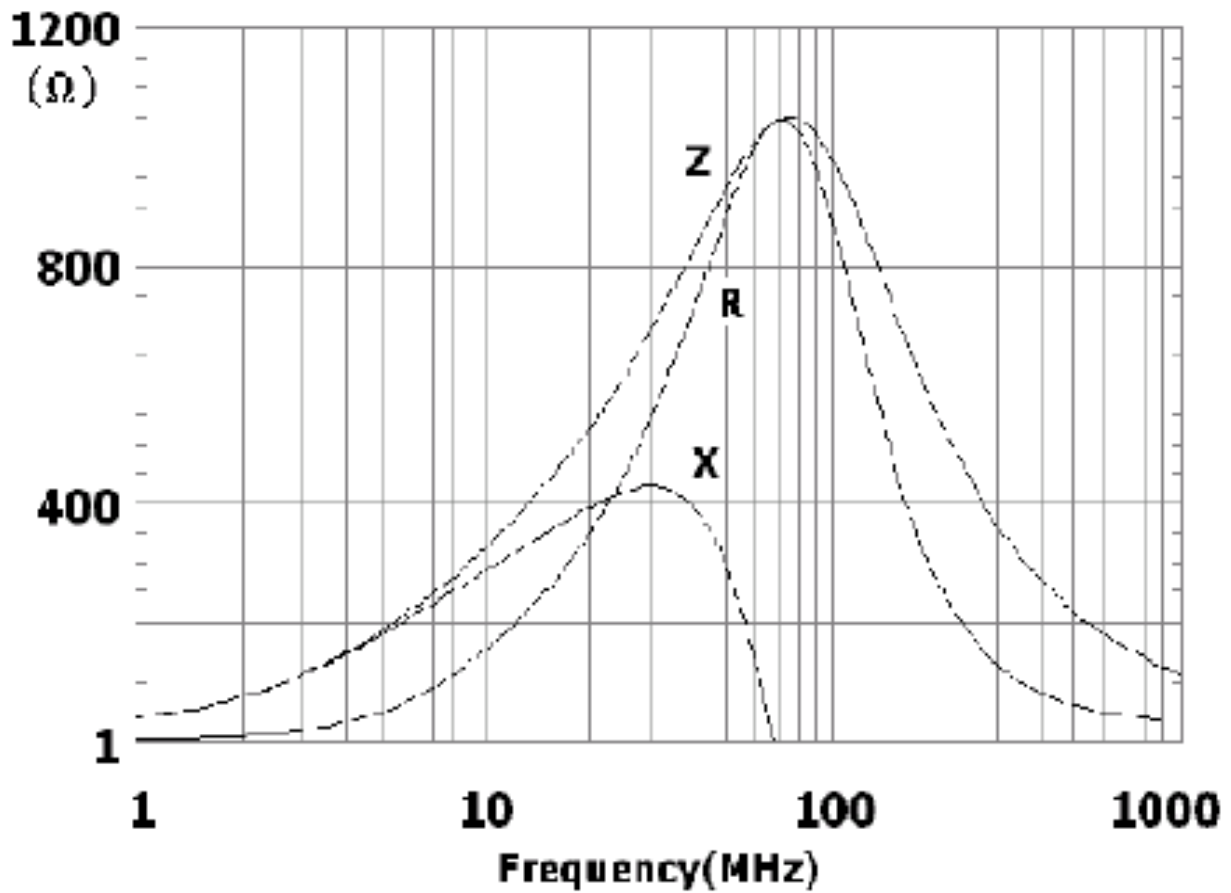

DRAWN BY :

Feng
Nov-02-10

CHECKED BY :

YK Liao
Nov-02-10

APPROVED BY :

BW
Nov-02-10