

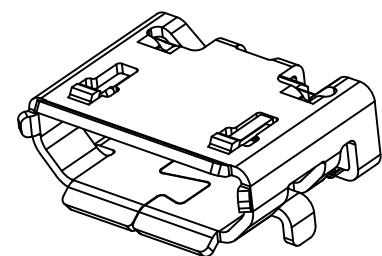


PART NUMBER
10118193-000XLF

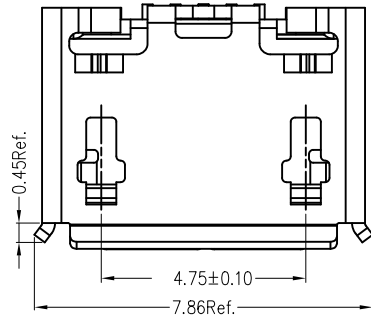





With Flange Style



Without Flange Style $\triangle D$



- NOTES:
1. MATERIAL:
HOUSING: HIGH THERMOPLASTIC RESIN, UL94V-0, COLOR: BLACK
TERMINAL: COPPER ALLOY
SHELL: STAINLESS
 2. FINISH:
CONTACT AREA: GOLD 30u" MIN. PLATED
CONTACT SOLDER AREA: GOLD 2u" MIN. PLATED
SHELL: MATTE TIN 80u" MIN. PLATED
UNDER NICKEL 50u" MIN. PLATED ALL OVER.
 3. PRODUCT SPECIFICATION: GS-12-641.
 4. PACKAGING SPECIFICATION: GS-14-2180.
 5. THE "LF" MEANS FOR LEAD FREE AND CAN WITHSTAND EXPOSE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN IR REFLOW PROCESS.
 6. PART NUMBER: 10118193-000 X LF

- 1- WHIT FLANGE
2- WITHOUT FLANGE $\triangle D$

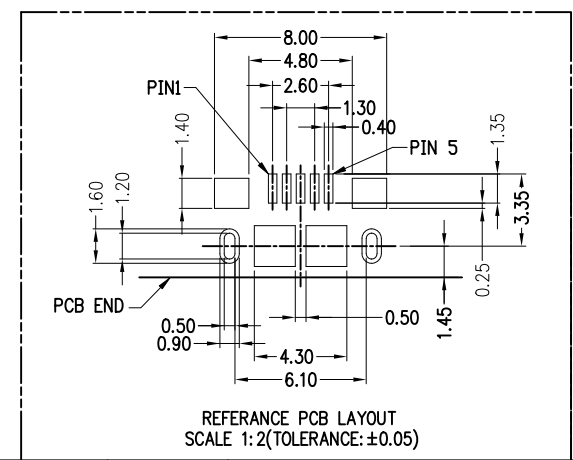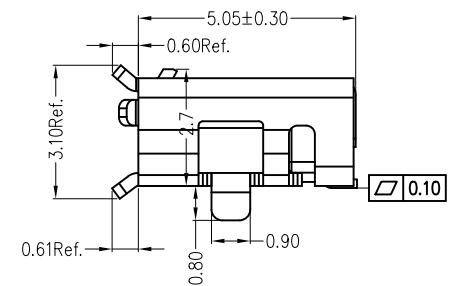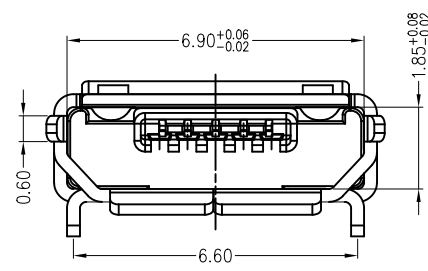

REFERENCE PCB LAYOUT
SCALE 1:2(TOLERANCE: ±0.05)

Item	Title	Q'TY
1	Shell	1
2	Terminal	5
3	InsertMolding	1

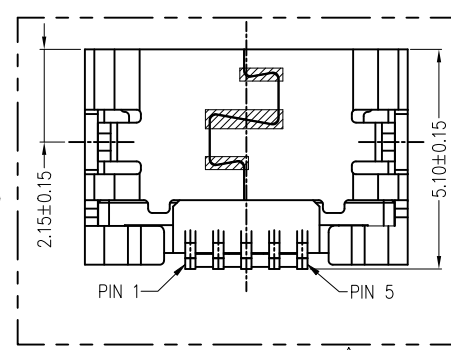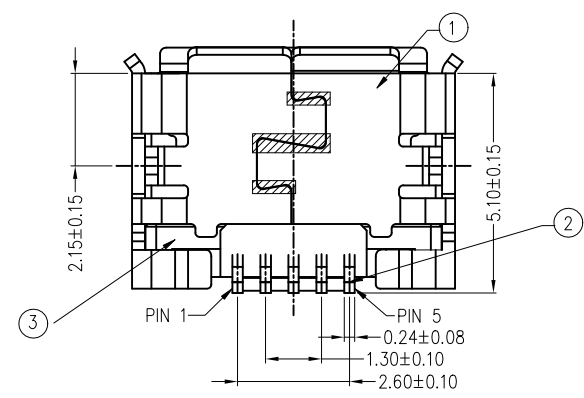

Without Flange Style $\triangle D$

mat'l. code				surface	tolerance	projection	product family	
				ISO 1302	ISO 406	ISO 1101	HPL 510 USB 2.0	
ltr	ec	no	dr	date	tolerances unless otherwise specified		title	
A	-	LS		10/21/11	angles	linear	MICRO USB B TYPE	
B	ELX-N-18099	JH		10/21/13			RECEPTACLE	
C	ELX-N-20945	Nick		5/22/15	0°±2'		scale 1:1	
D	ELX-N-29923	LZ		01/19/18	dr	Laurence.Zang	10/17/17	dwg no
					eng	Laurence.Zang	10/17/17	sheet 1 of 1
					chr	LQ_Lei	10/17/17	size
					app	Tim_Yao	10/17/17	A3
sheet index		revision sheet				Amphenol FCI		type
								Product Customer Drawing