SKiM 220GD176D



SKiM® 4

IGBT Modules

SKiM 220GD176D


Target Data

Features

- Homogenous Si
- Trench = Trenchgate Technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to 6x I_C

Typical Applications

- AC inverter drives mains 575 - 750 V AC
- public transport (auxiliary syst.)



GD

Absolute Maximum Ratings		T_c = 25 °C, unless otherwise specified	
Symbol	**Conditions**	**Values**	**Units**
IGBT			
V_{CES}		1700	V
I_C	T_s = 25 (70) °C	220 (150)	A
I_{CRM}	t_p = 1 ms	440	A
V_{GES}		± 20	V
T_j (T_{stg})		- 40 ...+ 150 (125)	°C
T_{cop}	max. case operating temperature	125	°C
V_{isol}	AC, 1 min.	3300	V
Inverse diode			
I_F	T_s = 25 (70) °C	220 (165)	A
I_{FRM}	t_p = 1 ms	440	A
I_{FSM}	t_p = 10 ms; sin.; T_j = 150 °C	2200	A

Characteristics		T_c = 25 °C, unless otherwise specified			
Symbol	**Conditions**	**min.**	**typ.**	**max.**	**Units**
IGBT					
$V_{GE(th)}$	V_{GE} = V_{CE}; I_C = 10 mA	5,15	5,8	6,45	V
I_{CES}	V_{GE} = 0; V_{CE} = V_{CES}; T_j = 25 °C		0,1	0,3	mA
V_{CEO}	T_j = 25 (125) °C		1 (0,9)	1,2 (1,1)	V
r_{CE}	T_j = 25 (125) °C		4 (6)	5 (7,2)	mΩ
V_{CEsat}	I_{Cnom} = 250 A; V_{GE} = 15 V, T_j = 25 (125) °C on chip level		2 (2,4)	2,45 (2,9)	V
C_{ies}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		22		nF
C_{oes}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		0,9		nF
C_{res}	V_{GE} = 0; V_{CE} = 25 V; f = 1 MHz		0,7		nF
L_{CE}				15	nH
$R_{CC'+EE'}$	resistance, terminal-chip T_c= 25 (125) °C		1,35 (1,75)		mΩ
$t_{d(on)}$	V_{CC} = 1200 V				ns
t_r	I_{Cnom} = 250 A				ns
$t_{d(off)}$	R_{Gon} = R_{Goff} = Ω				ns
t_f	T_j = 125 °C				ns
E_{on} (E_{off})	V_{GE} ± 15 V		150 (100)		mJ
E_{on} (E_{off})	with SKHI 6; T_j = °C V_{CC} = V; I_C = A				mJ
Inverse diode					
V_F = V_{EC}	I_{Fnom} = 200 A; V_{GE} = 15 V; T_j = 25 (125) °C		1,7 (1,8)	1,9 (2)	V
V_{TO}	T_j = 25 (125) °C		1,1 (0,9)	1,3 (1,1)	V
r_T	T_j = 25 (125) °C		3 (4,5)	3 (4,5)	mΩ
I_{RRM}	I_F = 200 A; T_j = 125 °C				A
Q_{rr}	V_{GE} = V di/dt = A/µs				µC
E_{rr}	R_{Gon} = R_{Goff} =				mJ
Thermal characteristics					
$R_{th(j-s)}$	per IGBT			0,21	K/W
$R_{th(j-s)}$	per FWD			0,26	K/W
Temperature Sensor					
R_{TS}	T = 25 (100) °C		1 (1,67)		kΩ
tolerance	T = 25 (100) °C		3 (2)		%
Mechanical data					
M_1	to heatsink (M5)	2		3	Nm
M_2	for terminals (M6)	4		5	Nm
w				310	g

© by SEMIKRON

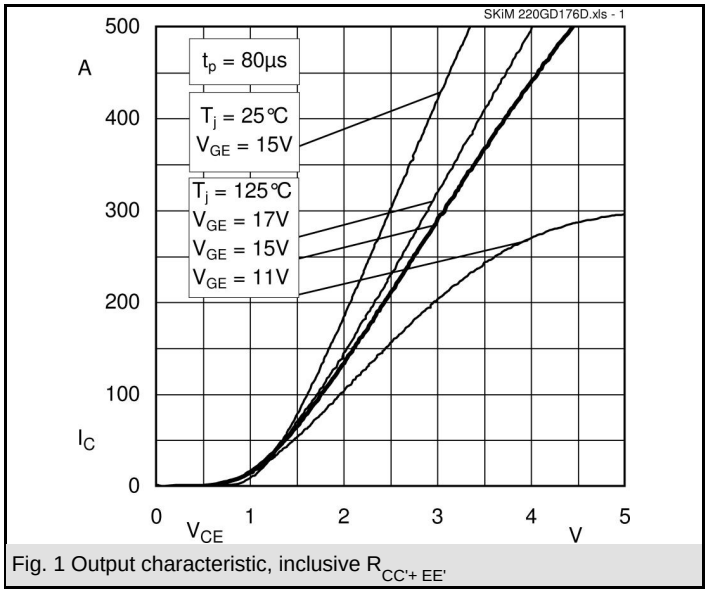


Fig. 1 Output characteristic, inclusive $R_{CC'+EE'}$

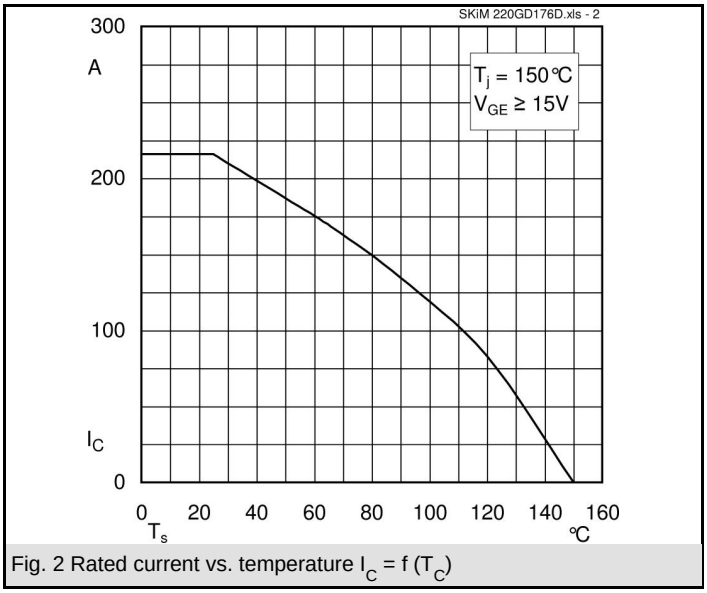


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

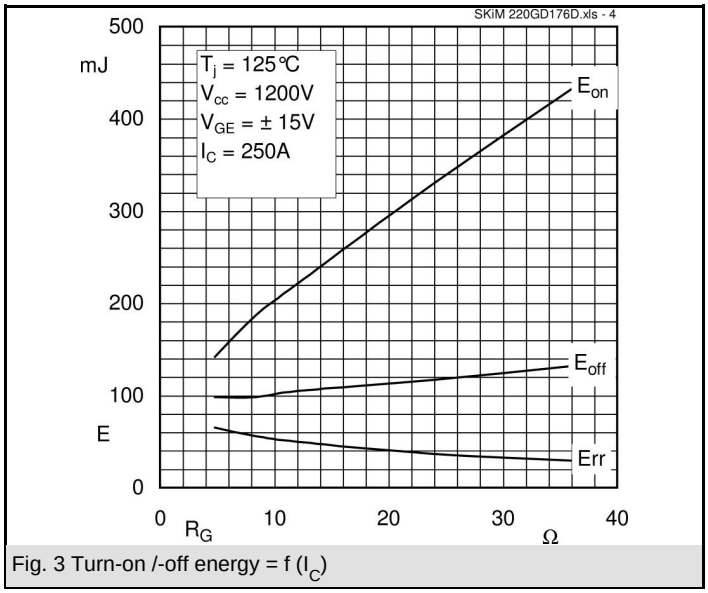


Fig. 3 Turn-on /-off energy = f (I_C)

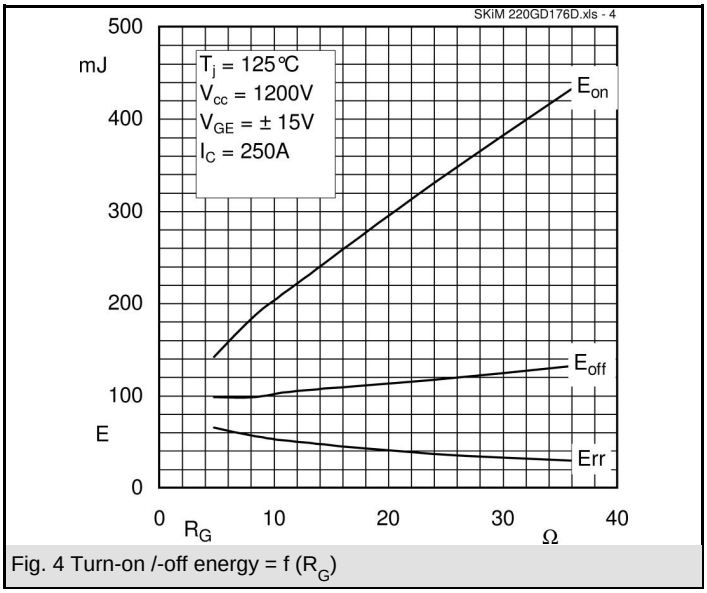


Fig. 4 Turn-on /-off energy = f (R_G)

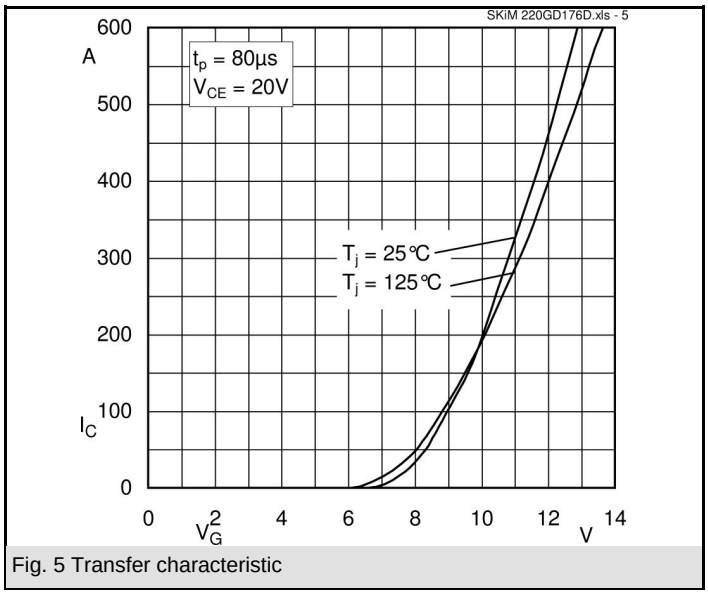


Fig. 5 Transfer characteristic

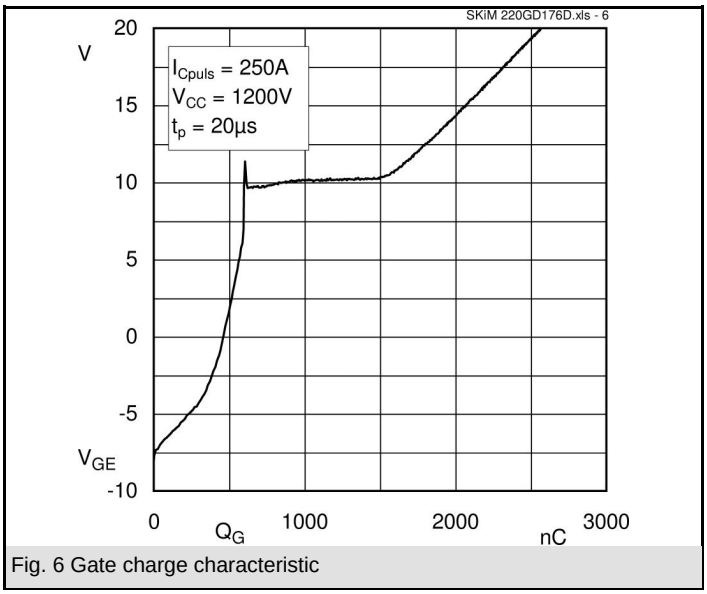


Fig. 6 Gate charge characteristic

 © by SEMIKRON

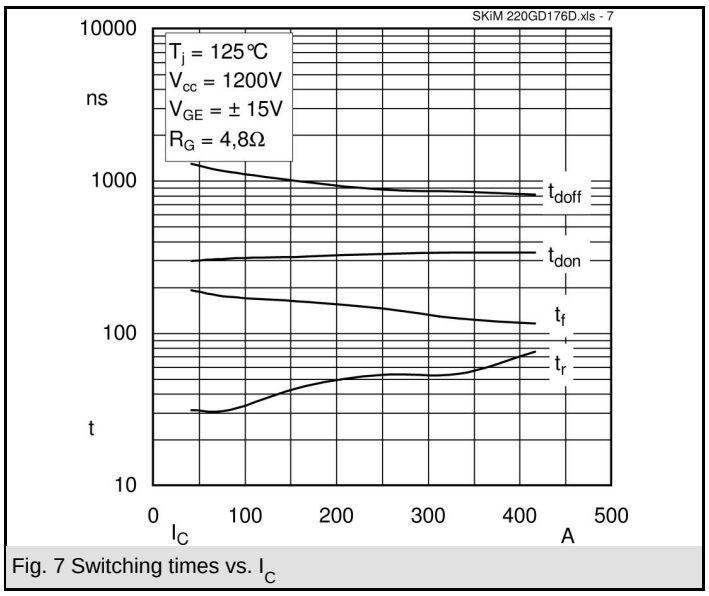


Fig. 7 Switching times vs. I_C

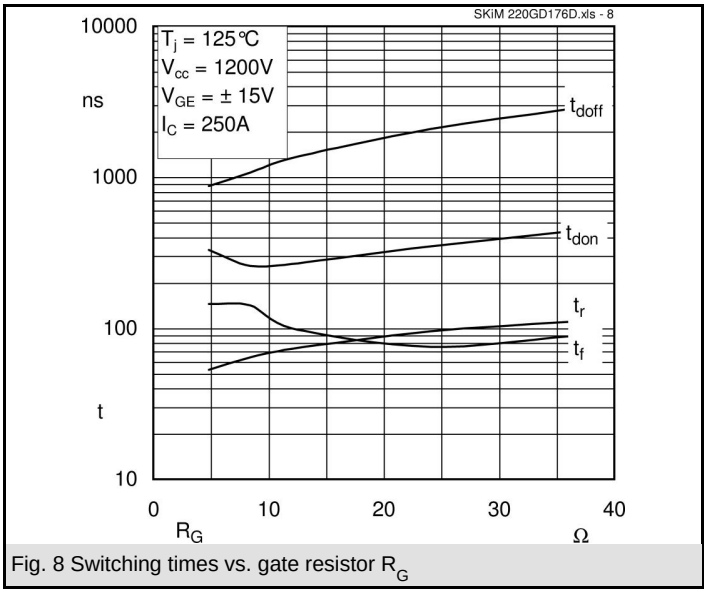


Fig. 8 Switching times vs. gate resistor R_G

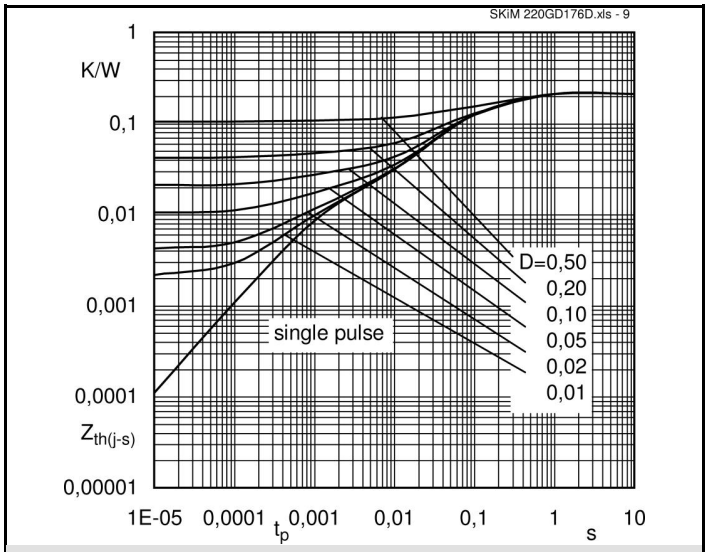


Fig. 9 Transient thermal impedance of

IGBT Z_{thJC} = f (t_p); D = t_p/t_c = t_p * f

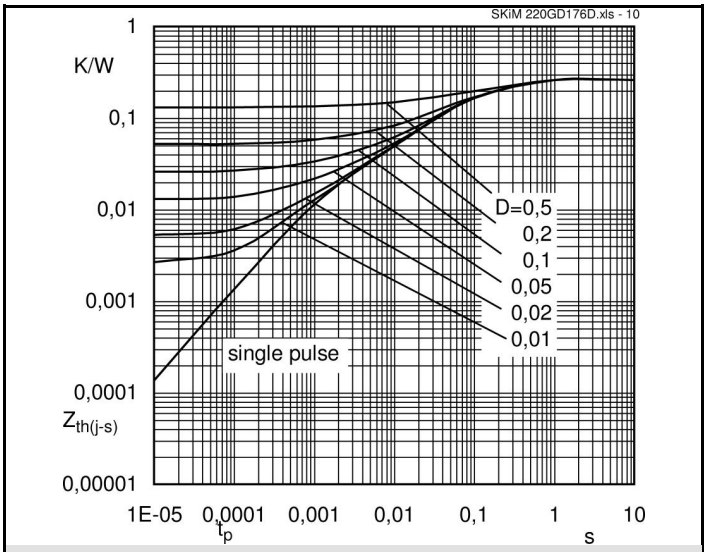


Fig. 10 Transient thermal impedance of inverse diodes

IGBT Z_{thJC} = f (t_p); D = t_p/t_c = t_p * f



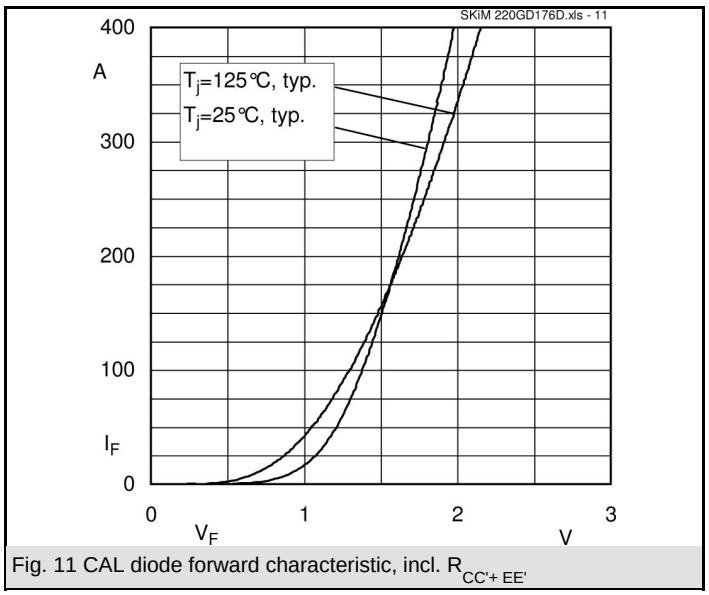


Fig. 11 CAL diode forward characteristic, incl. $R_{CC'+ EE'}$

 © by SEMIKRON

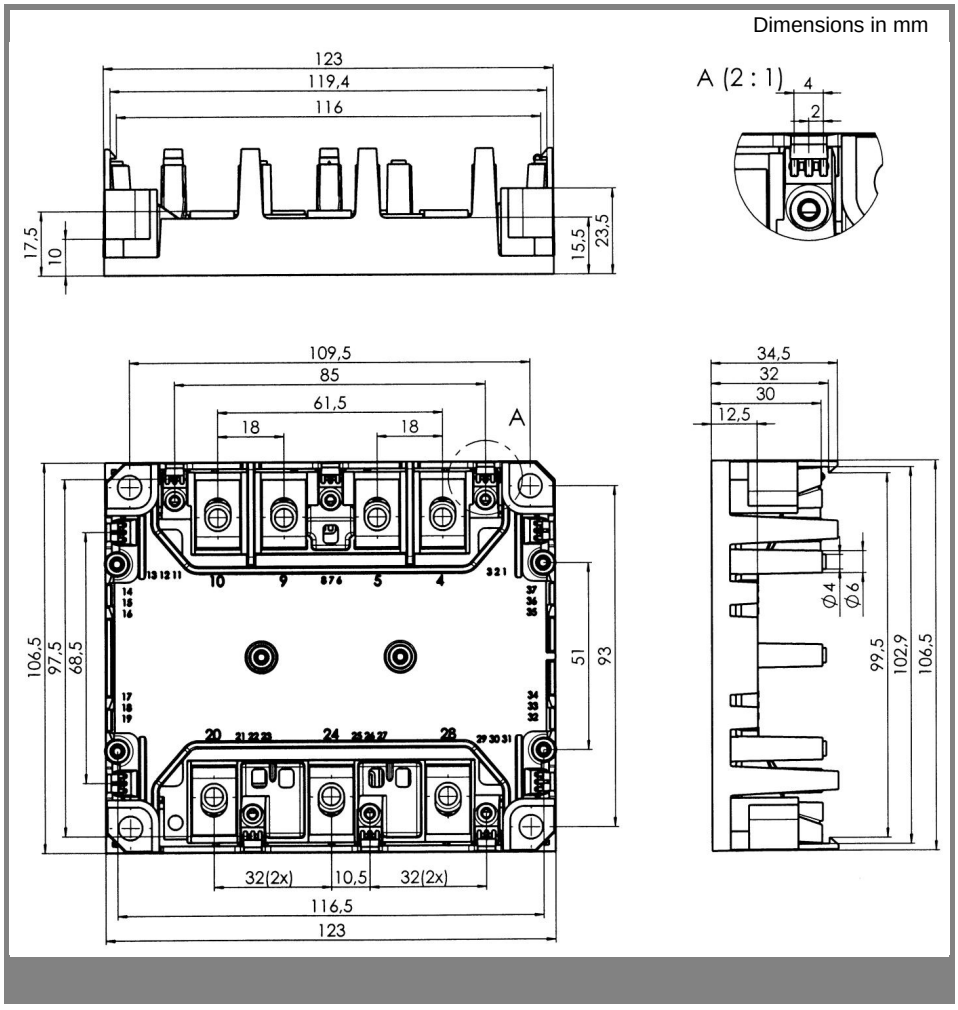

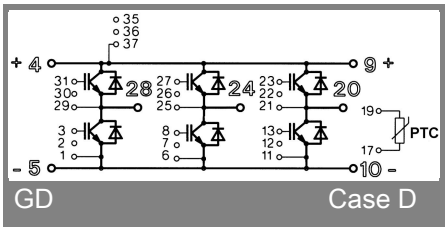

GD Case D

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

 © by SEMIKRON