



MX23L4100


4M-BIT MASK ROM (8/16 BIT OUTPUT)

FEATURES


- Bit organization
 - 512K x 8 (byte mode)
 - 256K x 16 (word mode)
- Fast access time
 - Random access: 100ns
- Current
 - Operating: 30mA
 - Standby: 20uA
- Supply voltage
 - 3.3V±10%
- Package
 - 40 pin SOP (500 mil)
 - 40 pin PDIP (600 mil)

PIN CONFIGURATION

40 SOP

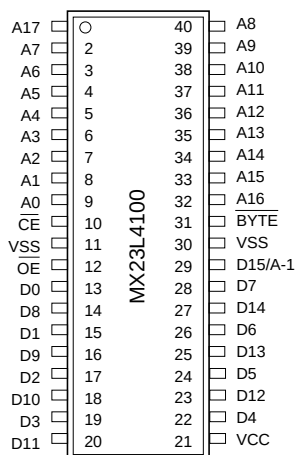

40 PDIP

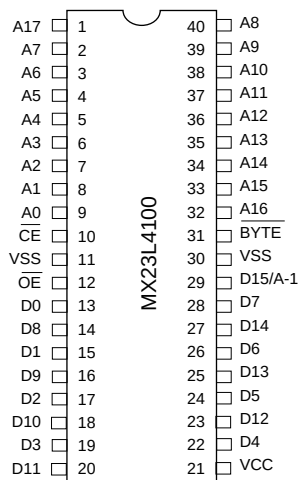

ORDER INFORMATION

Part No.	Access Time	Package
MX23L4100MC-10	100ns	40 pin SOP
MX23L4100MC-12	120ns	40 pin SOP
MX23L4100MC-15	150ns	40 pin SOP
MX23L4100PC-10	100ns	40 pin PDIP
MX23L4100PC-12	120ns	40 pin PDIP
MX23L4100PC-15	150ns	40 pin PDIP


PIN DESCRIPTION

Symbol	Pin Function
A0~A17	Address Inputs
D0~D14	Data Outputs
CE	Chip Enable Input
OE	Output Enable Input
Byte	Word/ Byte Mode Selection
VCC	Power Supply Pin
VSS	Ground Pin
NC	No Connection

MODE SELECTION

CE	OE	Byte	D15/A-1	D0~D7	D8~D15	Mode	Power
H	X	X	X	High Z	High Z	-	Stand-by
L	H	X	X	High Z	High Z	-	Active
L	L	H	Output	D0~D7	D8~D15	Word	Active
L	L	L	Input	D0~D7	High Z	Byte	Active

BLOCK DIAGRAM

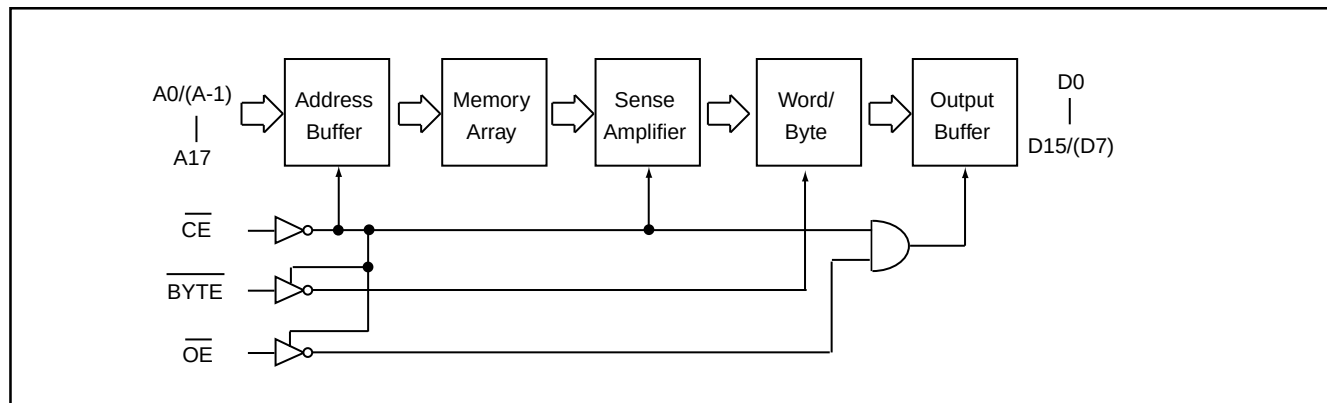

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Ratings
Voltage on any Pin Relative to VSS	VIN	-0.8V to VCC+2.0V (Note)
Ambient Operating Temperature	T _{opr}	0°C to 70°C
Storage Temperature	T _{stg}	-65°C to 125°C

Note: Minimum DC voltage on input or I/O pins is -0.5V. During voltage transitions, inputs may undershoot VSS to -0.8V for periods of up to 20ns. Maximum DC voltage on input or I/O pins is VCC+0.5V. During voltage transitions, input may overshoot VCC to VCC+2.0V for periods of up to 20ns.

DC CHARACTERISTICS (T_a = 0°C ~ 70°C, VCC = 3.3V±10%)

Item	Symbol	MIN.	MAX.	Conditions
Output High Voltage	V _{OH}	2.4V	-	I _{OH} = -0.4mA
Output Low Voltage	V _{OL}	-	0.4V	I _{OL} = 1.6mA
Input High Voltage	V _{IH}	2.2V	VCC+0.3V	
Input Low Voltage	V _{IL}	-0.3V	0.8V	
Input Leakage Current	I _{LI}	-	5uA	0V, VCC
Output Leakage Current	I _{LO}	-	5uA	0V, VCC
Operating Current (CE toggle)	ICC1	-	30mA	t _{RC} =100ns, all output open
Standby Current (TTL)	ISTB1	-	1mA	$\overline{\text{CE}}$ = V _{IH}
Standby Current (CMOS)	ISTB2	-	20uA	$\overline{\text{CE}}$ > VCC - 0.2V
Input Capacitance	C _{IN}	-	10pF	T _a = 25°C, f = 1MHZ
Output Capacitance	C _{OUT}	-	10pF	T _a = 25°C, f = 1MHZ


AC CHARACTERISTICS (Ta = 0°C ~ 70°C, VCC = 3.3V±10%)

Item	Symbol	23L4100-10		23L4100-12		23L4100-15	
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
Read Cycle Time	tRC	100ns	-	120ns	-	150ns	-
Address Access Time	tAA	-	100ns	-	120ns	-	150ns
Chip Enable Access Time	tACE	-	100ns	-	120ns	-	150ns
Output Enable Time	tOE	-	50ns	-	60ns	-	70ns
Output Hold After Address	tOH	-	0ns	-	0ns	-	0ns
Output High Z Delay	tHZ	-	20ns	-	20ns	-	20ns

Note: Output high-impedance delay (tHZ) is measured from OE or CE going high, and this parameter guaranteed by design over the full voltage and temperature operating range - not tested.

AC Test Conditions

Input Pulse Levels	0.4V~2.4V
Input Rise and Fall Times	10ns
Input Timing Level	1.4V
Output Timing Level	1.4V
Output Load	See Figure

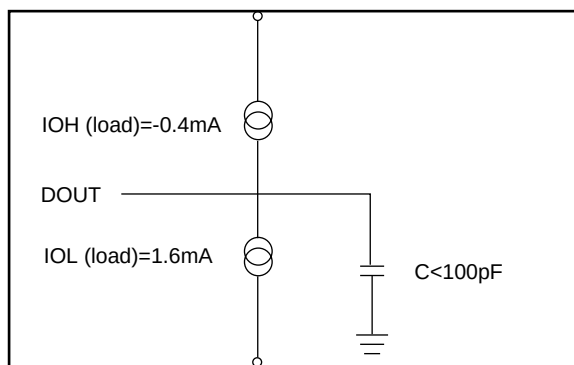


Note: No output loading is present in tester load board.

Active loading is used and under software programming control.

Output loading capacitance includes load board's and all stray capacitance.


TIMING DIAGRAM

ACCESS TIMING

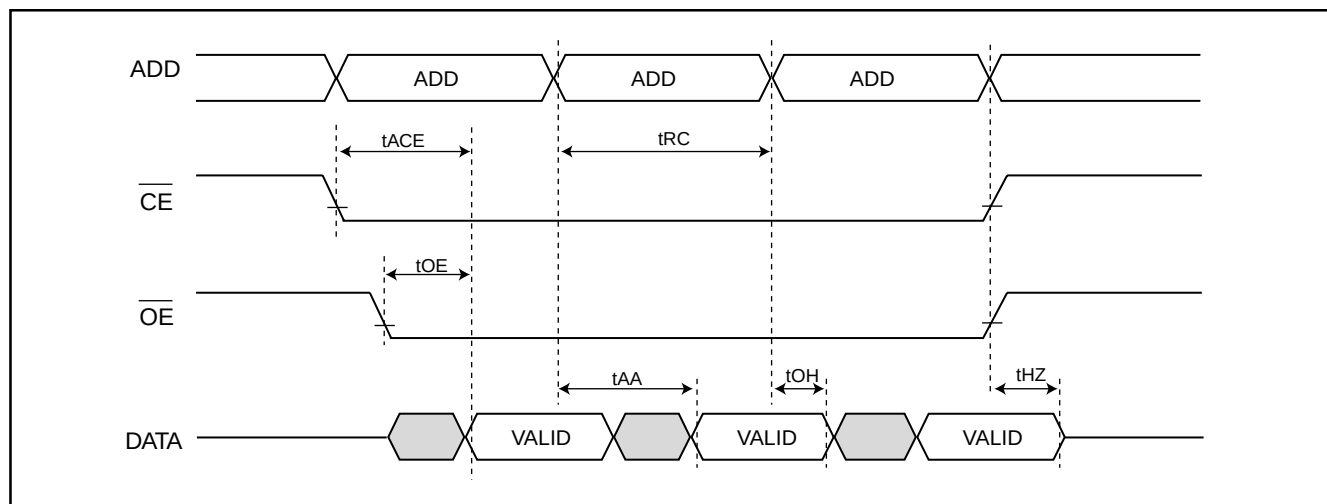


PACKAGE INFORMATION

40-PIN PLASTIC DIP (600 mil)

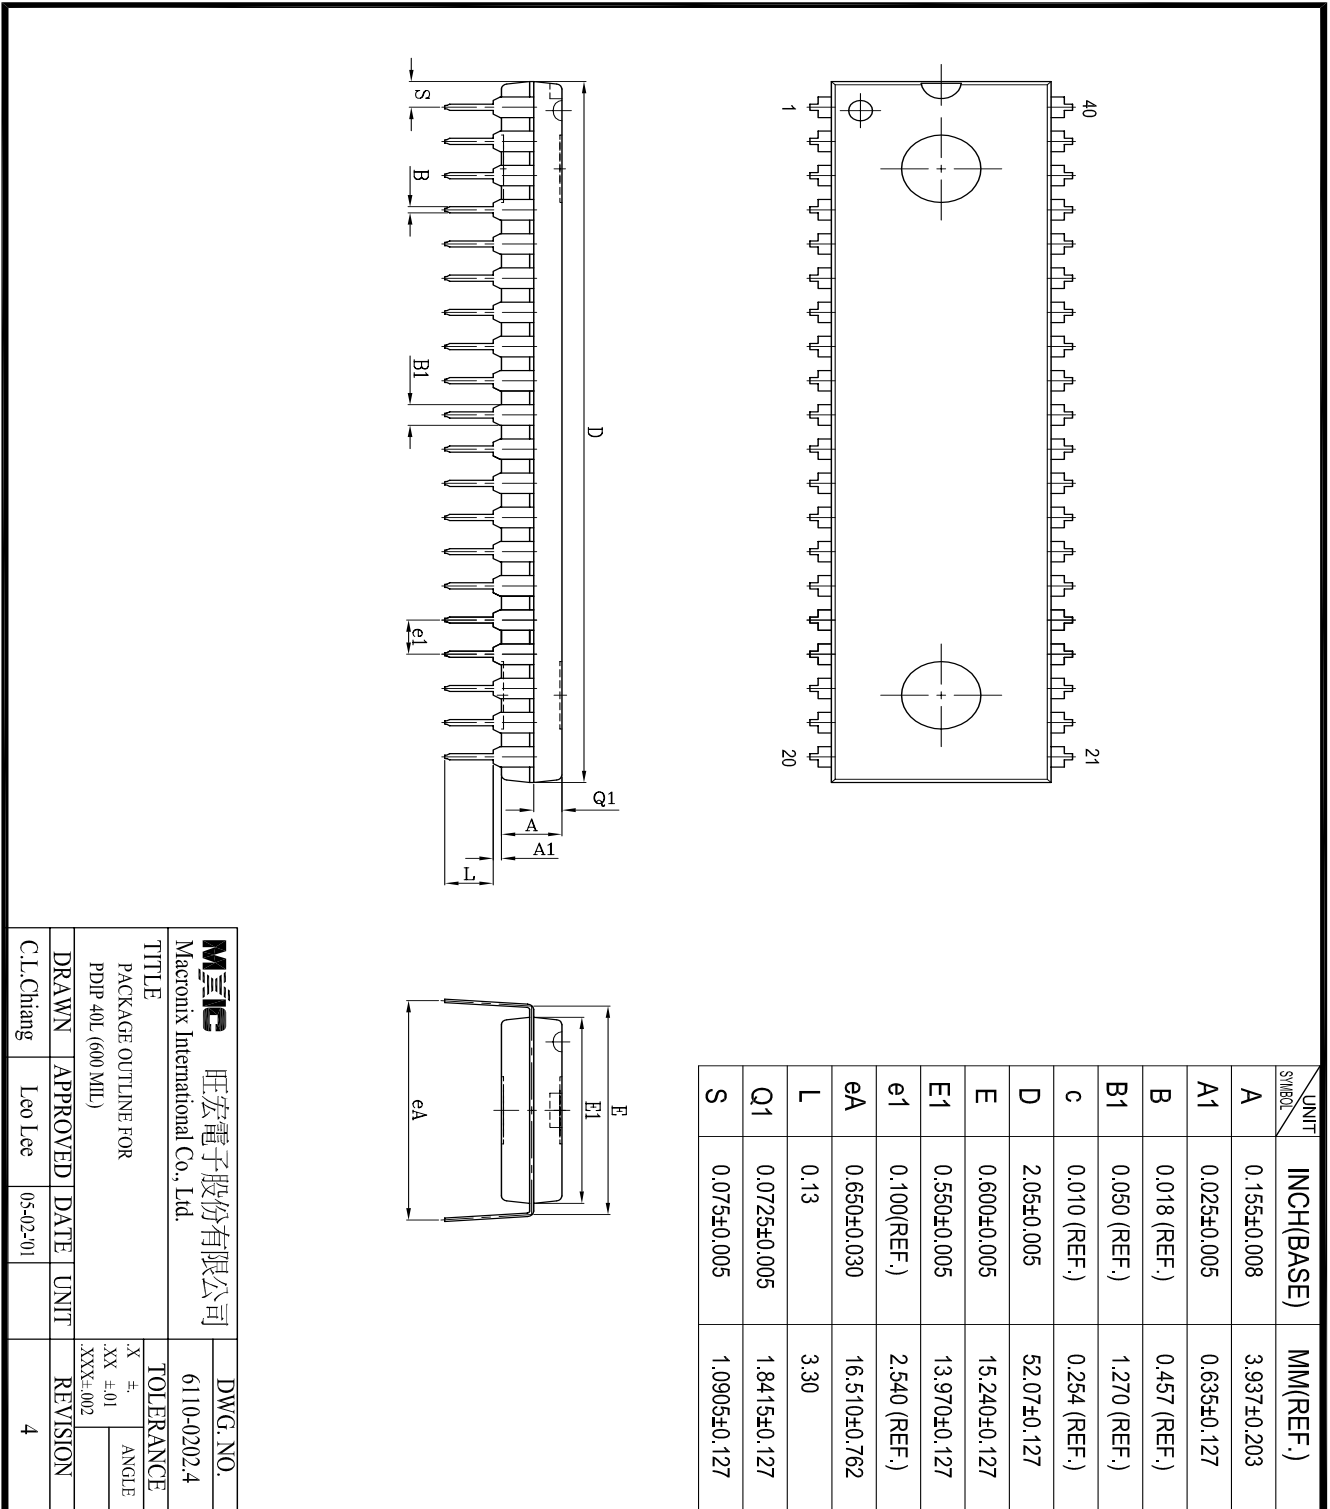

40-PIN PLASTIC SOP

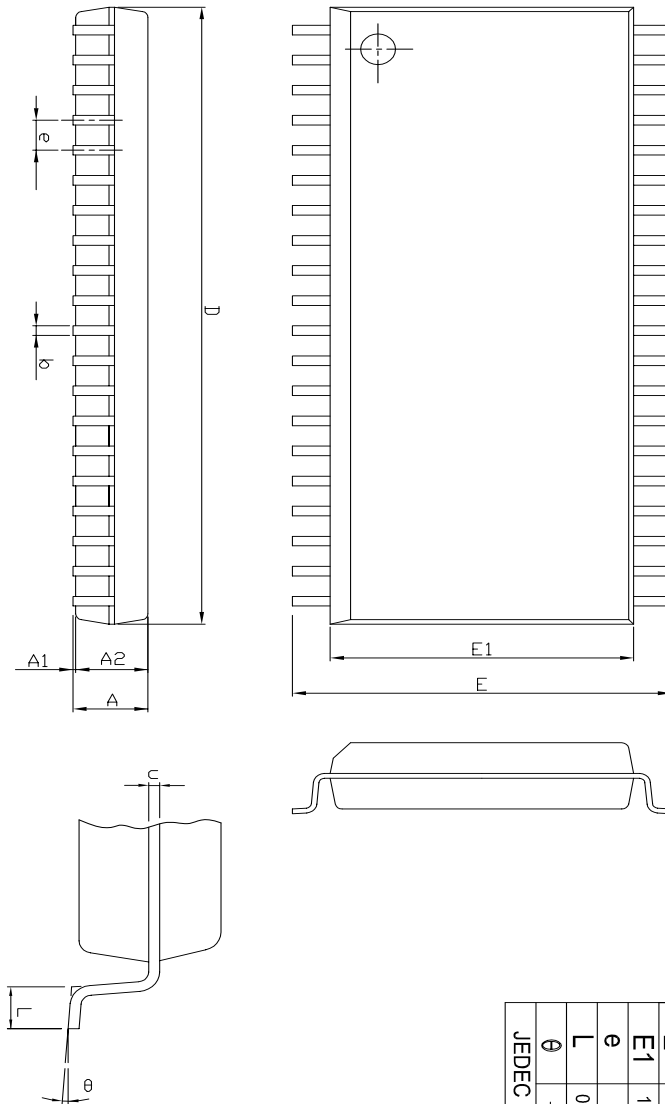

Symbol	Dimension in mm (Base)			Dimension in inch (Ref.)		
	Min	Nom	Max	Min	Nom	Max
A	—	—	3.00	—	—	0.118
A1	0.10	—	—	0.004	—	—
A2	2.57	2.69	2.82	0.101	0.106	0.111
b	0.41REF			0.016 REF		
c	0.20 REF			0.008 REF		
D	25.93	26.06	26.19	1.021	1.026	1.031
E	13.87	14.12	14.38	0.546	0.556	0.566
E1	11.18	11.30	11.43	0.440	0.445	0.450
e	1.27 REF			0.050 REF		
L	0.58	0.79	0.99	0.023	0.031	0.039
θ	—	5°	—	—	5°	—

JEDEC

Mxic 旺宏電子股份有限公司				DWG. NO.	
Macronix International Co., Ltd.				6110-0206.1	
TITLE				TOLERANCE	
PACKAGE OUTLINE FOR SOP 40L (450 MIL)				.X ±. .XX ±.01 .XXX-.002	
DRAWN				APPROVED	
C.L.Chang				Dennis Chang	
DATE				UNIT	
05-03-01				INCH	
REVISION				1	



REVISION HISTORY

REVISION	DESCRIPTION	PAGE	DATE
1.3	AC CHARACTERISTICS tOH 10ns-->0ns	P3	FEB/01/1999
1.4	Modify Package Information	P4~5	JUL/16/2001



MX23L4100

MACRONIX INTERNATIONAL Co., LTD.

HEADQUARTERS:

TEL: +886-3-578-6688

FAX: +886-3-563-2888

EUROPE OFFICE:

TEL: +32-2-456-8020

FAX: +32-2-456-8021

JAPAN OFFICE:

TEL: +81-44-246-9100

FAX: +81-44-246-9105

SINGAPORE OFFICE:

TEL: +65-348-8385

FAX: +65-348-8096

TAIPEI OFFICE:

TEL: +886-2-2509-3300

FAX: +886-2-2509-2200

MACRONIX AMERICA, INC.

TEL: +1-408-453-8088

FAX: +1-408-453-8488

CHICAGO OFFICE:

TEL: +1-847-963-1900

FAX: +1-847-963-1909

[http : //www.macronix.com](http://www.macronix.com)