

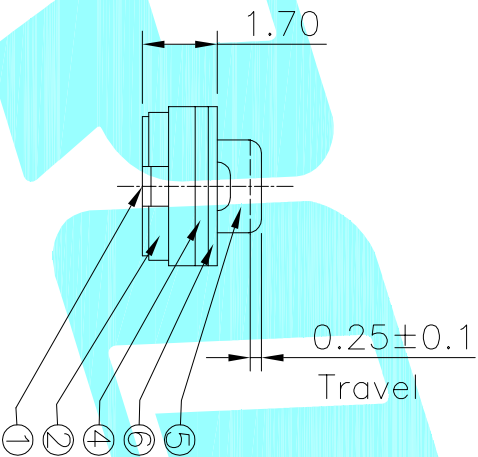


Circuit Diagram

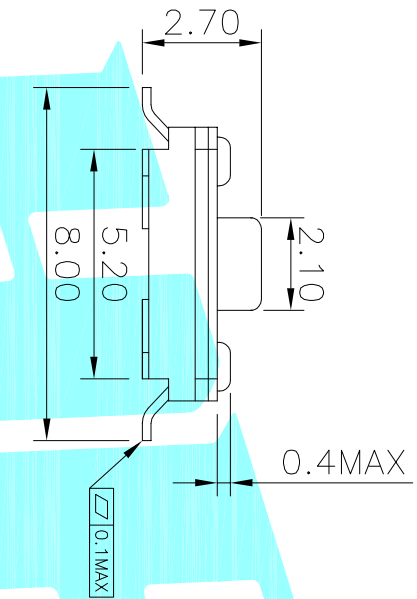


NO.1	
PART NO	vigor
3	180±30
4	250±30

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

- Typical Specifications
1. Rating : DC 12V 50mA
 2. Contact Resistance: $\leq 100m\Omega$
 3. Insulation Resistance: $\geq 100M\Omega$ DC250V
 4. Operating Temperature Range: $-25^{\circ}C$ +80 $^{\circ}C$
 5. Ambient Humidity Used: $\leq 85\%RH$
 6. Travel: 0.25±0.1mm
 7. Life : 100,000 Cycles
 8. IP Rating: IP65

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Cover	---	1	SUS	Tin Plated	---
⑤	Keystroke	---	1	RUBBE	Black	---
④	Waterproof Silicone	---	1	Silica gel	Black	---
③	Contact	---	1	FAg/SUS	Plating silver	---
②	Base	---	1	PA6T	Black	---
①	Terminal	---	2	Copper(0.2t)	Plating silver	---

DRAWN		J.X.Zhang	DATE		2014/6/13
CHECKED			TITLE:		TACT SWITCHS
APPROVALS			PART NO.		K2-1107SP-AQSW-□□
TOLERANCES ARE		30~0.1± 10~0.30 5~0.10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	SCALE: 1:1
			±2'	DRAWING NO.	PROJ:
					SHEET 1 OF 1



ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			