

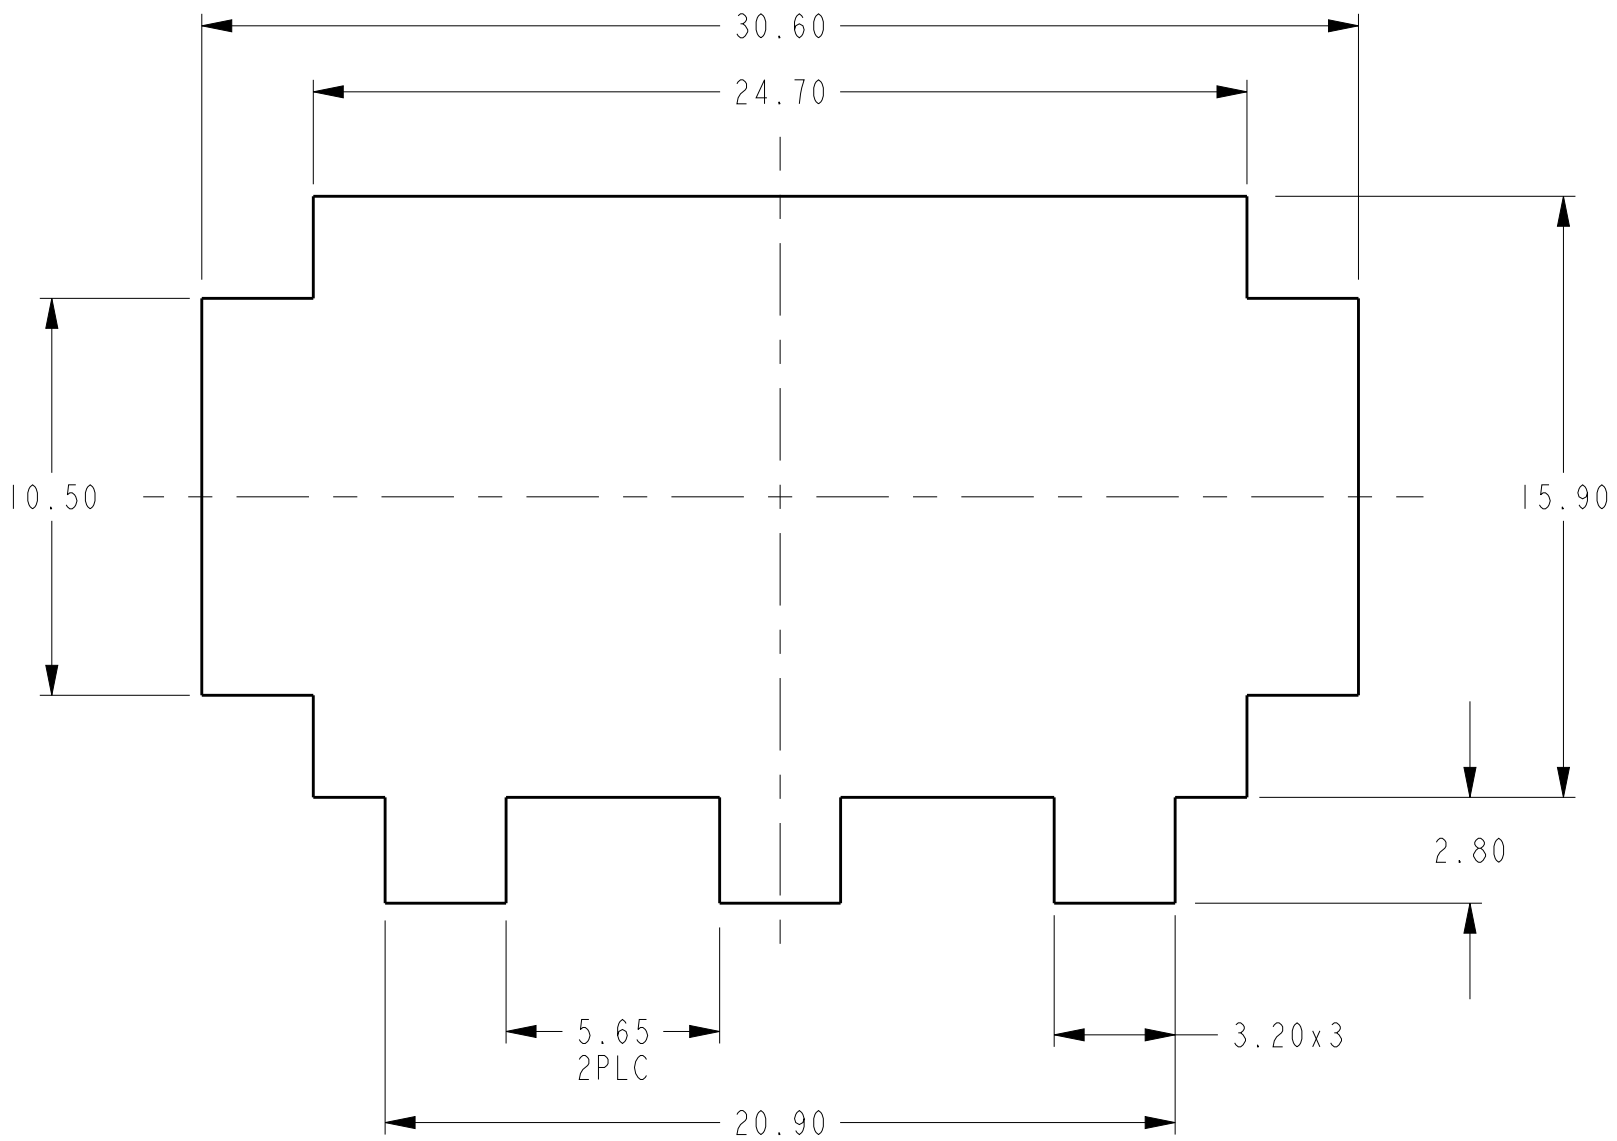
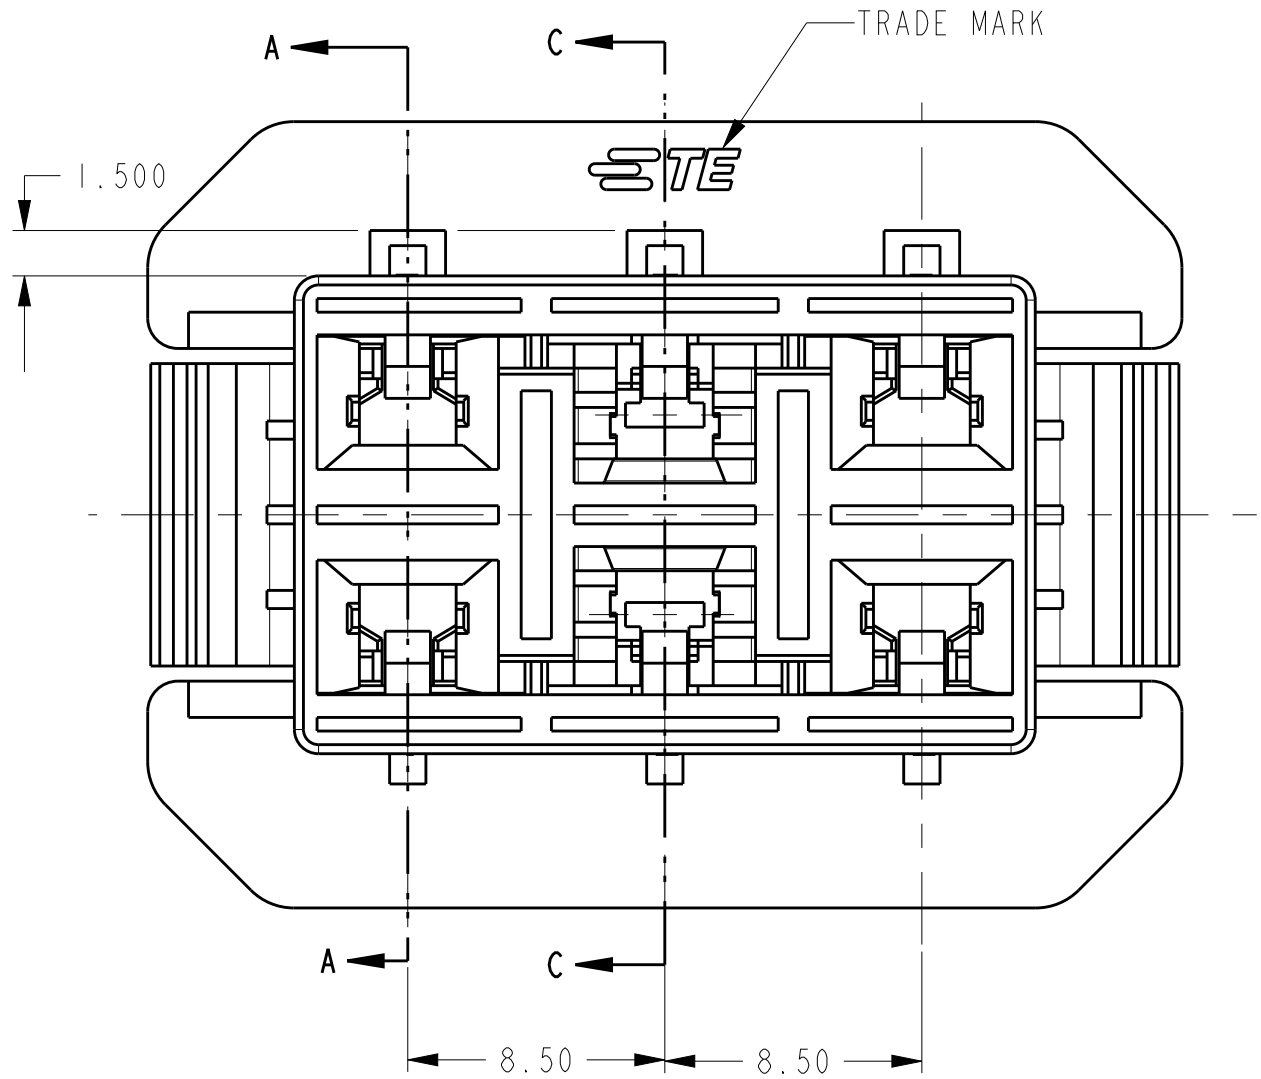
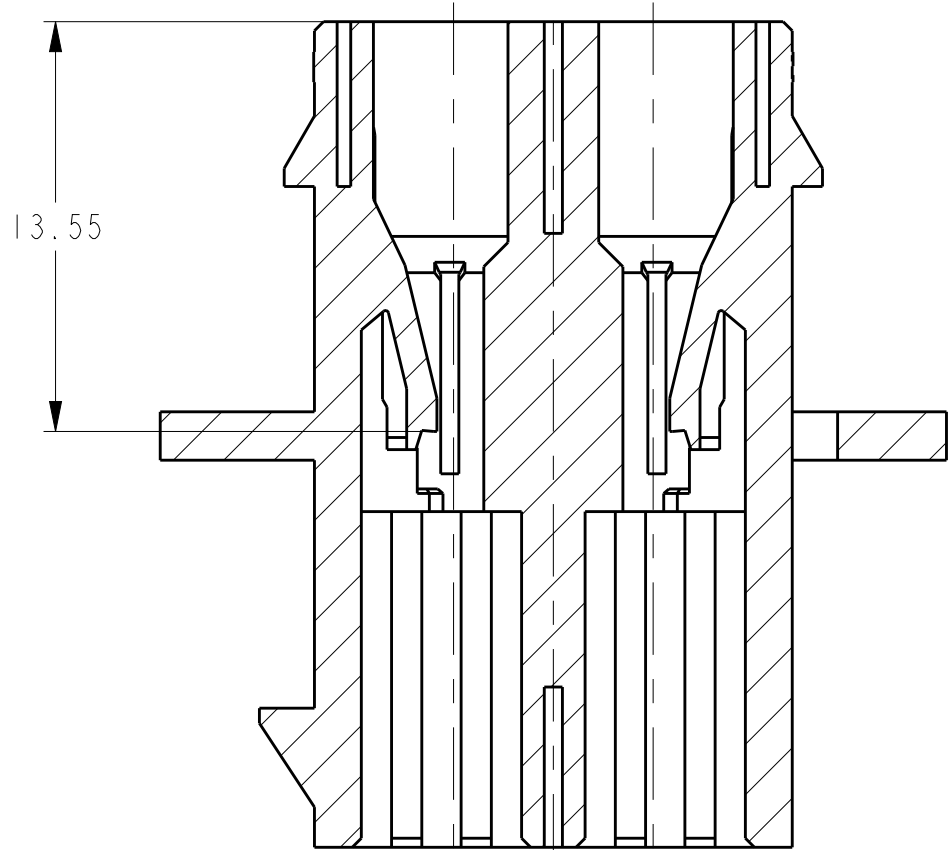



LOC		DIST		REVISIONS					
-	-	P	LTR	DESCRIPTION		DATE	DWN	APVD	
			A	RELEASED		17AUG2011	R.C	E.K	
			A1	ADD "GWT REQUIREMENTS" IN NOTE 7.		11OCT2012	DZ	YH.M	

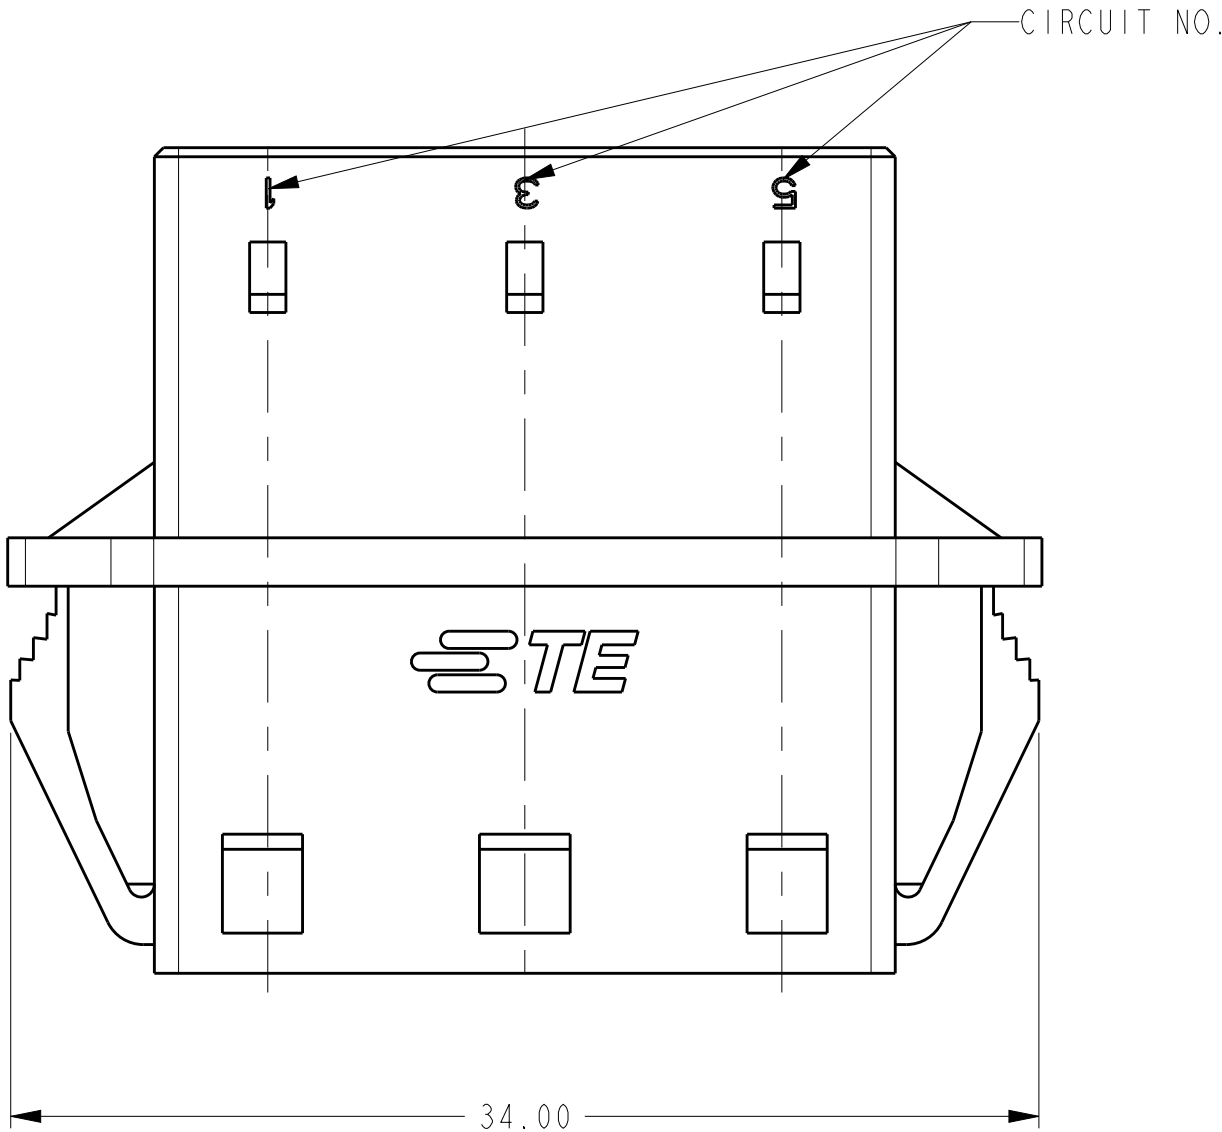

RECOMMENDED PANEL OPENING DIMENSIONS
(TOLERANCE:±0.05mm)

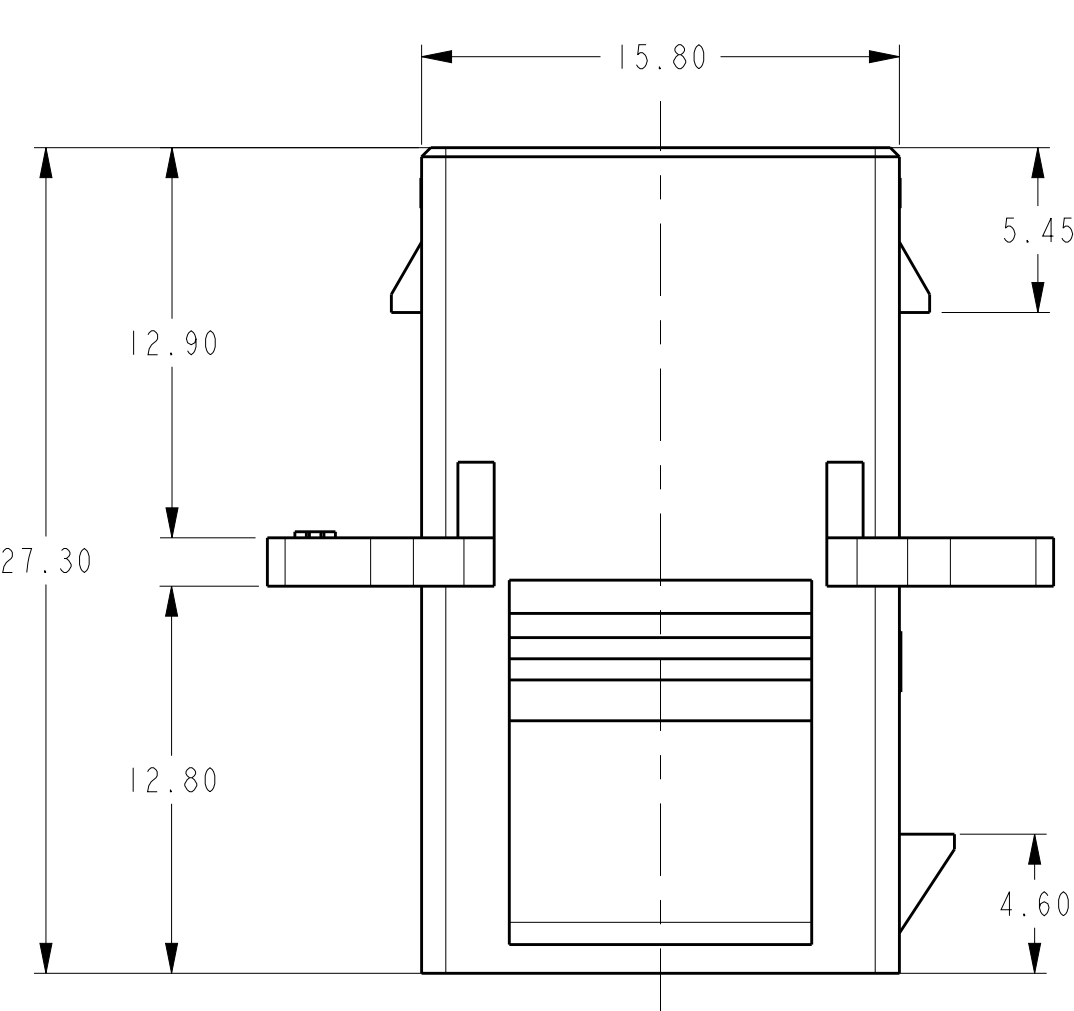



SECTION A-A

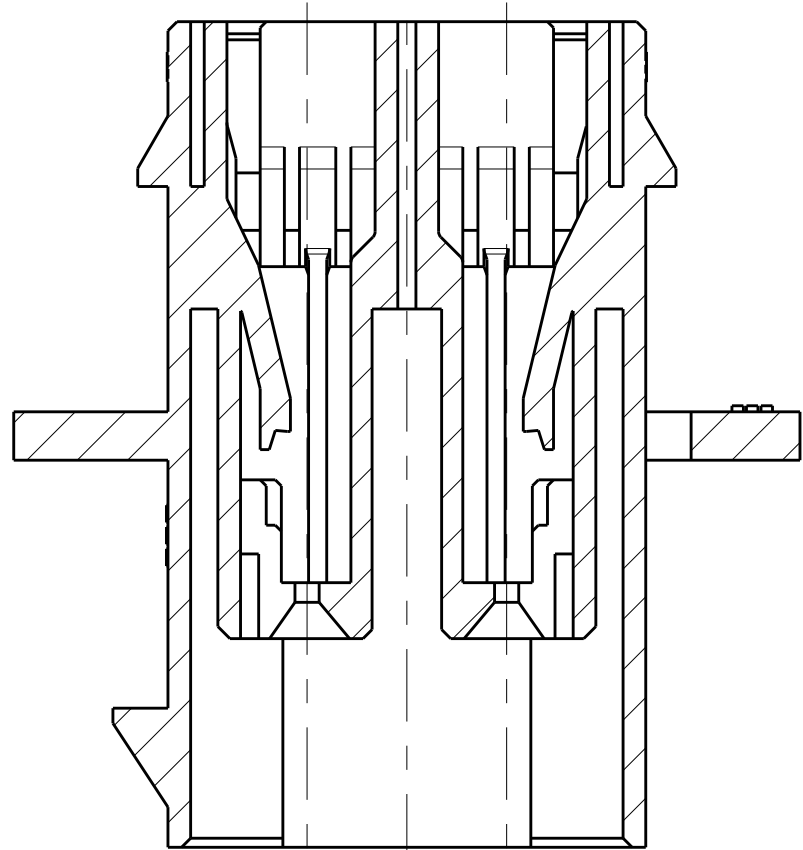

SECTION C-C

NOTE

- 1 MATERIAL: THERMOPLASTIC, UL94 V-0, COLOR: NATURAL
- 2 PRODUCT SPEC: 108-106071
- 3 APPLICABLE CONTACT P/N:
TAB CONTACT: 1983661/2-1
REC CONTACT: 1983663/4-1
- 4 MATING CONN. P/N:
HSG: 1983660-1 (2P), 1983659-1 (4P)
- 5 APPLICABLE DOUBLE LOCK PLATE P/N: 1983667-1
- 6 APPLICABLE PANEL THICKNESS: 1.2mm
7. PRODUCT COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT).

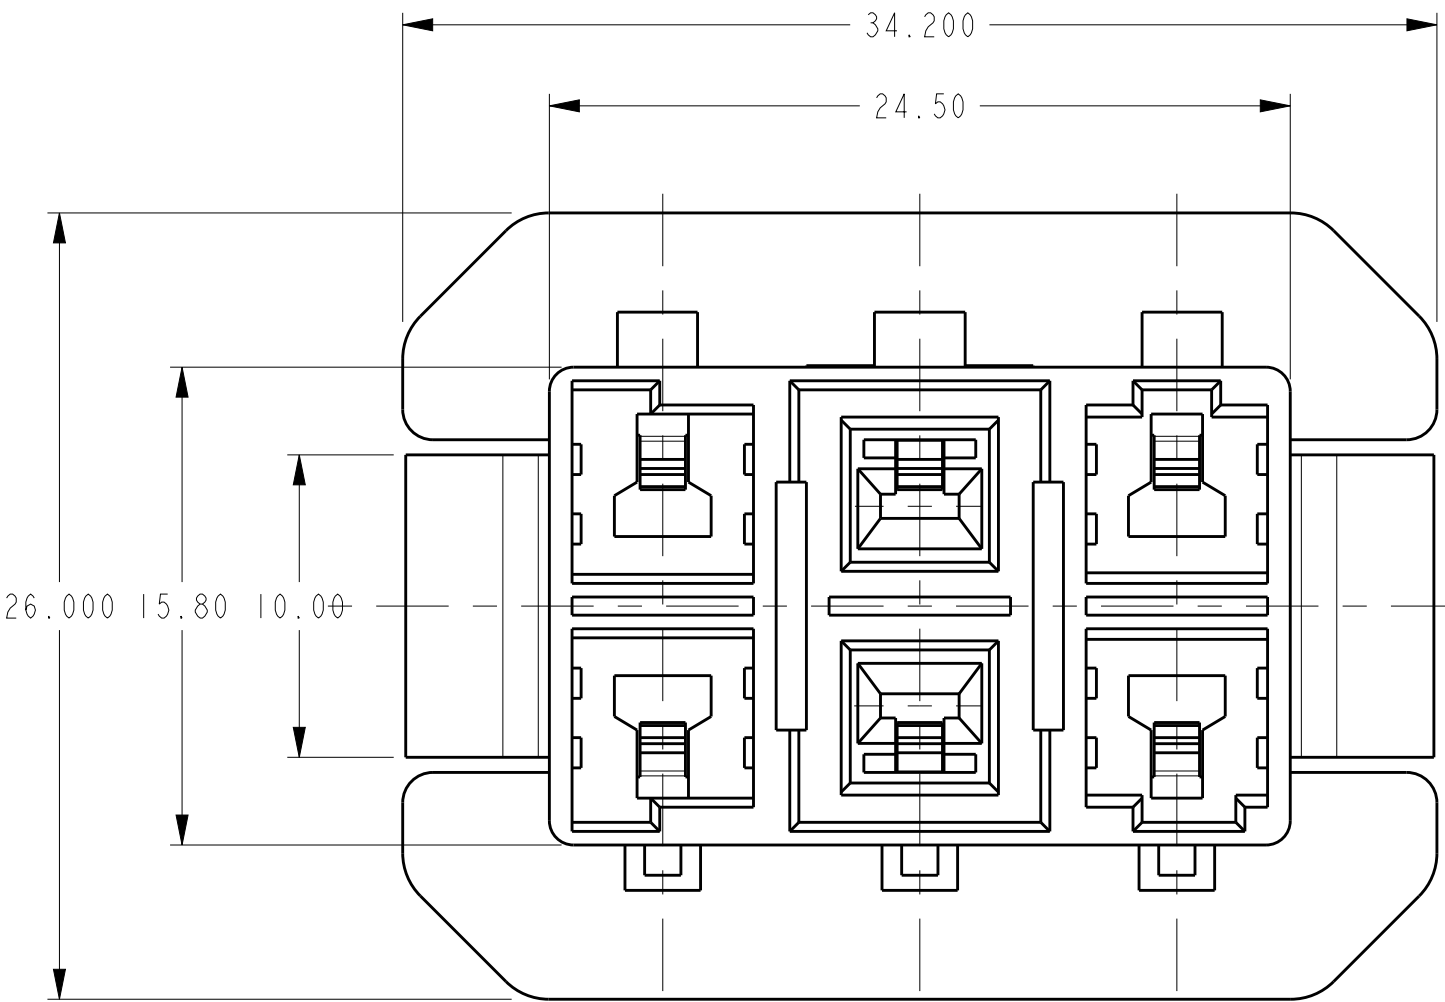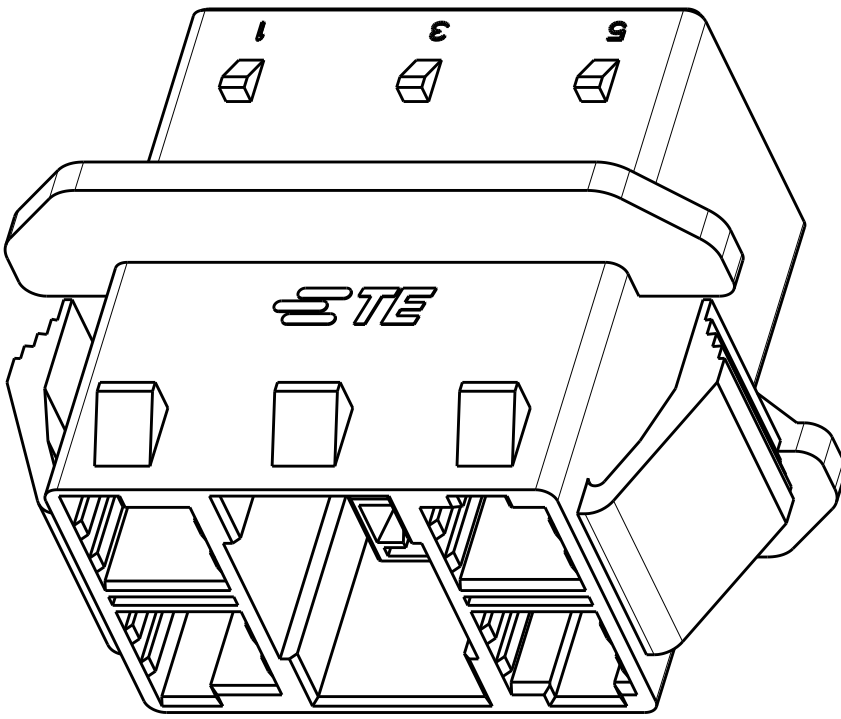

THIS DRAWING IS A CONTROLLED DOCUMENT.				PART NUMBER		1983658-1	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN 19AUG2011		 TE Connectivity	
				CHKD RICHARD CHEN			
mm		0 PLC ±		CNC HAPYE WU 19AUG2011		NAME	
		APVD FRIC KONG 19AUG2011		MULTI 6P CONNECTOR			
		PRODUCT SPEC					
		108-106071					
		APPLICATION SPEC					
MATERIAL		FINISH		114-106071		RESTRICTED TO	
-		-		SIZE		CAGE CODE	
				DRAWING NO		A1 00779 C=1983658	
				WEIGHT		SCALE N/A	
				CUSTOMER DRAWING		SHEET 1 OF 1	
						REV A	