


0.8A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

FEATURES:

Glass Passivated Chip Junction
Reverse Voltage - 100 to 1000 V
Average Rectified Output Current-1A
High Surge Current Capability
Designed for Surface Mount Application

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

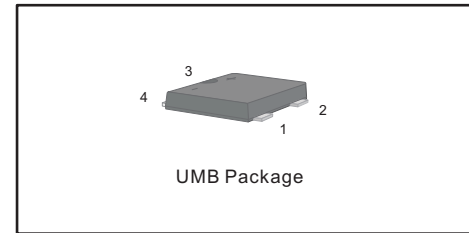

MECHANICAL DATA

- Case: UMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 45mg 0.0016oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	UM1B-10	UM2B-10	UM4B-10	UM6B-10	UM8B-10	UM10B-10	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_c = 115\text{ }^{\circ}\text{C}$	I_O	1						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	35						A
Forward Voltage per element @ $I_F = 0.4\text{A}$ @ $I_F = 0.8\text{A}$	V_F	1.0 1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_a = 25\text{ }^{\circ}\text{C}$ @ $T_a = 125\text{ }^{\circ}\text{C}$	I_R	3 30						μA
Typical Junction Capacitance (Note1)	C_j	13						pF
Typical Thermal Resistance (Note2)	$R_{\theta JA}$	110						$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150						$^{\circ}\text{C}$

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. P.C.B. mounted with 4×1.5"×1.5" (3.81×3.81 cm) copper pad areas.

Fig.1 Average Rectified Output Current Derating Curve

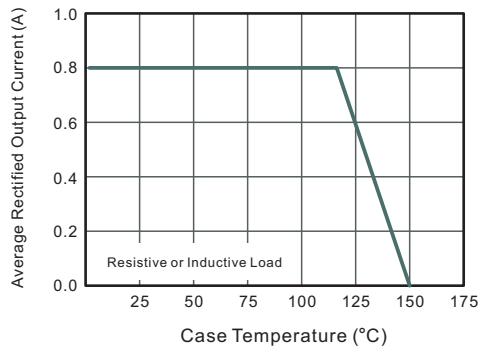


Fig.2 Typical Reverse Characteristics

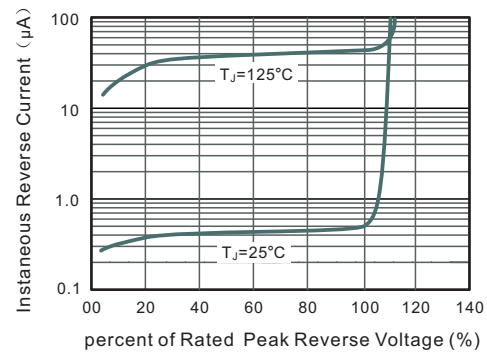


Fig.3 Typical Instantaneous Forward Characteristics

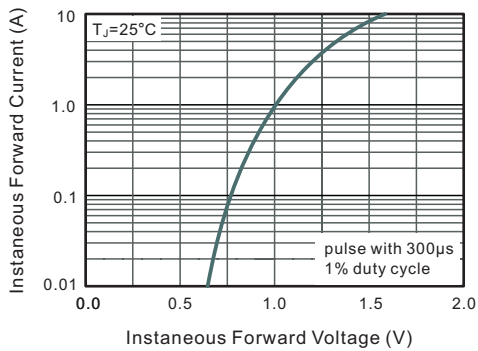


Fig.4 Typical Junction Capacitance


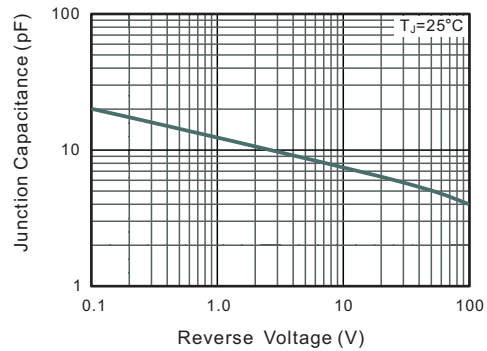



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

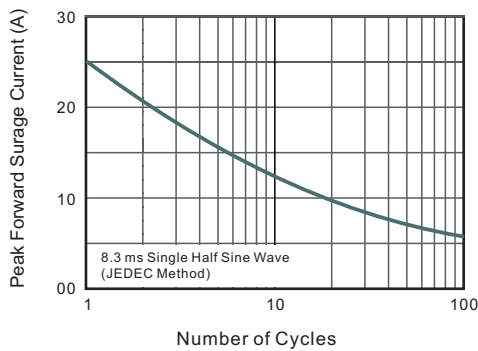

PACKAGE OUTLINE

Plastic surface mounted package; 4 leads


UMB

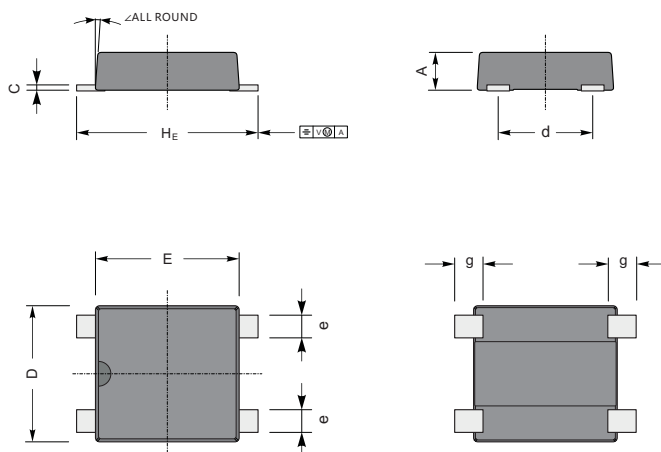

UMB mechanical data

UNIT		A	C	D	E	H _E	g	d	e	∠
mm	max	1.2	0.20	3.8	4.0	5.1	0.82	2.7	0.70	7°
	min	1.0	0.12	3.4	3.6	4.6	0.51	2.3	0.51	
mil	max	47	7.9	150	157	201	32	106	28	
	min	39	4.7	134	142	181	20	91	20	

The recommended mounting pad size

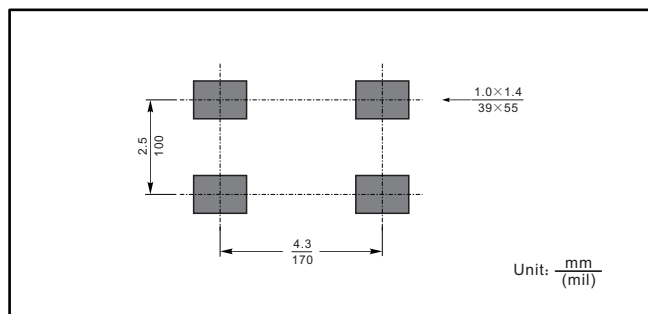

Marking

Type number	Marking code
UM1B-10	10U1
UM2B-10	10U2
UM4B-10	10U4
UM6B-10	10U6
UM8B-10	10U8
UM10B-10	10U10