

## Base strip - MCV 1,5/ 7-G-3,81 P14 THR - 1707052

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 7, Pitch: 3.81 mm, Color: black, Contact surface: Tin, Assembly: SMD/THT/THR, User information and design recommendations for through hole reflow technology can be found under "Downloads"



The figure shows a 10-position version of the product

### Product Features

- ✓ Pitch: 3.5 and 3.81 mm
- ✓ Plug-in direction vertical to the PCB
- ✓ Delivery form: box packaging, in bulk for small series
- ✓ Low-profile THR headers with compact pitches
- ✓ Use in SMT reflow processes



### Key commercial data

|                        |          |
|------------------------|----------|
| Packing unit           | 1 pc     |
| Minimum order quantity | 50 pc    |
| Custom tariff number   | 85366990 |
| Country of origin      | Germany  |

### Technical data

#### Dimensions

|                |              |
|----------------|--------------|
| Length         | 7.25 mm      |
| Pitch          | 3.81 mm      |
| Dimension a    | 22.86 mm     |
| Pin dimensions | 0,8 x 0,8 mm |
| Hole diameter  | 1.4 mm       |

#### General

|                           |                   |
|---------------------------|-------------------|
| Range of articles         | MCV 1,5/...-G-THR |
| Insulating material group | IIIa              |

## Base strip - MCV 1,5/ 7-G-3,81 P14 THR - 1707052

### Technical data

#### General

|                                         |        |
|-----------------------------------------|--------|
| Rated surge voltage (III/3)             | 2.5 kV |
| Rated surge voltage (III/2)             | 2.5 kV |
| Rated surge voltage (II/2)              | 2.5 kV |
| Rated voltage (III/3)                   | 160 V  |
| Rated voltage (III/2)                   | 160 V  |
| Rated voltage (II/2)                    | 250 V  |
| Connection in acc. with standard        | EN-VDE |
| Nominal current $I_N$                   | 8 A    |
| Maximum load current                    | 8 A    |
| Insulating material                     | LCP    |
| Inflammability class according to UL 94 | V0     |
| Color                                   | black  |
| Number of positions                     | 7      |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Base strip - MCV 1,5/ 7-G-3,81 P14 THR - 1707052

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

|                                                                                                  |       |       |
|--------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                  | B     | D     |
| Nominal current I <sub>N</sub>                                                                   | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                   | 300 V | 300 V |

|                                                                                                    |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                    | B     | D     |
| Nominal current I <sub>N</sub>                                                                     | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V |

|                                                                                          |  |  |
|------------------------------------------------------------------------------------------|--|--|
| GOST  |  |  |
|------------------------------------------------------------------------------------------|--|--|


|                                                                                          |  |  |
|------------------------------------------------------------------------------------------|--|--|
| GOST  |  |  |
|------------------------------------------------------------------------------------------|--|--|

|                                                                                                      |  |  |
|------------------------------------------------------------------------------------------------------|--|--|
| cULus Recognized  |  |  |
|------------------------------------------------------------------------------------------------------|--|--|


## Base strip - MCV 1,5/ 7-G-3,81 P14 THR - 1707052

### Drawings

Drilling diagram

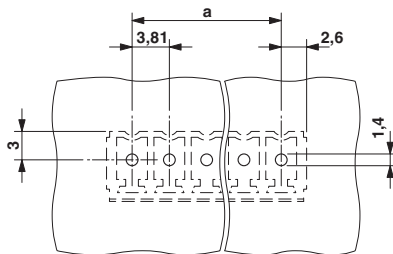

Diagram

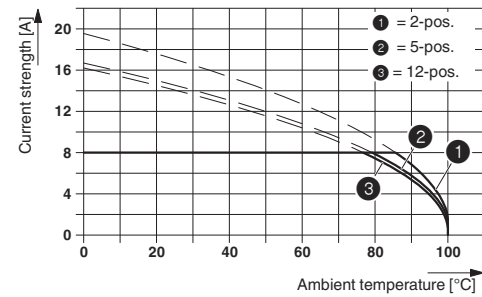

Dimensioned drawing

