
WC26G Series Crystal

- **SMD Tuning Fork Crystal**
- **Gull Wing Leads**
- **Optional Mounting Jacket**
- **RoHS Compliant**



Frequency	32.768KHZ
Tolerance at +25°C	See Part Number Guide
Stability	-0.034 ±0.006 ppm / °C^2
Operating Temperature	-40°C to ±85°C
Storage Temperature	-55°C to ±125°C
Load Capacitance	See Part Number Guide
Shunt Capacitance	1.05pF Max
Equivalent Series Resistance	50k Ohms Max
Drive Level	1uW max
Aging	±3 ppm first year
Quality Factor	40000 typ

Part Number Guide

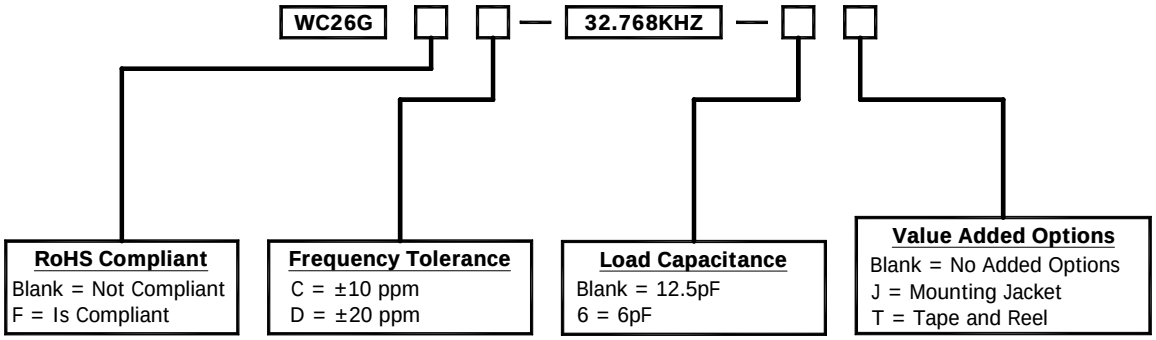


Please consult with MMD sales department for any other parameters or options.

MMD Monitor/Quartztek
30400 Esperanza, Rancho Santa Margarita, CA, 92688
Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
Sales@mmdcomp.com

Revision:	WC26G082812E


Mechanical Details

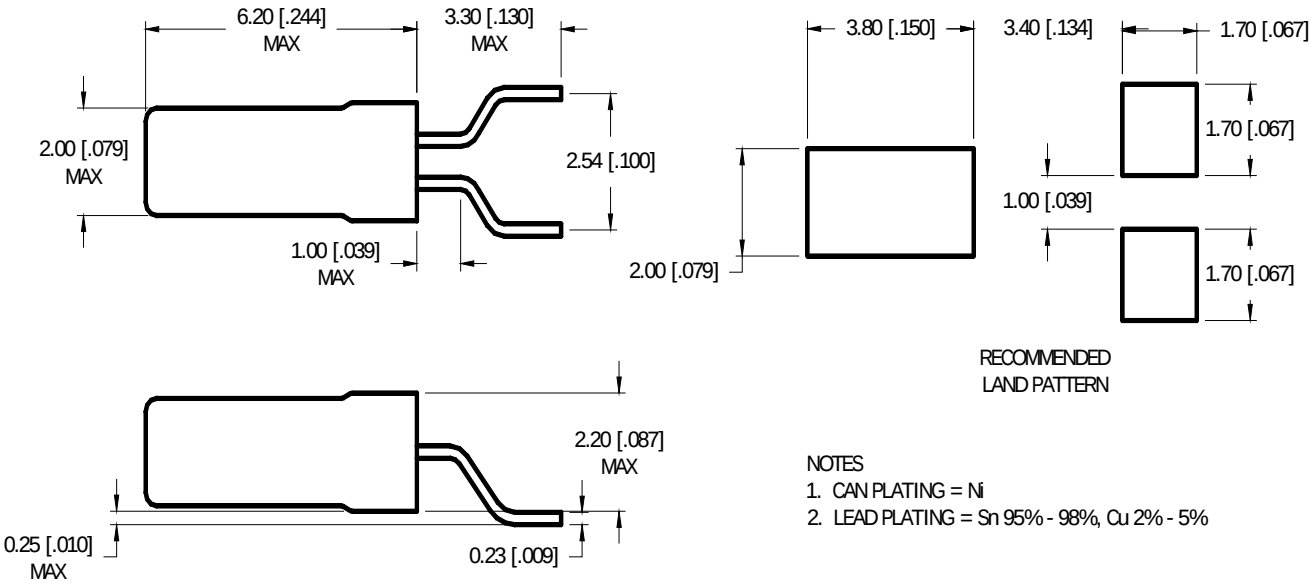

NOTES
1. CAN PLATING = Ni
2. LEAD PLATING = Sn 95% - 98%, Cu 2% - 5%

DIMENSION IN BRACKETS ARE IN INCHES

Mechanical Details with Mounting Bracket

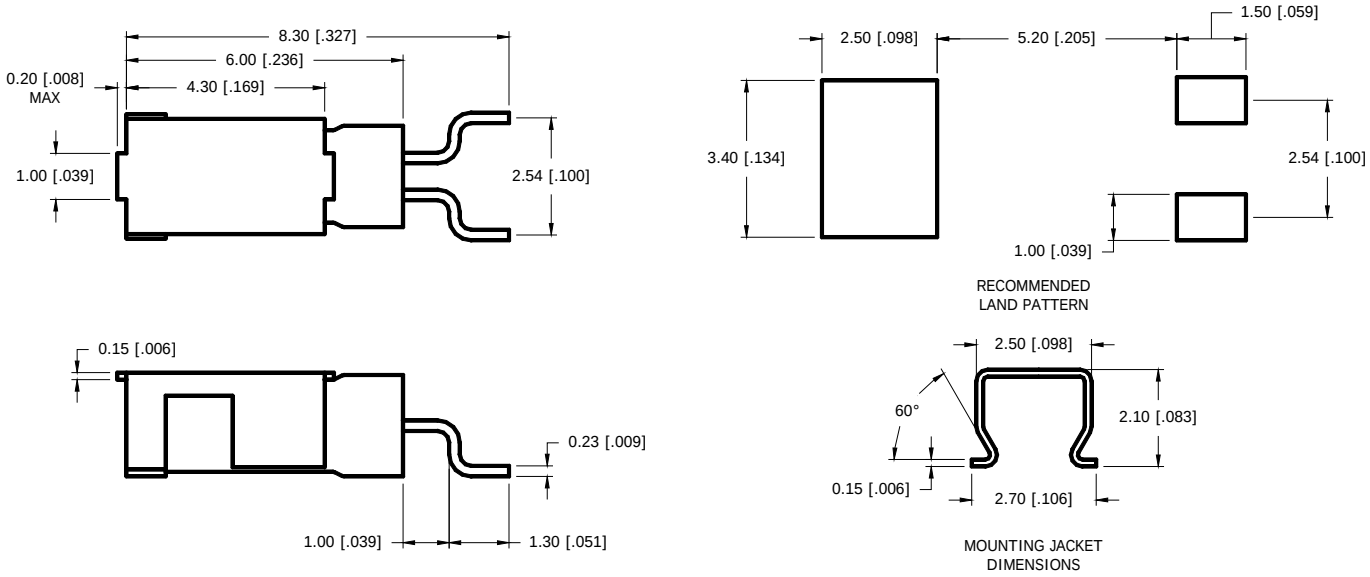

DIMENSION IN BRACKETS ARE IN INCHES

MMD Monitor / Quartztek
30400 Esperanza, Rancho Santa Margarita, CA, 92688
Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
Sales@mmdcomp.com

Revision:	WC26G082812E