
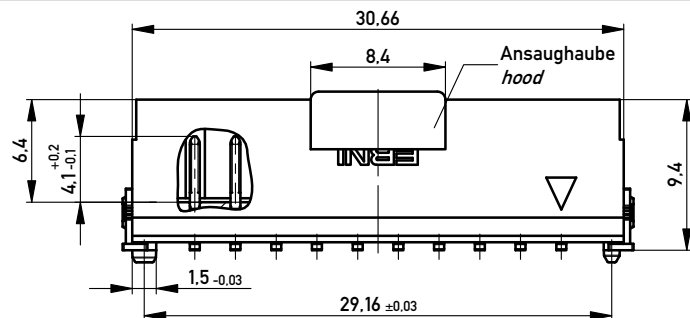
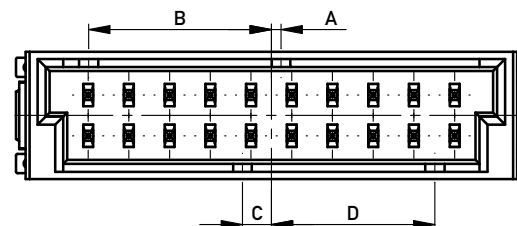


ohne Ansaughaube - without hood

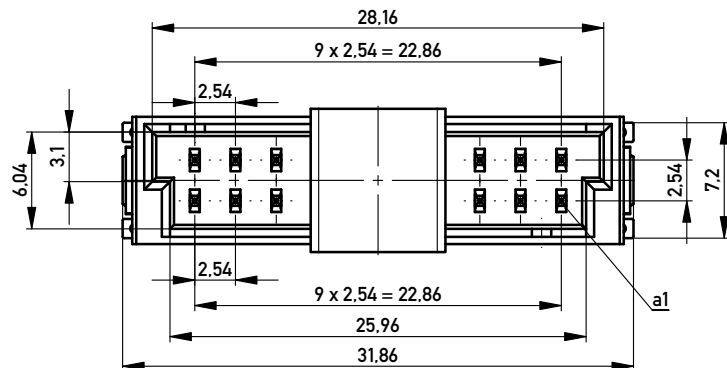


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

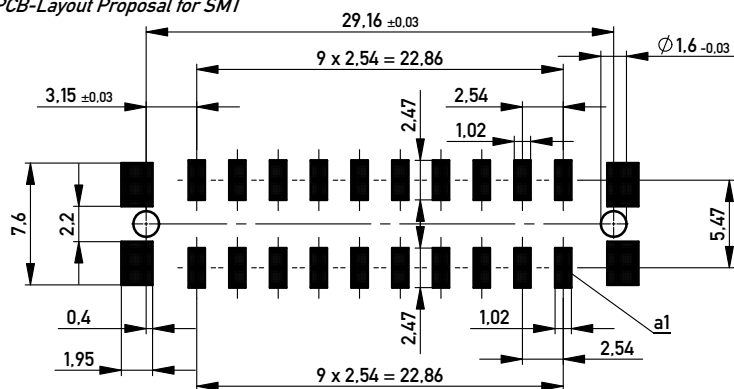

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs



Abspulrichtung - Reel off Direction

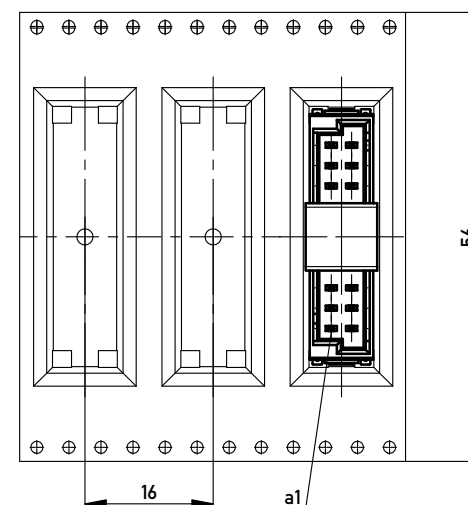

464689		rot red	5.4	6.6	0.6	11.4	
464688		grün green	3.6	8.4	5.4	6.6	
464687		blau blue	1.8	10.2	3.6	8.4	
464686		schwarz black	0.6	11.4	1.8	10.2	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

für höhere Spannungsfestigkeit
for higher voltage proof

Information:				Tolerances				Scale		3:1	
						All Dimensions in mm					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation M 2,54 DRC-Q, 20-polig			
				b		27.11.2013				www.ERNI.com	
Index		Date						Class		DRCQ	
										A3	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 10165 to be observed

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.