


- UL94V-0 Recognized Components
- UL1446 Clas B Insulating System
- Power Ferrite Materials
- 2750 Vrms Isolation


Primary Specification

Inductance ($\mu\text{H} \pm 15\%$)	Leakage Inductance ($\mu\text{H Typ.}$)	Turns Ratio	DCR ($\Omega \pm 15\%$)	
@ 10 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms			
225	6.2	1:1:1:1	0.115	0.145
Pins 1-2	Pins 1-4 w/5,6,7,8 shorted	Pins 1-2:3-4:5-6:7-8	Pins 1-2, 5-6	Pins 3-4, 7-8

Package

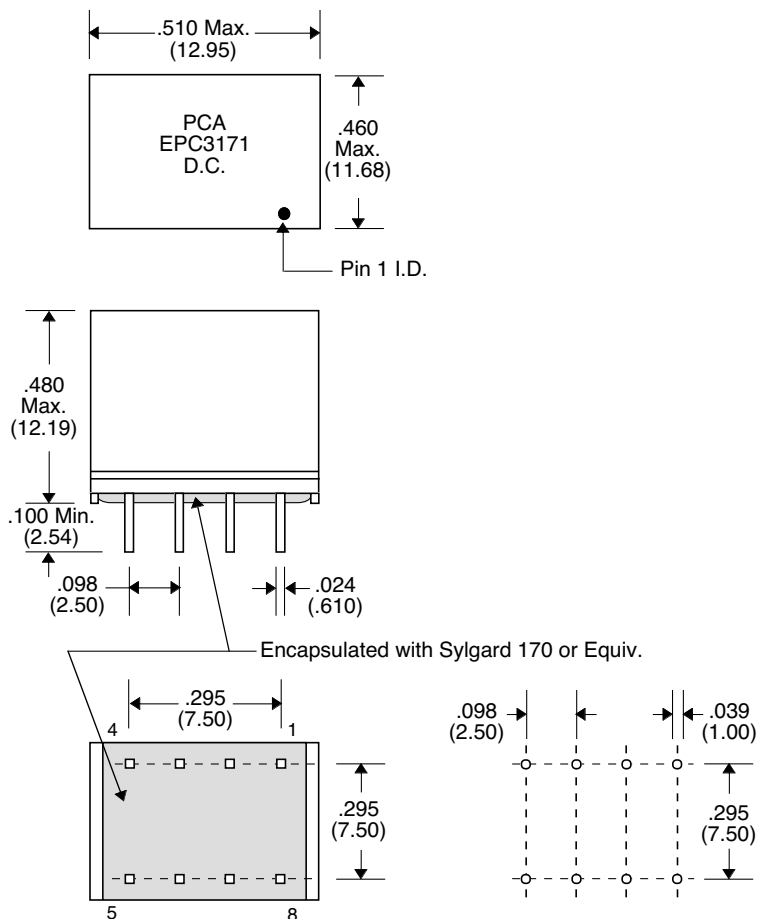

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$