


2.0mm DUAL ROW SOCKET S.M.D. BOTTOM ENTRY TYPE

(2.25mm PLASTIC HEIGHT)

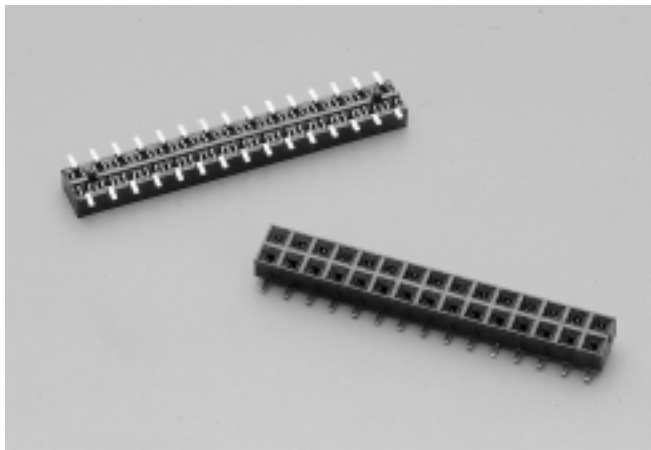


200189FA Series

Mates With SUYIN 200109, 200112, 200114, 200121, 2008□□, 200194 Series

Specifications:

- 8-60 Circuits
- Insulator material : Black High Temp. Plastic
- Operating Temp. Range : -40°C to +105°C
- Terminal Material : Phosphor Bronze
- Plating : Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 seconds)

2.0 mm

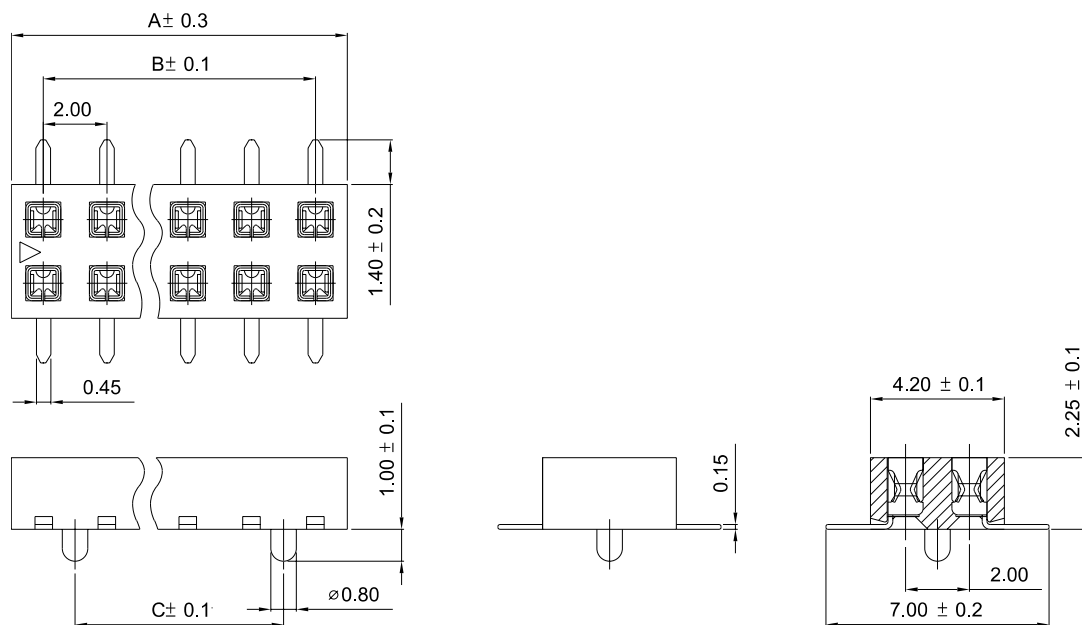

Order Information

200189FA□□□□00ZU
 1 2 3 4 5

1. 'A': Straight SMT Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package
 'U': Tube Package Without CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	DIM.C
200189FA008□□00ZU	8.0	6.0	4.0
200189FA010□□00ZU	10.0	8.0	6.0
200189FA012□□00ZU	12.0	10.0	8.0
200189FA014□□00ZU	14.0	12.0	10.0
200189FA016□□00ZU	16.0	14.0	12.0
200189FA018□□00ZU	18.0	16.0	14.0
200189FA020□□00ZU	20.0	18.0	16.0

SUYIN P/NO.	DIM.A	DIM.B	DIM.C
200189FA022□□00ZU	22.0	20.0	18.0
200189FA024□□00ZU	24.0	22.0	20.0
200189FA030□□00ZU	30.0	28.0	26.0
200189FA040□□00ZU	40.0	38.0	36.0
200189FA044□□00ZU	44.0	42.0	40.0
200189FA050□□00ZU	50.0	48.0	46.0
200189FA060□□00ZU	60.0	58.0	56.0

Recommended P.C.B Layout

