


# M3H & MH Series

## 8 pin DIP, 5.0 or 3.3 Volt, HCMOS/TTL Clock Oscillator



- 5.0 Volt or 3.3 Volt Versions
- RoHS Compliant Version available
- Low Jitter

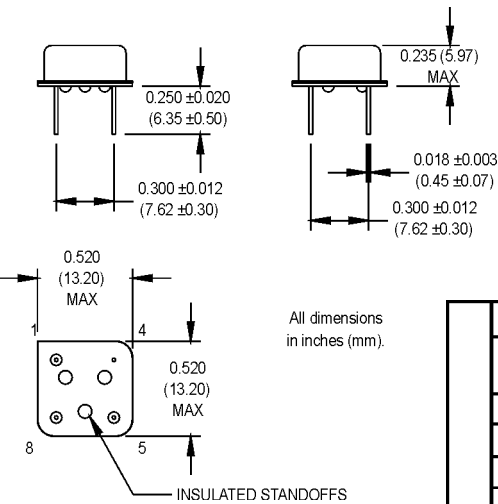

### Pin Connections

PIN	FUNCTION
1	N/C or Tristate
4	Circuit/Case Ground
5	Output
8	+Vdd

**Ordering Information**

00.0000  
MHz

M3H / MH    1    3    F    A    D    -R

**Product Series**  
M3H = 3.3 Volt  
MH = 5.0 Volt

**Temperature Range**  
1: 0°C to +70°C    2: -40°C to +85°C  
3: -55°C to +105°C    4: -55°C to +125°C  
5: -10°C to +85°C    6: -20°C to +70°C  
7: 0°C to +85°C

**Stability**  
1: ±1000 ppm    2: ±500 ppm  
3: ±100 ppm    4: ±50 ppm  
5: ±35 ppm    6: ±25 ppm  
7: +0/-200 ppm    \* 8: ±20 ppm

**Output Type**  
F: Fixed    T: Tristate

**Symmetry/Logic Compatibility**  
A: 40/60 HCMOS/TTL    B: 45/55 TTL (MH series only)  
C: 45/55 HCMOS    D: 45/55 HCMOS/TTL (MH to 50 MHz only)

**Package/Lead Configurations**  
D: DIP; Nickel Header    G: Gull Wing; Nickel Header

**RoHS Compliance**  
Blank: non-RoHS compliant part  
-R: RoHS compliant part

**Frequency (customer specified)**

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	1.5		100	MHz	M3H
		1.0		80	MHz	MH    See Note 1
Operating Temperature	T <sub>A</sub>	(See Ordering Information)				
Storage Temperature	T <sub>s</sub>	-55		+125	°C	
Frequency Stability	ΔF/F	(See Ordering Information)				
Aging						
1st Year			±3		ppm	
Thereafter (per year)			±2		ppm	
Input Voltage	V <sub>dd</sub>	3.135	3.3	3.465	V	M3H
		4.5	5.0	5.5	V	MH
Input Current (M3H)	I <sub>dd</sub>			25	mA	1.500 to 50.000 MHz
				35	mA	50.001 to 67.000 MHz
				55	mA	67.001 to 100.000 MHz
Input Current (MH)	I <sub>dd</sub>			40	mA	1.000 to 40.000 MHz
				60	mA	40.001 to 80.000 MHz
Output Type						HCMOS/TTL
Load		2 TTL or 15 pF				M3H
		10 TTL or 50 pF				MH    See Note 2
Symmetry (Duty Cycle)		(See Ordering Information)				
Logic "1" Level	V <sub>oh</sub>	90% V <sub>dd</sub>			V	HCMOS Load
		V <sub>dd</sub> -0.5			V	TTL Load
Logic "0" Level	V <sub>ol</sub>			10% V <sub>dd</sub>	V	HCMOS Load
				0.5	V	TTL Load
Output Current				±4	mA	M3H
				±16	mA	MH
Rise/Fall Time	Tr/Tf			10	ns	See Note 4
Tristate Function		Input Logic "1" or floating; output active Input Logic "0"; output disables to high-Z				
Start up Time			5		ms	
Random Jitter	R <sub>j</sub>		5	12	ps RMS	1-Sigma

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.