


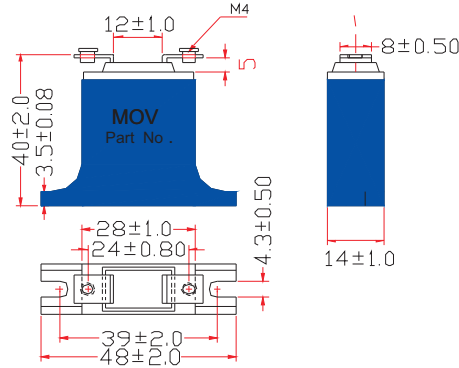
METAL OXIDE VARISTOR

Housing Type 40KA


Part Number	Maximum Allowable Voltage		Varistor Voltage		Maximum Clamping Voltage At 150A (V)	Withstanding Surge Current 8/20 S (A)	Rated Wattage (W)	Energy 10/1000 s (J)	UL 
	ACrms (V)	DC (V)	DC (V)	Tolerance Range					
MOV-201KS34H	130	175	200	185-225	330	40,000	1.4	310	✓
MOV-221KS34H	140	180	220	198-242	360	40,000	1.4	330	✓
MOV-241KS34H	150	200	240	216-264	395	40,000	1.4	360	✓
MOV-271KS34H	175	225	270	243-297	455	40,000	1.4	390	✓
MOV-301KS34H	190	250	300	270-330	505	40,000	1.4	410	✓
MOV-331KS34H	210	275	330	297-363	550	40,000	1.4	430	✓
MOV-361KS34H	230	300	360	324-396	595	40,000	1.4	460	✓
MOV-391KS34H	250	330	390	351-429	650	40,000	1.4	490	✓
MOV-431KS34H	275	370	430	387-473	710	40,000	1.4	550	✓
MOV-471KS34H	300	385	470	423-517	775	40,000	1.4	600	✓
MOV-511KS34H	320	420	510	459-561	845	40,000	1.4	640	✓
MOV-561KS34H	350	460	560	504-616	920	40,000	1.4	660	✓
MOV-621KS34H	385	505	620	558-682	1025	40,000	1.4	700	✓
MOV-681KS34H	420	560	680	612-748	1120	40,000	1.4	740	✓
MOV-751KS34H	480	640	750	675-825	1240	40,000	1.4	780	✓
MOV-781KS34H	485	640	780	702-858	1290	40,000	1.4	820	✓
MOV-821KS34H	510	675	820	738-902	1355	40,000	1.4	900	✓
MOV-911KS34H	575	745	910	819-1001	1500	40,000	1.4	960	✓
MOV-102KS34H	660	850	1000	945-1155	1650	40,000	1.4	1040	✓
MOV-112KS34H	680	895	1100	990-1210	1815	40,000	1.4	1100	✓
MOV-122KS34H	750	970	1200	1080-1320	1925	40,000	1.4	1150	✓
MOV-152KS34H	900	1200	1500	1350-1650	2475	40,000	1.4	1200	✓
MOV-182KS34H	1000	1465	1800	1620-1980	2970	40,000	1.4	1500	✓

* Add suffix - L for RoHS Compliant

■ Dimensions



■ PULSE RATING CURVES

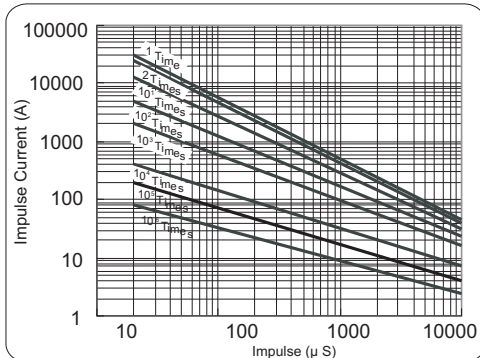

■ V-I CHARACTERISTIC CURVES

