

Rack-mounted DCS Signal Conditioners 18-RACK

(all outputs internally connected)

PULSE GENERATOR


(for testing)

Functions & Features

- Generating pulses from 50 Hz up to 6 kHz
- Output frequencies are easily adjustable

Typical Applications

- Generated pulses can be used for function checks of the entire control system



OUTPUT SPECIFICATIONS

- Open Collector: 50 V DC @ 50 mA
- Frequency: 50 Hz – 6 kHz
- Duty ratio: 50 %
- Output adjustment: 270°-turn screwdriver (front)
- Saturation voltage: 0.5 V DC

INSTALLATION

- Current consumption: Approx. 20 mA
- Operating temperature: -5 to +55°C (23 to 131°F)
- Operating humidity: 30 to 90 %RH (non-condensing)
- Mounting: Standard Rack 18BXx or 18KBXx
- Weight: 150 g (0.33 lb)

PERFORMANCE in percentage of span

- Line voltage effect: ± 0.5 % over voltage range
- Insulation resistance: ≥ 100 M Ω with 500 V DC
- 500 V AC @1 minute (output to power to ground)

MODEL: 18APT-022-R

ORDERING INFORMATION

- Code number: 18APT-022-R

INPUT

0: None

OUTPUT 1

2: Open collector

OUTPUT 2

2: Open collector

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V ± 10 %, ripple 10 %p-p max.)

GENERAL SPECIFICATIONS

Construction: Rack-mounted; terminal access via screw terminals on the front and connector on the rear; terminal cover provided

Connection

Output 1 & 2: Connector


Monitor output: M3.5 screw terminals (torque 0.8 N·m)

Power input: Supplied from connector


Screw terminal: Nickel-plated steel

Isolation: Output to power


EXTERNAL VIEW

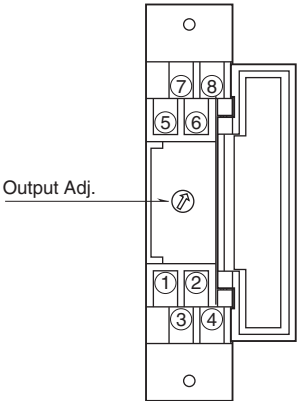


EXTERNAL DIMENSIONS unit: mm (inch)

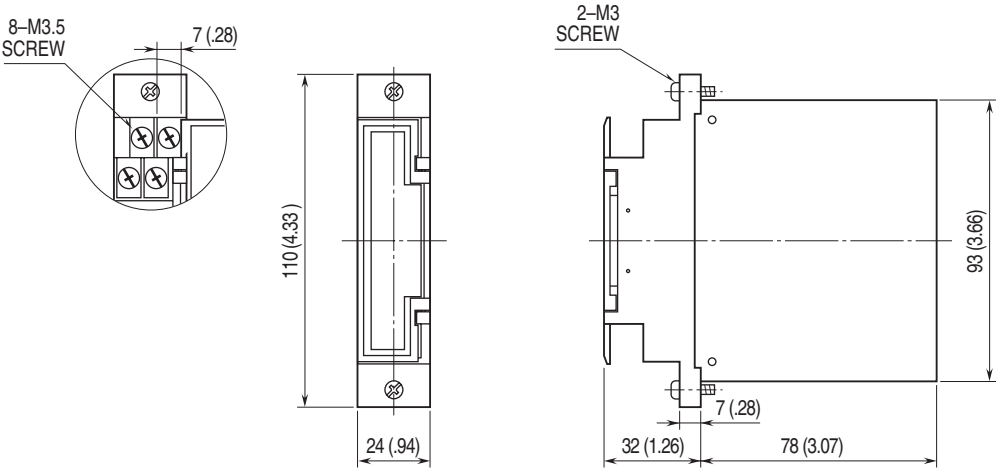

TERMINAL ASSIGNMENTS



SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

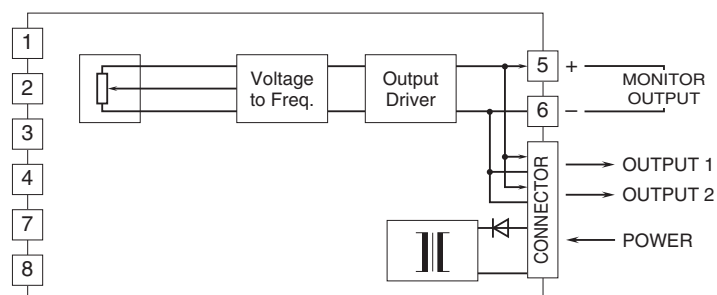

Note: Output 1, 2 and monitor outputs are all internally connected.



Specifications are subject to change without notice.