

ULTRA LOW IMPEDANCE AT HIGH FREQUENCY, RADIAL LEADS,
POLARIZED ALUMINUM ELECTROLYTIC CAPACITORS

FEATURES

- VERY LOW IMPEDANCE
- LONG LIFE AT 105°C (Up to 4000 Hrs.)
- HIGH STABILITY AT LOW TEMPERATURE
- IDEALLY SUITED FOR USE IN SWITCHING POWER SUPPLIES & CONVERTORS

**RoHS
Compliant**
includes all homogeneous materials
*See Part Number System for Details



CHARACTERISTICS

Rated Voltage Range	6.3 ~ 16			
Rated Capacitance Range	470 ~ 3,300 μ F			
Operating Temp. Range	-40°C ~ +105°C			
Capacitance Tolerance	$\pm 20\%$ (M)			
Max. Leakage Current After 2 Minutes @ 20°C	0.03CV			
Surge Voltage Ratings and Maximum Tan δ (add 0.02 for every 1,000 μ F for values above 1,000 μ F)	W.V.	6.3	10	16
	S.V.	8	13	20
	Tan δ @ 20°C/120Hz	0.22	0.19	0.16
Low Temperature Stability (Impedance Ratio @ 120Hz)	Z -25°C/Z +20°C	2	2	2
	Z -40°C/Z +20°C	3	3	3
Load Life Test @ Rated W.V. & 105°C 2,000 hours for 8x11.5, 8x16, 10x12.5 and 10x16 3,000 hours for 8x20 4,000 hours for 10x20, 10x23	Capacitance Change	Within $\pm 25\%$ of initial measured value		
	Tan δ	Less than 200% of the specified maximum value		
	Leakage Current	Less than specified maximum value		


MAXIMUM ESR (Ω AT 100KHz/20°C)

Cap (μ F)	Code	Working Voltage (Vdc)		
		6.3	10	16
470	471	-	-	0.036
680	681	-	0.036	0.028
				0.026
820	821	0.036	-	-
1000	102	0.030	0.028	0.019
			0.026	0.019
1200	122	0.028	-	-
1500	152	0.019	0.019	0.013
		0.026	0.019	
1800	182	0.019	0.013	0.012
2200	222	0.013	0.012	-
3300	332	0.012	-	-

MAXIMUM RIPPLE CURRENT (mA AT 100KHz/105°C)

Cap (μ F)	Code	Working Voltage (Vdc)		
		6.3	10	16
470	471	-	-	1140
680	681	-	1140	1490
				1540
820	821	1140	-	-
1000	102	1140	1490	1870
			1540	2000
1200	122	1490	-	-
1500	152	1870	1870	2550
		1540	1870	
1800	182	2000	2550	2800
2200	222	2550	2800	-
3300	332	2800	-	-

PART NUMBERING SYSTEM

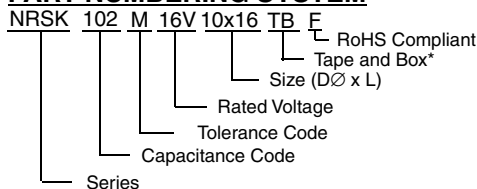

*see tape specification for details

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com

Cap (μF)	Code	Working Voltage (Vdc)		
		6.3	10	16
470	471	-	-	8x11.5
680	681	-	8x11.5	8x16
				10x12.5
820	821	8x11.5	-	-
1000	102	8x11.5	8x16	8x20
			10x12.5	10x16
1200	122	8x16	-	-
1500	152	8x20	8x20	10x20
		10x12.5	10x16	
1800	182	10x16	10x20	10x23
2200	222	10x20	10x23	-
3300	332	10x23	-	-

Case Dia. ($D\phi$)	8	10
Lead Dia. ($d\phi$)	0.6	0.6
Lead Spacing (F)	3.5	5.0
Dim. α	0.5	0.5

Technical drawing of a 1000V 10A plug. The drawing includes a side view and a cross-sectional view. Labels and dimensions are as follows:

- Side View:**
 - Polarity Marking:** Points to the two rectangular slots on the front face.
 - Insulation Sleeve:** Points to the sleeve covering the top and bottom of the front face.
 - dφ ± 0.05:** Dimension for the diameter of the main body.
 - L + β max.:** Dimension for the length of the front face.
 - 15mm Min.:** Dimension for the length of the insulation sleeve.
 - 4mm Min.:** Dimension for the length of the main body.
- Cross-sectional View:**
 - F ± 0.5:** Dimension for the thickness of the front face.
 - Dφ ± α:** Dimension for the diameter of the front face.