


GHz BGA Socket - Direct mount, solderless

Features

- Directly mounts to target PCB (needs tooling holes) with hardware.
- High speed, reliable Elastomer connection
- Minimum real estate required
- Compression plate distributes forces evenly
- Ball guide prevents over compression of elastomer
- Easily removable swivel socket lid

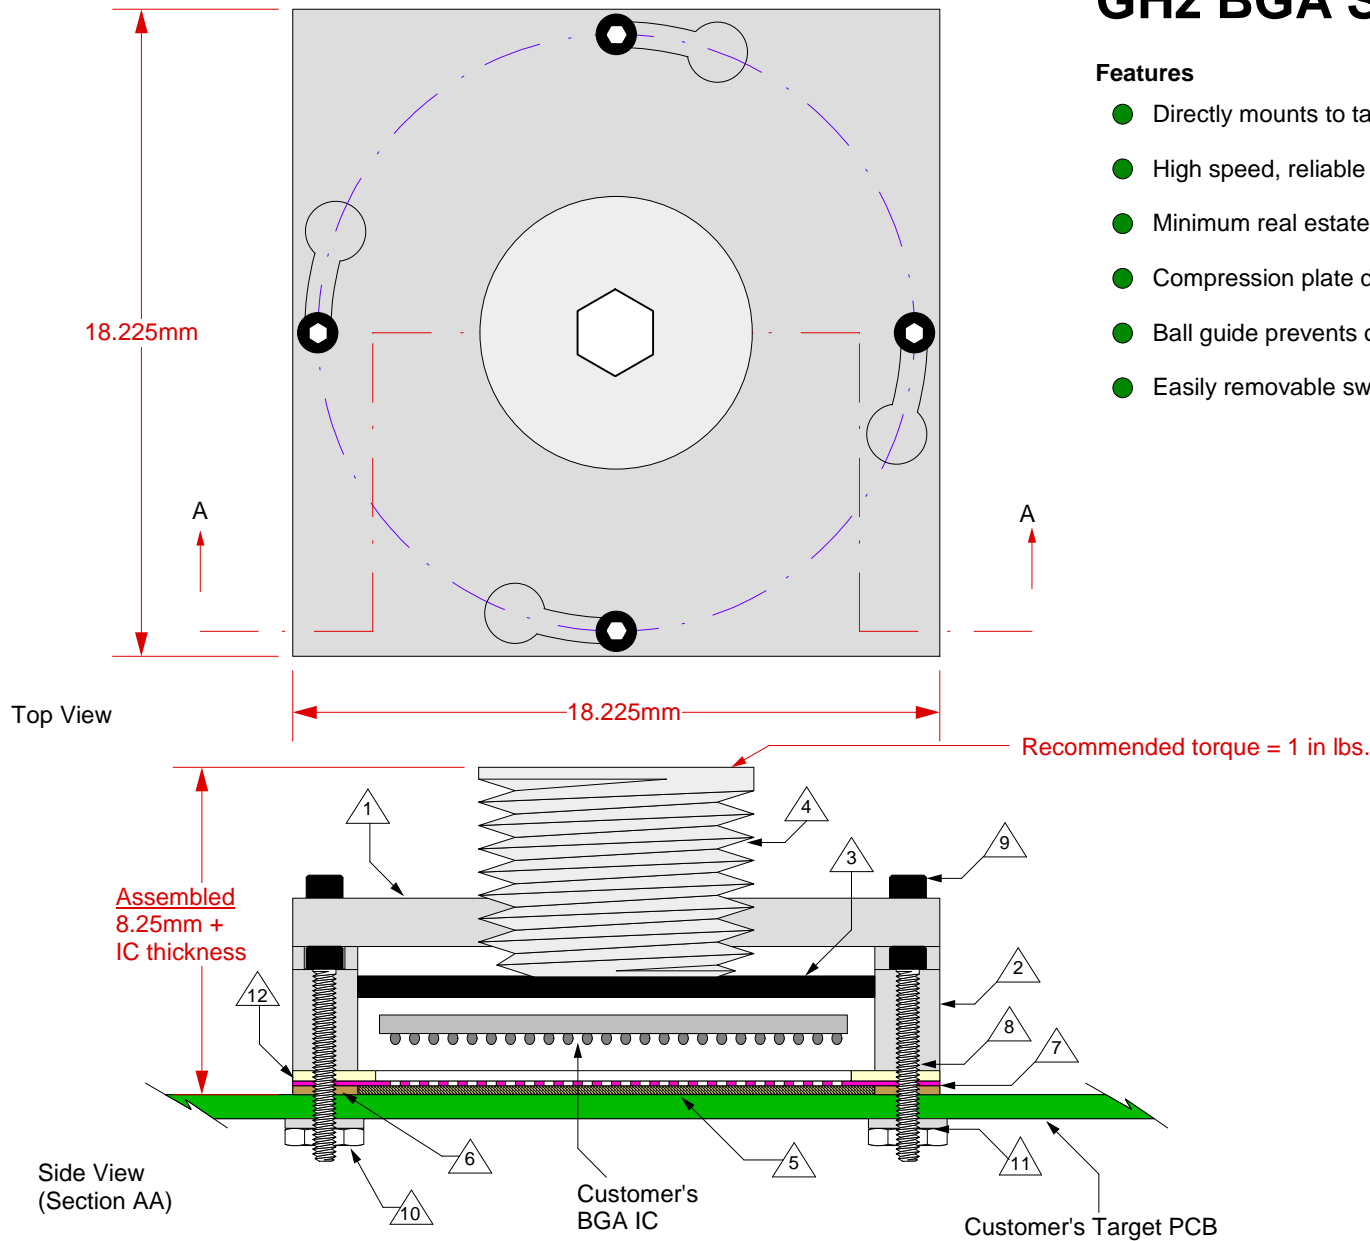

- | | |
|----|----------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Socket Lid: Black anodized Aluminum.
Thickness = 2.5mm. |
| 2 | Socket base: Black anodized Aluminum.
Thickness = 5mm. |
| 3 | Compression Plate: Black anodized Aluminum.
Thickness = 2.5mm. |
| 4 | Compression screw: Clear anodized Aluminum.
Thickness = 5mm, Hex socket = 5mm. |
| 5 | Elastomer: 40 micron dia gold plated brass filaments arranged symmetrically in a silicone rubber (63.5 degree angle).
Thickness = 0.75mm. |
| 6 | Elastomer Guide: Non-clad FR4.
Thickness = 0.725mm. |
| 7 | Ball Guide: Kapton polyimide. |
| 8 | Socket base screw: Socket head cap, Alloy steel with black oxide finish, 0-80 fine thread, 9.525mm long. |
| 9 | Socket lid screw: Socket head cap, Alloy steel with black oxide finish, 0-80 fine thread, 4.76mm long. |
| 10 | Socket base nut: 18-8 Stainless steel, 0-80 fine thread. |
| 11 | Nylon washer: 1.73mm ID; 4.78mm OD
0.64mm thickness. |
| 12 | IC guide: Torlon |

SG-BGA-6373 Drawing

Status: Released

Scale: -

Rev: B



© 2012 IRONWOOD ELECTRONICS, INC.
Tele: (952) 229-8200
www.ironwoodelectronics.com

Drawing: S. Huang


Date: 12/20/2012

File: SG-BGA-6373 Dwg.mcd

Modified: 04/16/14, DH

All tolerances: ± 0.125 mm (unless stated otherwise). Materials and specifications are subject to change without notice.

***Note: BGA pattern is *not* symmetrical with respect to the mounting holes.**

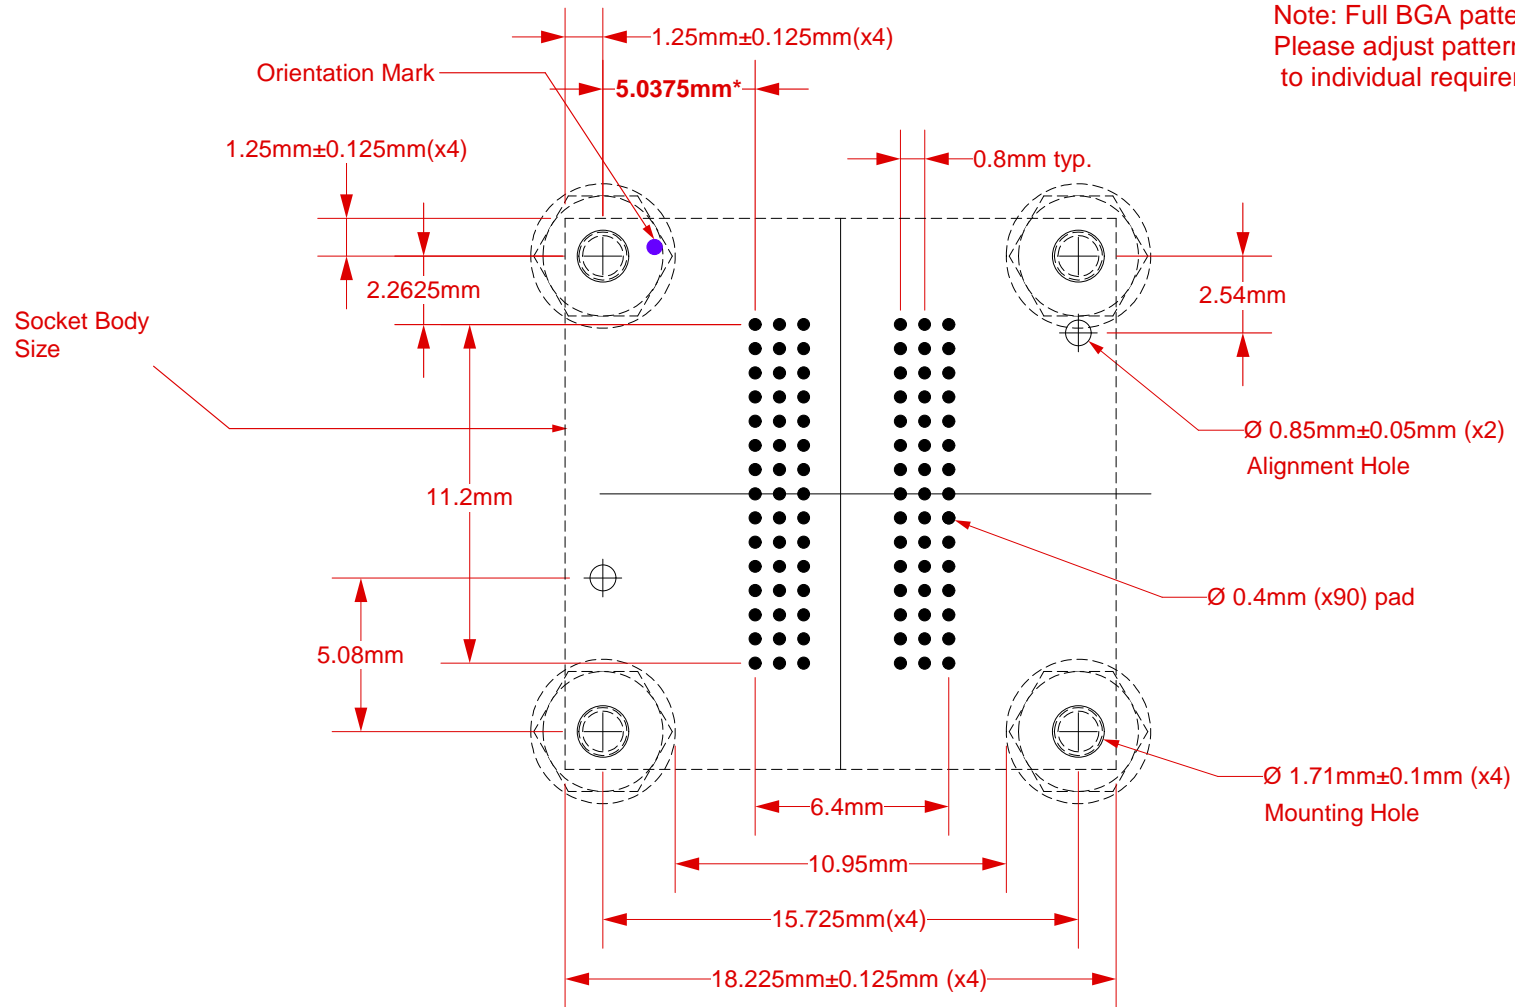


Target PCB Recommendations




- Total thickness: 1.6mm min.
- Plating: Gold or Solder finish
- PCB Pad height: Same or higher than solder mask

NOTE: backing plate may be required based on end user's application



Recommended PCB Layout Tolerances: ±0.025mm [±0.001"] unless stated otherwise.

	SG-BGA-6373 Drawing	Status: Released	Scale: 4:1	Rev: B
	© 2012 IRONWOOD ELECTRONICS, INC. Tele: (952) 229-8200 www.ironwoodelectronics.com	Drawing: S. Huang		Date: 12/20/2012
		File: SG-BGA-6373 Dwg.mcd		Modified: 04/16/14, DH

Compatible BGA Spec

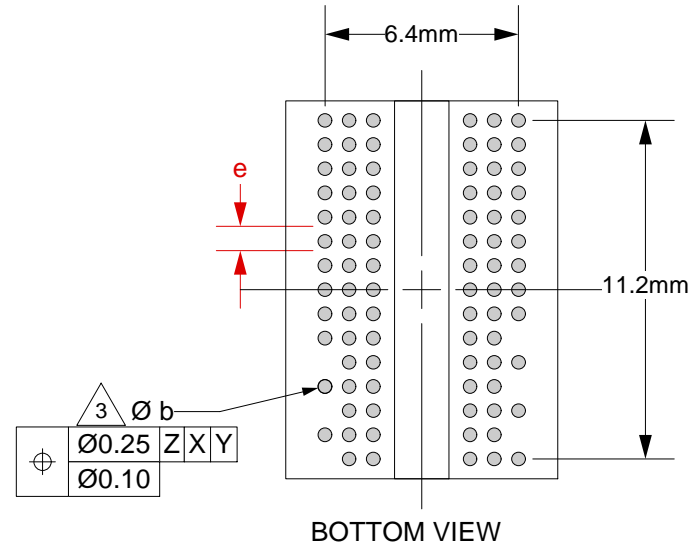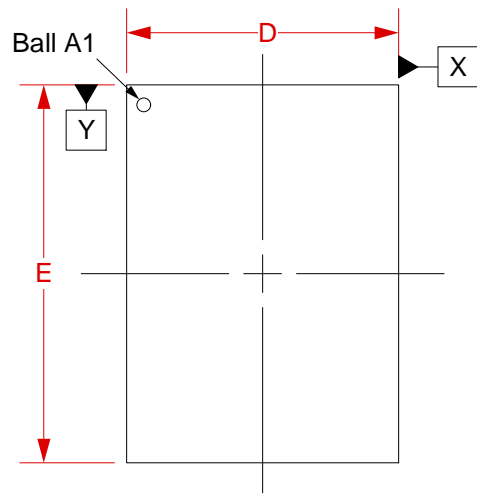


TOP VIEW

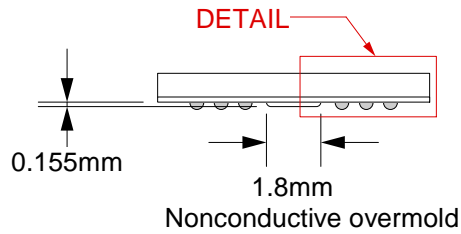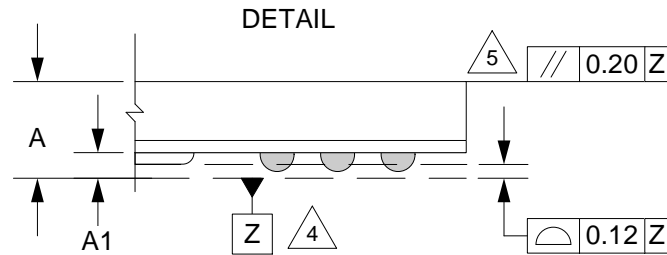


- 1 Dimensions are in millimeters.
- 2 Interpret dimensions and tolerances per ASME Y14.5M-1994.
- 3 Dimension b is measured at the maximum solder ball diameter, parallel to datum plane Z.
- 4 Datum Z (seating plane) is defined by the spherical crowns of the solder balls.
- 5 Parallelism measurement shall exclude any effect of mark on top surface of package.


DIM	MIN	MAX
A		1.2
A1	0.25	
b		0.45
D	8.90	9.10
E	12.4	12.6
e	0.80 BSC	

Array 9x15

 <p>© 2012 IRONWOOD ELECTRONICS, INC. Tele: (952) 229-8200 www.ironwoodelectronics.com</p>	SG-BGA-6373 Drawing	Status: Released	Scale: 4:1	Rev: B
	Drawing: S. Huang		Date: 12/20/2012	
	File: SG-BGA-6373Dwg.mcd		Modified: 04/16/14, DH	

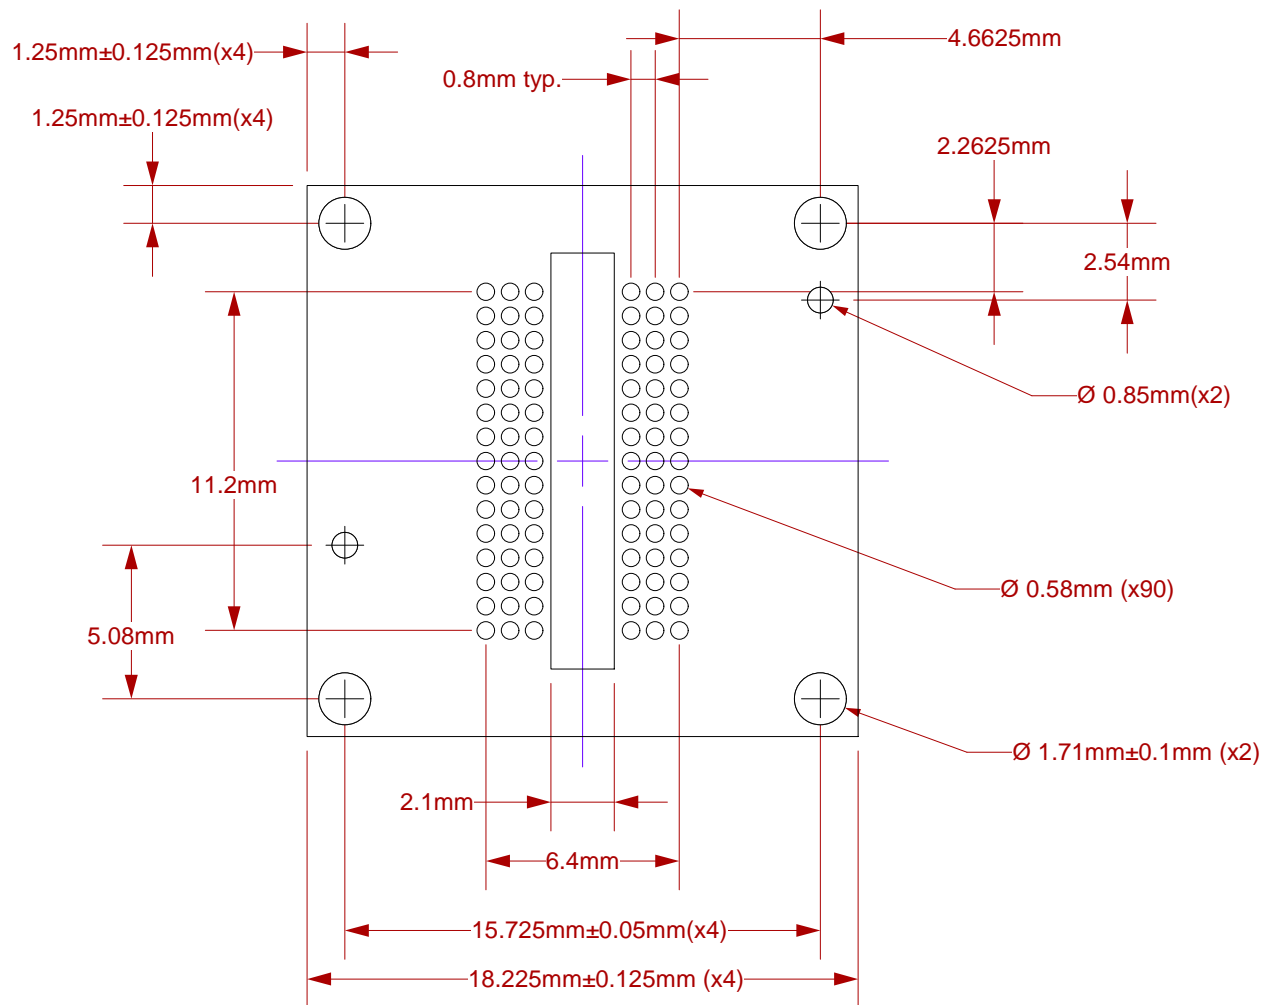

Description: Ball Guide

	© 2012 IRONWOOD ELECTRONICS, INC. Tele: (952) 229-8200 www.ironwoodelectronics.com	Status: Released	Scale: 4:1	Rev: B
		Drawing: S. Huang		Date: 12/20/2012
		File: SG-BGA-6373 Dwg.mcd		Modified: 04/16/14, DH

All tolerances: $\pm 0.125\text{mm}$ (unless stated otherwise). Materials and specifications are subject to change without notice.