


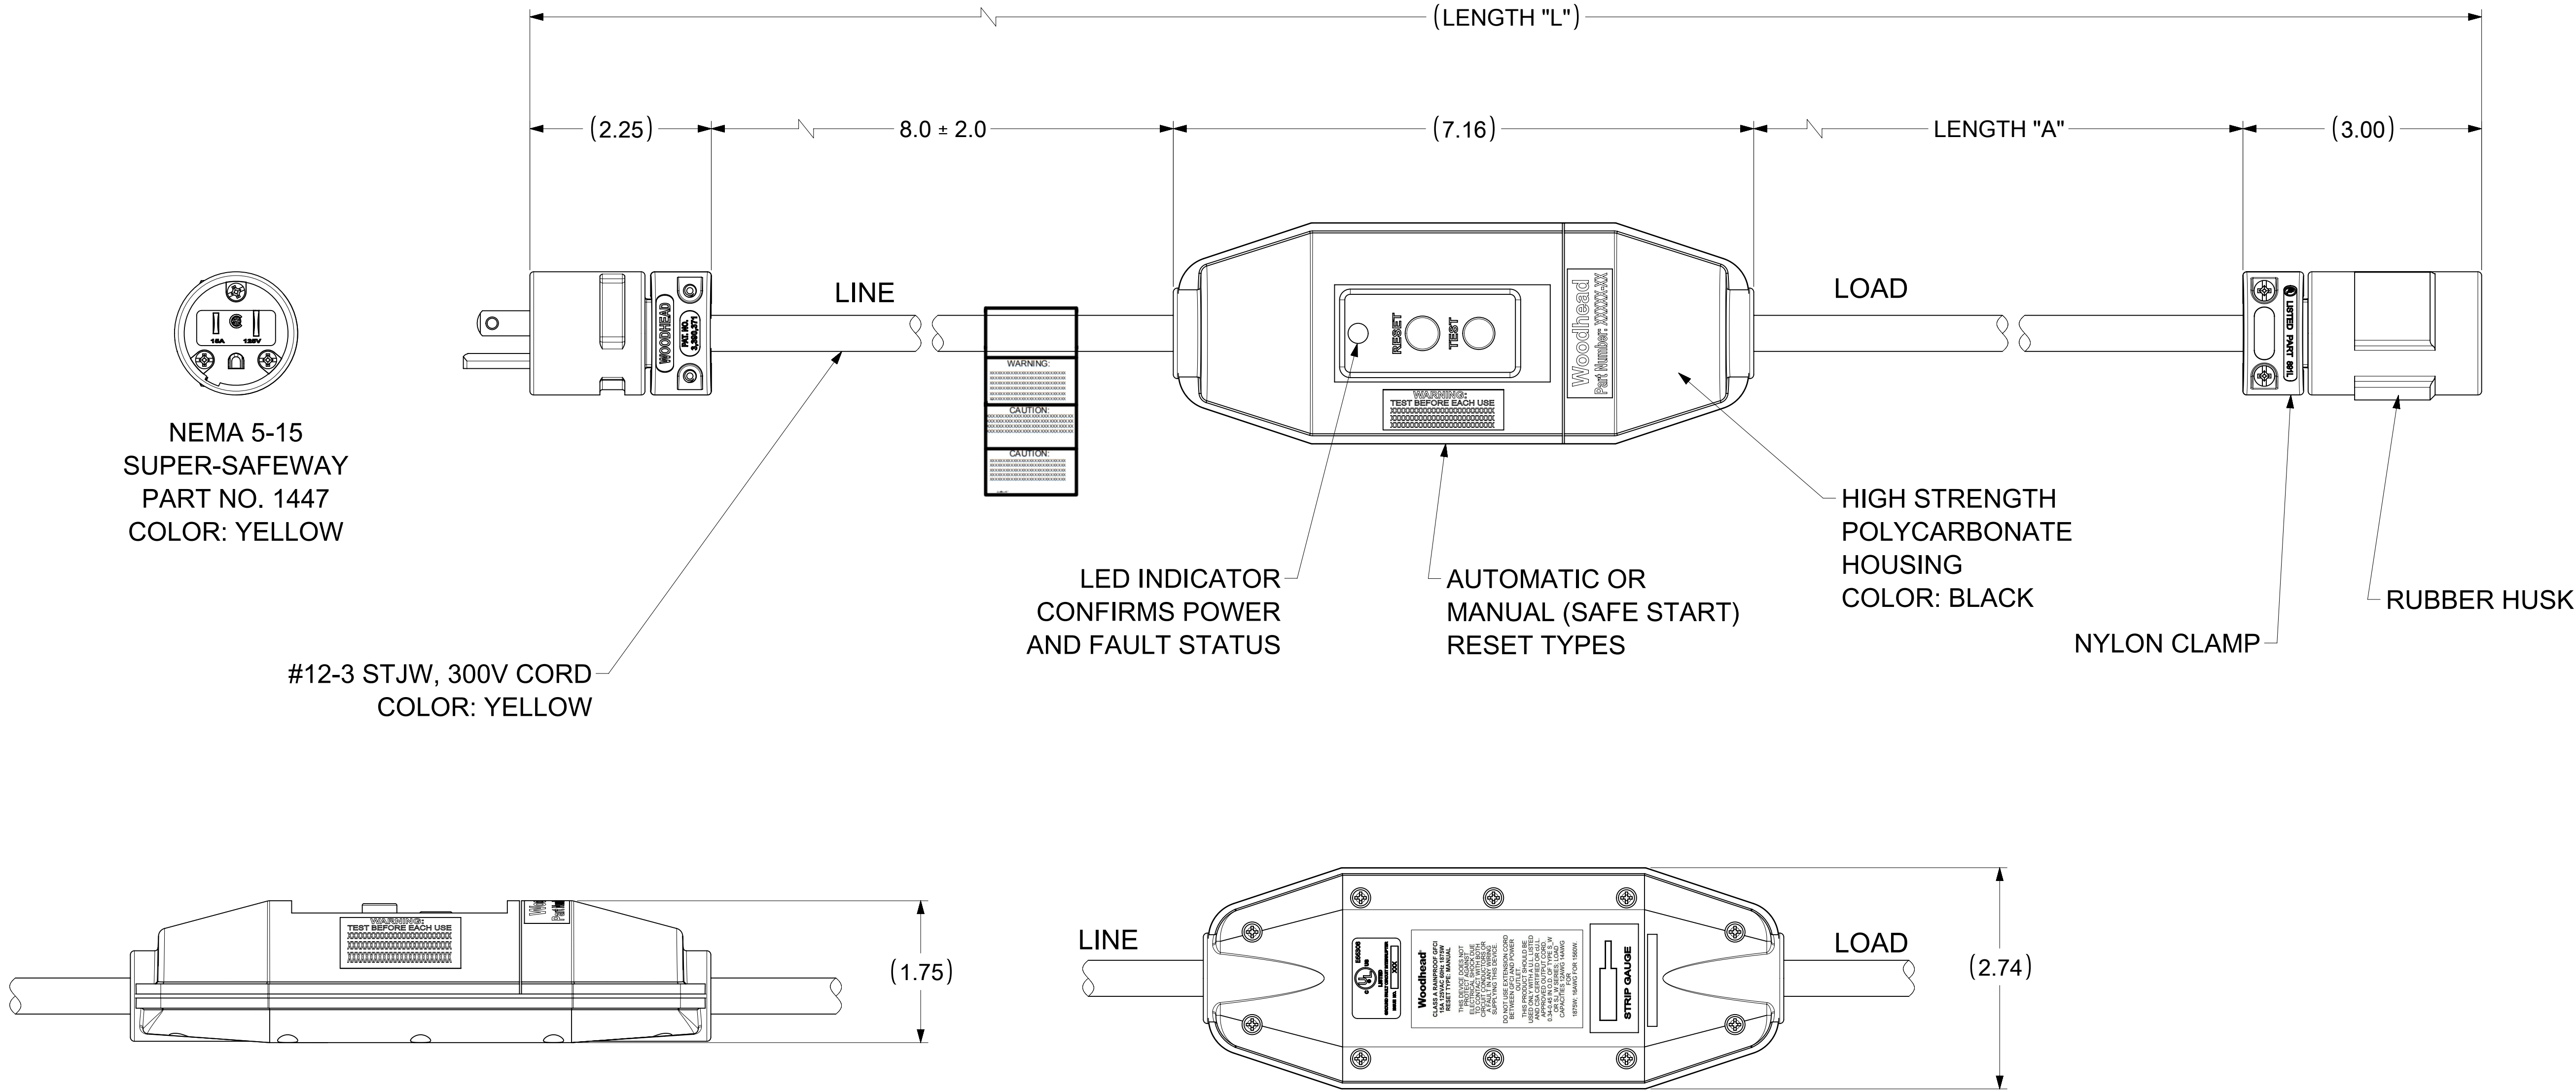

TECHNICAL:
LISTED: cULus
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530043	15051-1A	2 FT 7 IN	1 FT ± 1 IN	AUTO
1301530052	15051-6A	7 FT 7 IN	6 FT ± 2 IN	AUTO
1301530046	15051-25A	26 FT 7 IN	25 FT ± 2 IN	AUTO
1301530049	15051-50A	51 FT 7 IN	50 FT ± 4 IN	AUTO
1301530044	15051-1M	2 FT 7 IN	1 FT ± 1 IN	MANUAL
1301530053	15051-6M	7 FT 7 IN	6 FT ± 2 IN	MANUAL
1301530047	15051-25M	26 FT 7 IN	25 FT ± 2 IN	MANUAL
1301530050	15051-50M	51 FT 7 IN	50 FT ± 4 IN	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: MIGRATION TO ECTR/NX				molex			
	DIMENSION UNITS	SCALE								
$\frac{F_A}{F_C} = 0$	INCH	NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)				120V 15A INLINE GFCI W/ 1447 & 1547 NEMA 5-15			
$\frac{F_C}{F_P} = 0$										
$\frac{F_P}{F_D} = 0$			ANGULAR TOL ± 0.5°				PRODUCT CUSTOMER DRAWING			
DIVISIONAL SYMBOLS	4 PLACES	±	INITIAL REVISION: DRWN: HRUIZ01 2013/02/06 APPR: JFMURPHY 2015/04/20				DOCUMENT NUMBER			
	3 PLACES	±					SD-130153-015			
	2 PLACES	± 0.13					DOC TYPE DOC PART REVISION			
	1 PLACE	± 0.25					PSD 001 A1			
	0 PLACES	±					MATERIAL NUMBER CUSTOMER SHEET NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING		D-SIZE		130153	
							SEE TABLE		GENERAL MARKET	
									1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/02	16:39:36
-----------------	----	--------------	------------	----------