49F/49FA RELAY SOCKET



CHARACTERISTICS

Ambient temperature :	-40 ˚C to 70˚C
Rated voltage :	300VAC
Rated current :	10A（per pole）
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PBT V0 (UL)
Contacts spring material :	QSn6.5-0.1
Retainer :	non-available
White plastic tag :	non-available

Applicable relay type:


49F type is suitable for HF49F(JZC-49F).

49FA type is suitable for HF49FA (JZC-49FA).

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm

Outline Dimensions

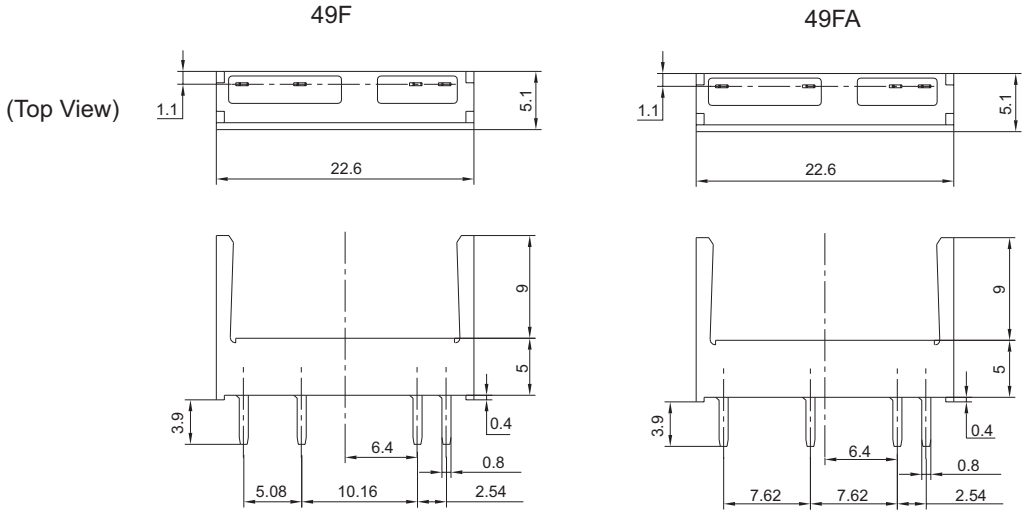

PCB Layout

