

PCB Layout

Notes:



Material and finish:

Contact: Brass
 Gold over 30~80u" nickel plating
 Insulation: PA9T UL94-V0, color black

Specifications:

Current rating: 3.0A
 Contact resistance: 20mΩ Max.
 Withstanding Voltage: 1000V AC/DC
 Insulation resistance: 1000MΩ Min.
 Operating temperature: -40°C to +105°C

Tape & Reel packaging (with Pick and Place Cap) 250pcs per reel

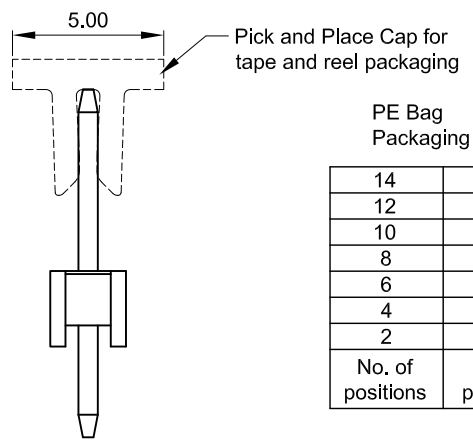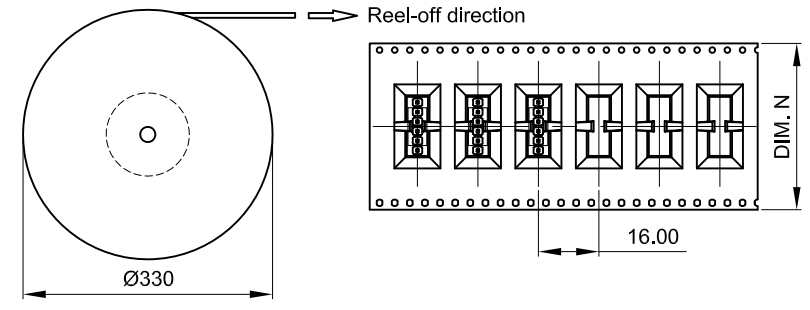

PE Bag Packaging Q'ty

14	500
12	500
10	500
8	500
6	1000
4	1000
2	1000
No. of positions	Q'ty per bag

Tube Packaging Q'ty

14	16
12	19
10	22
8	28
6	38
4	57
2	114
No. of positions	Q'ty per tube

129438	129431	129424	129417	129410	129403	14	35.56	33.02	56	10.00
129437	129430	129423	129416	129409	129402	12	30.48	27.94	56	10.00
129436	129429	129422	129415	129408	129401	10	25.40	22.86	44	10.00
129435	129428	129421	129414	129407	129400	8	20.32	17.78	44	10.00
129434	129427	129420	129413	129406	129399	6	15.24	12.70	32	10.00
129433	129426	129419	129412	129405	129398	4	10.16	7.62	24	10.00
129432	129425	129418	129411	129404	129397	2	5.08	2.54	24	7.00
Id-Nr. PE Bag 10u" gold plating	Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. PE Bag 0.8u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. N	DIM. P

Information:

Tolerances

X: ±0.50 X*: ±10°
 X.X: ±0.40 X.X*: ±5°
 X.XX: ±0.25 X.XX*: ±3°



Scale 4:1

For further information about I. D. number see manufacturing document

All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using

Subject to modification without prior notice. Drawing will not be updated.

Designation
2.54mm Vertical Single Row Header THR



129396

ERNI Asia Holding
 www.erni.com

A		13-08-2013	
Rev.		Date	129396.DWG