4840, solder terminal, Socket, 5.9 mm, 2-pole, DC Plug/Socket






Description

- Solder terminal :
- Screw-on mounting , from rear-side Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight


Technical Data

Diameter	5.9 mm / 3.0 mm / 1.05 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal silver plated
Ratings DC	2A / 13.5VDC	Mounting	Screw-on mounting
Dielectric Strength	500 VDC		wall thickness max. 3.0mm
Insulation Resistance	> 100 MΩ @ 500 VDC	Style	straight
		Lifetime	5000 Insertions

Dimensions

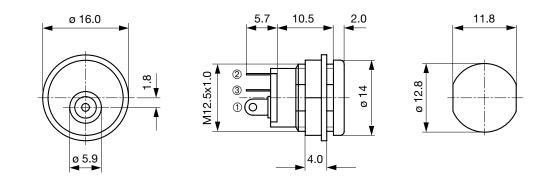

Diagrams





Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.9	2-pole	solder terminal	4840.2220

Packaging unit 250 Pcs

Mating Inlets/Plugs

Category / Description

DC Plug/Socket Overview complete



4840, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.1220
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5220
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5221
DC Plug/Socket further types to 4840.2220	