ADVANCE DATA SHEET

SKY77435 Front-End Module for WCDMA / HSDPA / HSUPA (Tx 1710-1770 MHz), (Rx 2110-2170 MHz)

Applications

- Digital cellular (WCMDA) handsets

Features

- High Speed Downlink Packet Access (HSDPA)
- High Speed Uplink Packet Access (HSUPA)
- Low quiescent current
  - 20 mA
- Low current consumption
  - 530 mA
- Integrated Power Detector
- 16-pad package
- Small profile
  - 7 mm x 4 mm x 1.1 mm
- Low voltage
  - 3.1 V–4.45 V
- Digital enable pad
- Highly integrated, user friendly solution
- InGaP HBT
- Integrated interstage filter and duplexer
- Requires few external components

NEW Skyworks Green™ products are lead (Pb)-free, RoHS (Restriction of Hazardous Substances)-compliant, conform to the EIA/EICTA/JEITA Joint Industry Guide (JIG) Level A guidelines, and are free from antimony trioxide and brominated flame retardants.

Description

The SKY77435 Front-End Module (FEM) is a fully matched, 16-pad surface mount module developed for WCDMA applications. Small and efficient, this WCDMA FEM integrates the interstage filter, the input matching, the power amplifier, the output matching, the power detection, and the duplexer into a single 7 mm x 4 mm x 1.1 mm package.

The SKY77435 meets the stringent spectral requirements of HSDPA standards up to 25.2 dBm output power. The FEM incorporates an InGaP HBT PA and contains circuitry to optimize power detector performance. Different control pads are available to enhance the performance of the FEM at different power levels.

Integration of the RF front-end greatly simplifies the design of the handset radio as all critical matching between the interstage filter, PA, power detection, and duplexer is optimized within the module. By optimizing the efficiency of the InGaP HBT PA MMIC and reducing the RF loss between the integrated components, this FEM achieves current as low as 450 mA at maximum output power (25.2 dBm) that significantly improves the talk time of the WCDMA handset. This small package uses Skyworks' low cost, multi-laminate substrate technology and is approximately half the size of individually packaged component solutions. The SKY77435 front-end module can save handset designers significant board space and design-cycle time.

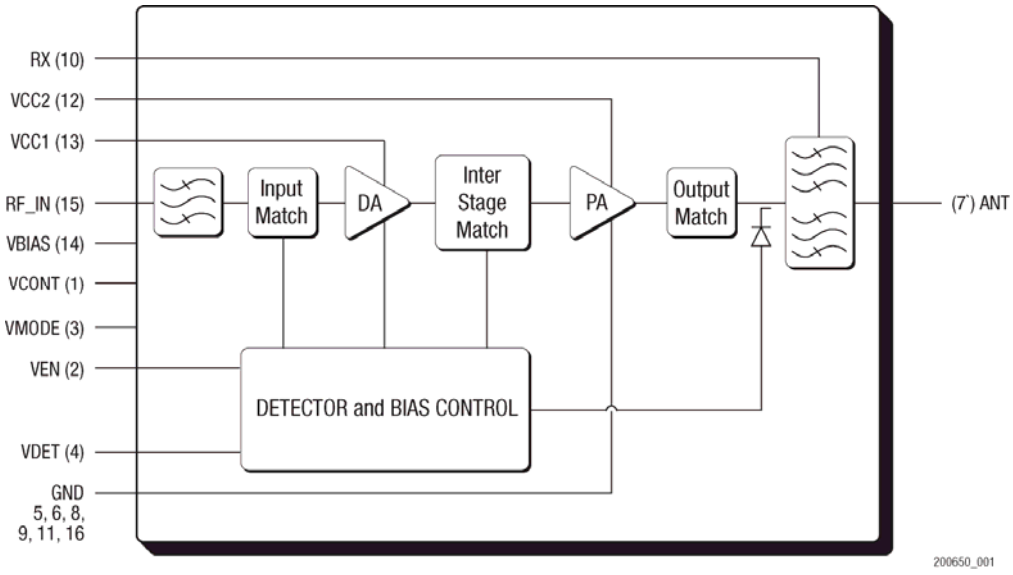


Figure 1. Functional Block Diagram

Electrical Specifications

The following tables list the electrical characteristics of the SKY77435 Front-End Module for WCDMA. Table 1 lists the absolute maximum ratings and Table 2 specifies the recommended operating conditions necessary to achieve the electrical performance listed in Table 3. Table 4 through Table 7 defines the standard test configurations for WCDMA, HSDPA, and HSUPA modes. Table 8 provides specifications for Power Detection. Table 9 and Table 10 specifies the Nominal Duplexer Performance for Band IV and Band X, respectively..

Table 1. Absolute Ratings [1]

Parameter		Symbol	Minimum	Nominal	Maximum	Unit
RF Input Power		P_{IN}	—	—	10.0	dBm
Supply Voltages	No RF	V_{CC1}, V_{CC2}, V_{BIAS}	—	3.4	6.0	Volt
	With RF		—	3.4	4.7	Volt
Bias Control Voltage		V_{CONT}	—	—	2.7	Volt
Mode Control Voltage		V_{MODE}	—	—	3.0	Volts
Enable Control Voltage		V_{EN}	—	—	3.0	Volt
Temperatures	Operating	T_{CASE}	–20	+25	+110	°C
	Storage	T_{STG}	–55	—	+125	

[1] No damage assuming only one parameter at a time is set to limit with all other parameters set at nominal values.

Table 2. Recommended Operating Conditions

Parameter		Symbol	Minimum	Nominal	Maximum	Unit
Tx Channel Center Frequency		F_{Tx}	1712.4	1740.0	1767.6	MHz
Rx Channel Center Frequency		$F_{Rx} = F_{Tx} + 400$ MHz	2112.4	2140.0	2167.6	MHz
Supply Voltages		V_{CC1}, V_{CC2}	3.1 [1]	3.4	4.45	Volt
		V_{BIAS}	3.1	3.4	4.45	
Bias Control Voltage		V_{CONT}	0.5	—	1.9	Volt
Mode Control	Low Power Mode (LPM)	V_{MODE_L}	1.5	1.8	2.85	Volt
	High Power Mode (HPM)	V_{MODE_H}	0.0	0.0	0.56	
Enable Control Setting	Disabled	V_{EN_L}	0.0	0.0	0.56	Volt
	Enabled	V_{EN_H}	1.5	1.8	2.85	
Operating Temperature		T_{CASE}	–20	+25	+85	°C

1 For V_{CC} < 3.4 V, maximum output power = P_{MAX2}

Table 3. Electrical Specifications for Nominal Operating Conditions [1]

Parameter			Symbol	Conditions	Minimum	Typical	Maximum	Unit
Linear Output Power			P_{MID}	HPM, LPM $V_{CC} \geq 3.1$ V	10.0	—	—	dBm
			P_{MAX2}	HPM $V_{CC} \geq 3.1$ V	24.4	—	—	
			P_{MAX1}	HPM	25.2	—	—	
Gain		Mid Power	G_{MID}	LPM P_{MID}	11.0	—	23.0	dB
		High Power	G_{HIGH}	V_{CC} = 3.4 V P_{MAX1} T_{CASE} = 25 °C	19.5	—	28.5	
Gain Flatness Over Frequency			ΔG_{PWR}	Each Tx Frequency	–2.5	—	2.5	dB
Current Consumption	Band IV	Mid Power	I_{CC}	LPM P_{MID}	—	—	50	mA
		High Power		P_{MAX1}	—	—	530	
	Band X	Mid Power		LPM P_{MID}	—	—	50	
		High Power		P_{MAX1}	—	—	530	
Power Added Efficiency	Band IV	Mid Power	PAE_MID	LPM P_{MID}	5.4	—	—	%
		High Power	PAE_HIGH	P_{MAX1}	18.4	—	—	
	Band X	Mid Power	PAE_MID	LPM P_{MID}	5.4	—	—	
		High Power	PAE_HIGH	P_{MAX1}	18.4	—	—	
Error Vector Magnitude			EVM	—			5	%
Adjacent Channel Leakage Ratio [2]		5 MHz	ACL1	—	—	–40	—	dBc
		10 MHz	ACL2		—	–54	—	
Harmonic Suppression		Second	$2f_0$	P_{MAX1}	—	—	–33	dBm
		Third	$3f_0$		—	—	–33	
Tx Noise Power in Rx Band			NRx1	P_{MAX1} 869–894 MHz RBW = 3.84 MHz	—	—	–61	dBm
			NRx2	P_{MAX1} 1575.42 MHz RBW = 2.046 MHz	—	—	–100	
			NRx3	P_{MAX1} 1930–1990 MHz RBW = 3.84 MHz	—	—	–61	
			NRx4	P_{MAX1} 2110–2170 MHz RBW = 3.84 MHz	—	—	–114	
			NRx5	P_{MAX1} 2400–2483.5 MHz RBW = 1.0 MHz	—	—	–90	

Table 3. [continued] **Electrical Specifications for Nominal Operating Conditions [1]**

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Unit
Input Voltage Standing Wave Ratio	VSWR	—	—	—	2:1	
Quiescent Current	I_{CQ}	—	—	—	18	mA
Control Current	I_{BA}	—	—	—	1	mA
Digital Enable Current	I_{EN}	—	—	—	1	mA
Leakage Current	I_{LEAK}	V_{CC1}, V_{CC2}, V_{BIAS} = 4.45 V V_{CONT} = 0 V V_{EN} = 0.2 V V_{MODE_H} = 0 V	—	—	20	µA
Stability (spurious output)	S	8:1 VSWR, all phases	—	—	–65	dBc
Ruggedness [3]	Ru	—	10:1	—	—	

[1] Unless otherwise specified: V_{CC} = 3.4 V, Temp. = 25 °C.

[2] For STC1 WCDMA, STC2 HSDPA, and STC3 HSUPA modes test conditions. For STC4 HSUPA, power back off = 2.6 dB.

[3] ACLR is specified per 3GPP as the ratio of in-band power to adjacent power, both measured in 3.84 MHz bandwidth at specified offsets.

[4] All phases, time = 10 seconds, continuous WCDMA/HSDPA modulated signal.

Table 4. Standard Test Configuration – STC1 WCDMA Mode

Parameter	Level	Spread Code	Spread Factor	I/Q	βc	βd	βhs	βec	βed	Relative Power (dB)
DPCCH	15 kbps	0	256	Q	8/15	—	—	—	—	–6.547
DPDCH	60 kbps	16	64	I	—	15/15	—	—	—	–1.087

Table 5. Standard Test Configuration – STC2 HSDPA Mode

Parameter	Level	Spread Code	Spread Factor	I/Q	βc	βd	βhs	βec	βed	Relative Power (dB)
DPCCH	15 kbps	0	256	Q	12/15	—	—	—	—	–7.095
DPDCH	60 kbps	16	64	I	—	15/15	—	—	—	–5.157
HS-DPCCH	15 kbps	64	256	Q	—	—	24/15	—	—	–3.012

Table 6. Standard Test Configuration – STC3 HSUPA Mode

Parameter	Level	Spread Code	Spread Factor	I/Q	βc	βd	βhs	βec	βed	Relative Power (dB)
DPCCH	15 kbps	0	256	Q	8/15	—	—	—	—	–19.391
DPDCH	960 kbps	1	4	I	—	15/15	—	—	—	–13.931
HS- DPCCH	15 kbps	64	256	Q	—	—	8/15	—	—	–19.391
E-DPCCH	15 kbps	1	256	I	—	—	—	10/15	—	–17.338
E-DPDCH	960 kbps	2	4	I	—	—	—	—	71.5/15	–0.371

Table 7. Standard Test Configuration – STC4 HSUPA Mode

Parameter	Level	Spread Code	Spread Factor	I/Q	βc	βd	βhs	βec	βed	Relative Power (dB)
DPCCH	15 kbps	0	256	Q	6/15	—	—	—	—	–12.499
DPDCH	960 kbps	1	4	I	—	15/15	—	—	—	–4.540
HS- DPCCH	15 kbps	64	256	Q	—	—	2/15	—	—	–22.041
E-DPCCH	15 kbps	1	256	I	—	—	—	12/15	—	–6.478
E-DPDCH	960 kbps	2	4	I	—	—	—	—	15/15	–4.425

Table 8. Electrical Specifications for Power Detector

Tx Power Detection						
Characteristic	**Symbol**	**Conditions**	**Minimum**	**Typical**	**Maximum**	**Unit**
Power Detect Range	P_{DET}		0.0	—	26.2	dBm
Detector Output Range	V_{DET}	3 dBm ≤ P_0 ≤ 26.2 dBm	400 (rms)	—	1800 (peak)	mV

Table 9. Nominal Duplexer Performance – Band IV7

Antenna to Rx Parameter							
Characteristic		**Symbol**	**Conditions**	**Minimum**	**Typical**	**Maximum**	**Unit**
Insertion Loss		IL_{Rx}	2110 MHz…2170 MHz	—	—	2.5	dB
Ripple			Each Rx Frequency	–0.5	—	0.5	dB
Attenuation			DC…12750 MHz	20	—	—	dB
		A_{RX1}	390 MHz…410 MHz	40	—	—	
		A_{RX2}	703 MHz…724 MHz	30	—	—	
		A_{RX3}	1055 MHz…1085 MHz	45	—	—	
		A_{RX4}	1310 MHz…1370 MHz	35	—	—	
	Tx Band	A_{RX5}	1710 MHz…1770 MHz	50	—	—	
		A_{RX6}	1910 MHz…1970 MHz	25	—	—	
	Tx + Rx	A_{RX7}	3820 MHz…3940 MHz	35	—	—	
	2Tx + Rx	A_{RX8}	5530 MHz…5710 MHz	35	—	—	
VSWR			—	—	—	2.0:1	
Input			—	—	—	30	dBm
Tx Power @ Rx Port			1710 MHz…1770 MHz P_{MAX1}	—	—	–25	dBm

Table 10. Nominal Duplexer Performance – Band X8

Antenna to Rx Parameter							
Characteristic		**Symbol**	**Conditions**	**Minimum**	**Typical**	**Maximum**	**Unit**
Insertion Loss		IL_{Rx}	2110 MHz…2170 MHz	—	—	2.8	dB
Ripple			Each Rx Frequency	–0.5	—	0.5	dB
Attenuation			DC…12750 MHz	20	—	—	dB
		A_{Rx1}	390 MHz…410 MHz	40	—	—	
		A_{Rx2}	703 MHz…724 MHz	30	—	—	
		A_{Rx3}	1055 MHz…1085 MHz	45	—	—	
		A_{Rx4}	1310 MHz…1370 MHz	35	—	—	
	Tx Band	A_{Rx5}	1710 MHz…1770 MHz	50	—	—	
		A_{Rx6}	1910 MHz…1970 MHz	25	—	—	
	Tx + Rx	A_{Rx7}	3820 MHz…3940 MHz	35	—	—	
	2Tx + Rx	A_{Rx8}	5530 MHz…5710 MHz	35	—	—	
VSWR			—	—	—	2.0:1	
Input			—	—	—	30	dBm
Tx Power @ Rx Port			1710 MHz…1770 MHz P_{MAX1}	—	—	–25	dBm

Evaluation Board Description

The evaluation board is a platform for testing and interfacing design circuitry. To accommodate the interface testing of the SKY77435, the evaluation board schematic and the basic assembly diagram are included for preliminary analysis and design. Figure 2 is a simple schematic of the board assembly in Figure 3.

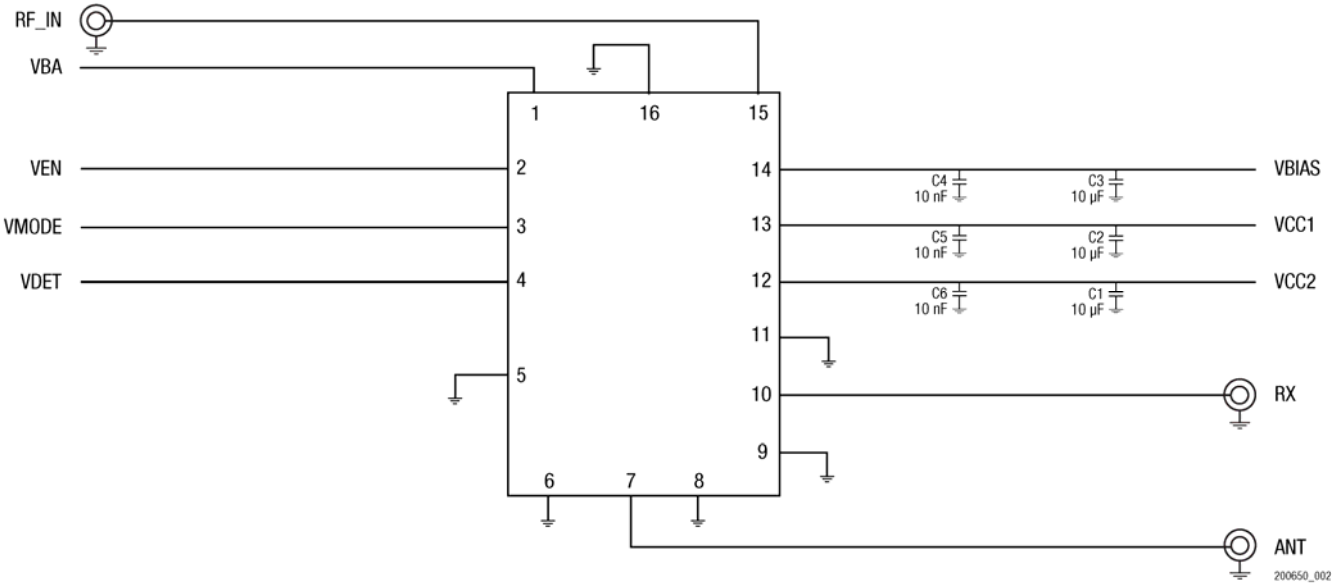


Figure 2. SKY77435 Evaluation Board Schematic Diagram

COMPONENT TABLE		
REF	VALUE	SIZE
C1	10 µF	1206
C2	10 µF	1206
C3	10 µF	1206
C4	10 nF	0402
C5	10 nF	0402
C6	10 nF	0402


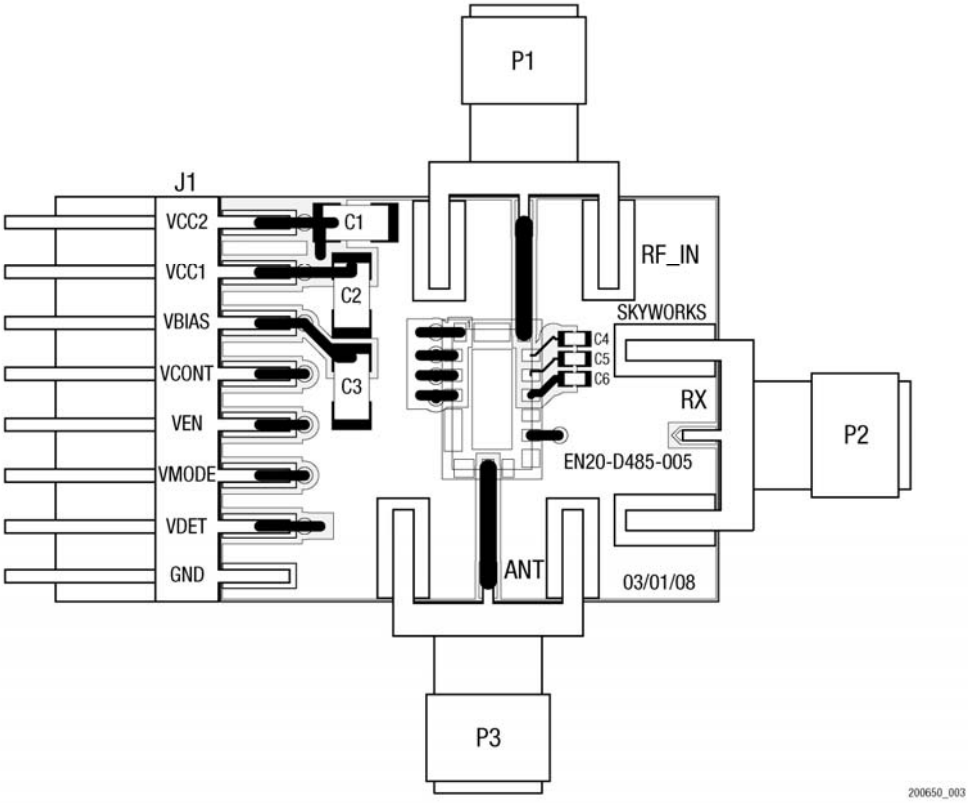


Figure 3. SKY77435 Evaluation Board Assembly Diagram

Package Dimensions


The SKY77435 is a multi-layer laminate base, overmold encapsulated modular package designed for surface-mounted solder attachment to a printed circuit board. Figure 4 is a mechanical drawing of the pad layout for this package. Figure 5 provides a recommended phone board layout footprint for the FEM to help the designer attain optimum thermal conductivity, good grounding, and minimum RF discontinuity for the 50 ohm terminals.

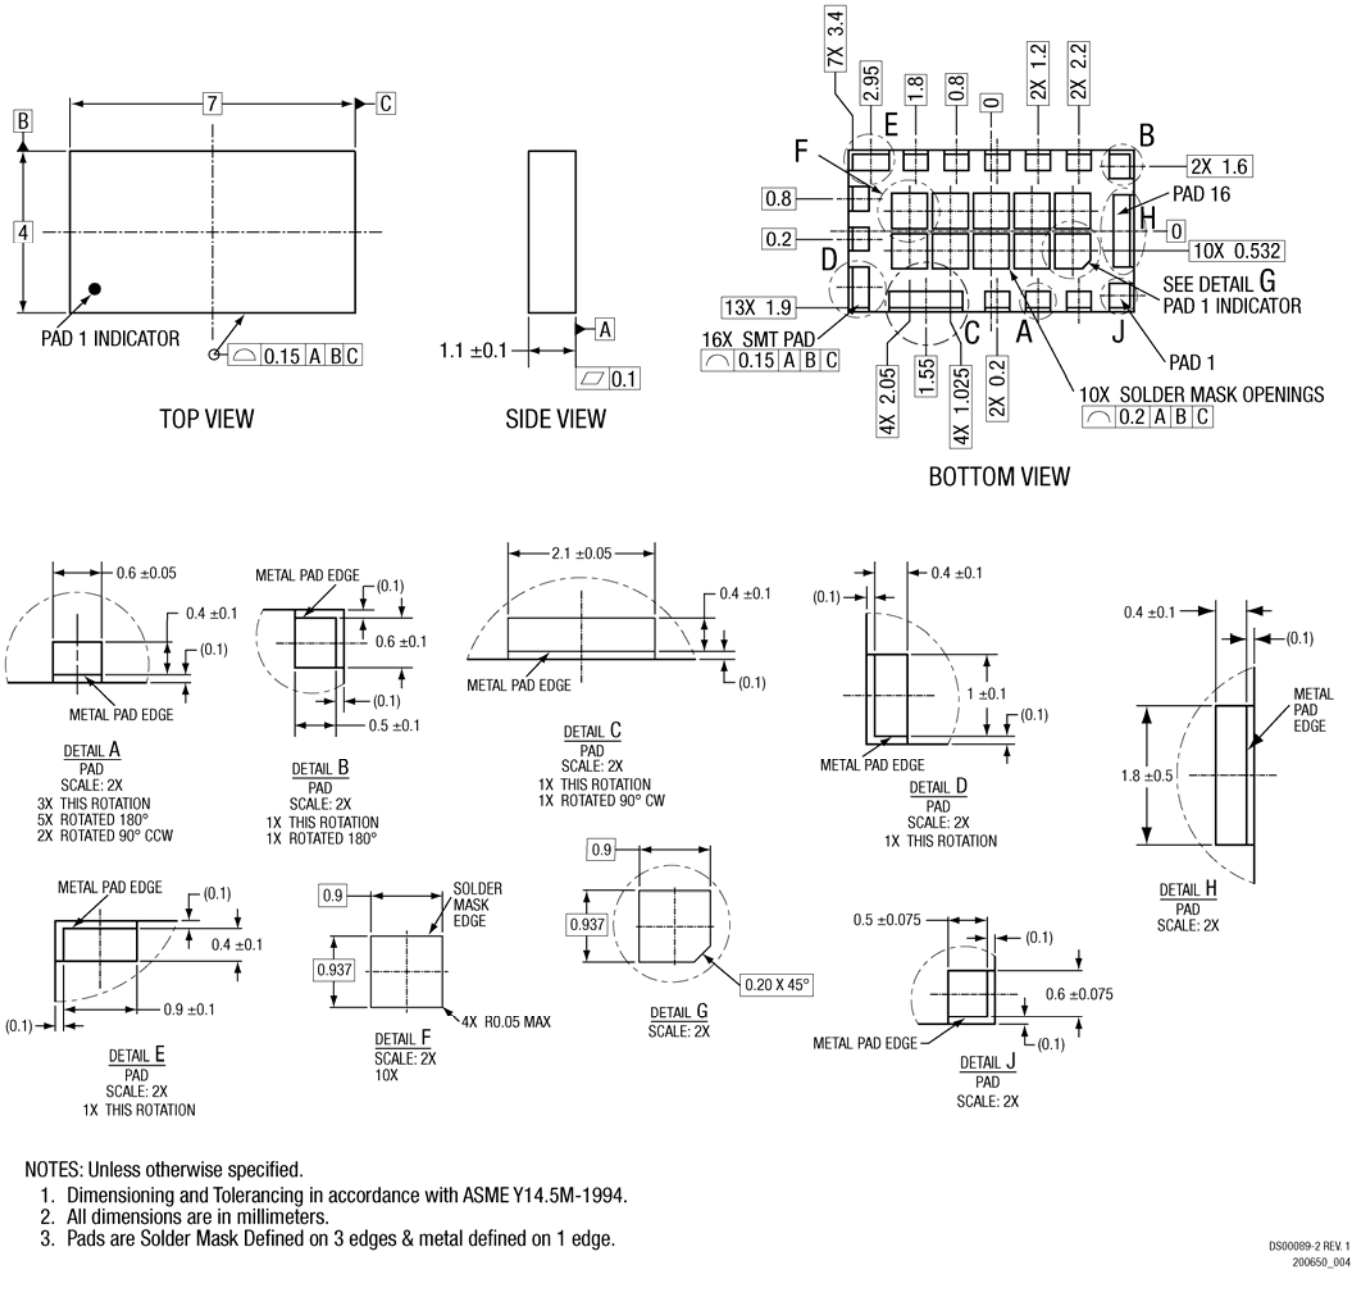


NOTES: Unless otherwise specified.
1. Dimensioning and Tolerancing in accordance with ASME Y14.5M-1994.
2. All dimensions are in millimeters.
3. Pads are Solder Mask Defined on 3 edges & metal defined on 1 edge.

DS00089-2 REV. 1
200650_004


Figure 4. Dimensional Diagram for 7 x 4 x 1.1 mm, 6-Pad Package (All Views) – SKY77435

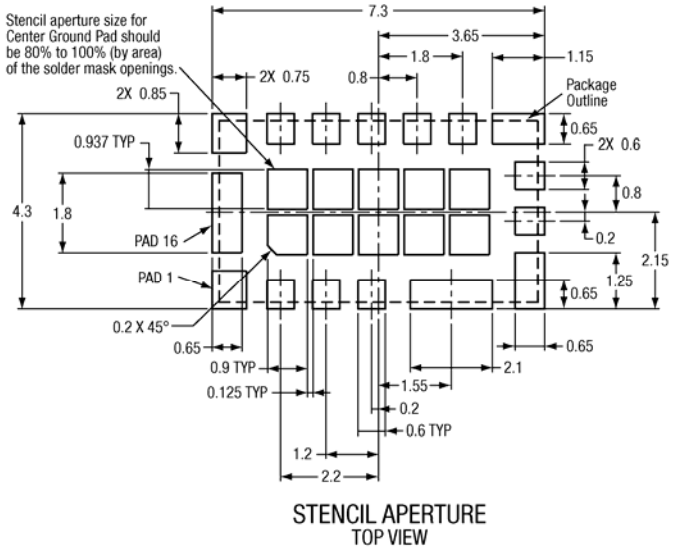

STENCIL APERTURE
TOP VIEW

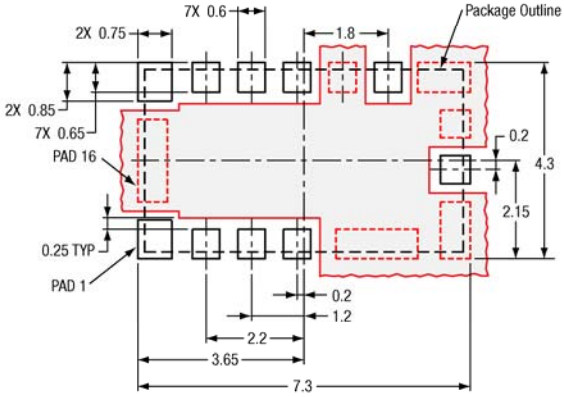

METALLIZATION
TOP VIEW

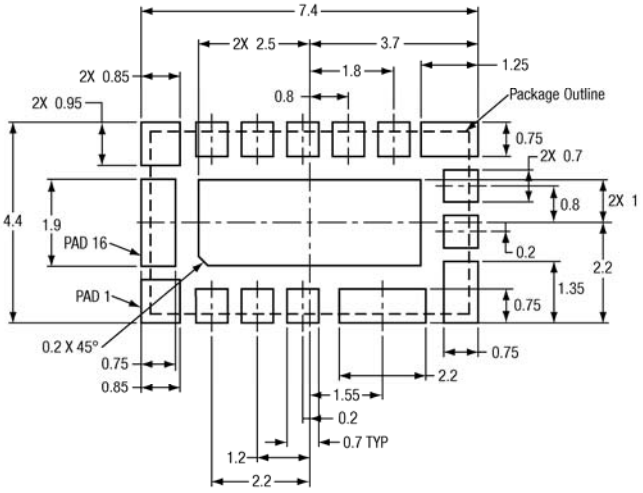

SOLDER MASK OPENING
TOP VIEW

NOTES: UNLESS OTHERWISE SPECIFIED.
1. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.

DS00089-2 REV. 1
200650_005

Figure 5. Phone PCB Layout Footprint for 7 x 4 mm, 16-Pad Package – SKY77435

Package Description

Figure 6 shows each pad name and the pad numbering convention, which starts with pad 1 in the upper left, as indicated and increments counter-clockwise around the package. Figure 7 illustrates typical case markings.

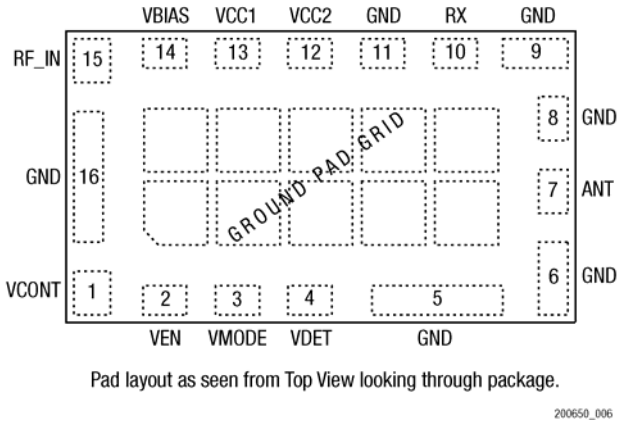


Figure 6. SKY77435 16-Pad Configuration – (Top View)

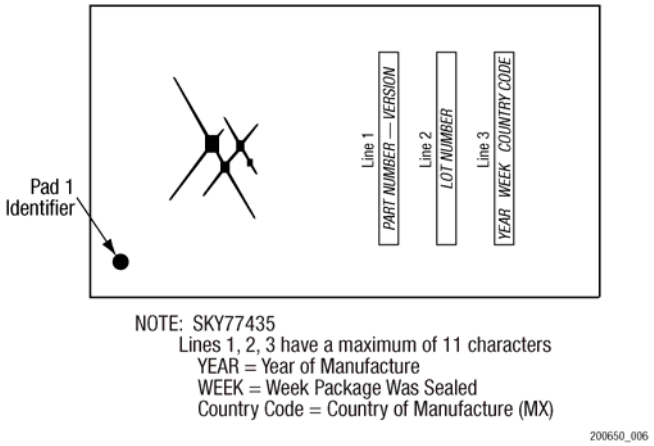


Figure 7. Typical Case Markings (Top View)

Package Handling Information

Because of its sensitivity to moisture absorption, this device package is baked and vacuum-packed prior to shipment. Instructions on the shipping container label must be followed regarding exposure to moisture after the container seal is broken, otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKY77435 is currently qualified for MSL3/260 °C. Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. If the part is attached in a reflow oven, the temperature ramp rate should not exceed 3 °C per second; maximum temperature should not exceed 260 °C. If the part is manually attached, precaution should be taken to insure that the part is not subjected to temperatures exceeding 260 °C for more than 10 seconds. For details on attachment techniques, precautions, and handling procedures recommended by Skyworks, please refer to Skyworks Application Note: *PCB Design and SMT Assembly/Rework,* Document Number 101752. Additional information on standard SMT reflow profiles can also be found in the *JEDEC Standard J–STD–020*.

Production quantities of this product are shipped in the standard tape-and-reel format. For packaging details, refer to Skyworks Application Note: *Tape and Reel – RF Modules,* Document Number 101568.

Electrostatic Discharge Sensitivity (ESD)

To avoid ESD damage, both latent and visible, it is very important that the product assembly and test areas follow the Class 1 ESD handling precautions listed below.

- Personnel Grounding
  - Wrist Straps
  - Conductive Smocks, Gloves and Finger Cots
  - Antistatic ID Badges
- Protective Workstation
  - Dissipative Table Top
  - Protective Test Equipment (Properly Grounded)
  - Grounded Tip Soldering Irons
  - Solder Conductive Suckers
  - Static Sensors
- Facility
  - Relative Humidity Control and Air Ionizers
  - Dissipative Floors (less than 10^9 Ω to GND)
- Protective Packaging and Transportation
  - Bags and Pouches (Faraday Shield)
  - Protective Tote Boxes (Conductive Static Shielding)
  - Protective Trays
  - Grounded Carts
  - Protective Work Order Holders

Ordering Information

Model Number	Manufacturing Part Number	Product Revision	Package	Operating Temperature
SKY77435	SKY77435		MCM 4 x 7 x 1.1 mm	–20 °C…+85 °C

Revision History

Revision	Date	Description
A	December 2, 2008	Initial Release – Advance Information

References

Skyworks Application Note: Tape and Reel – RF Modules, Document Number 101568

Skyworks Application Note: PCB Design and SMT Assembly/Rework, Document Number 101752

JEDEC Standard J–STD–020

© 2008, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, “Breakthrough Simplicity,” DCR, Helios, HIP3, Innovation to Go, Intera, iPAC, LIPA, Polar Loop, and System Smart are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.