

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

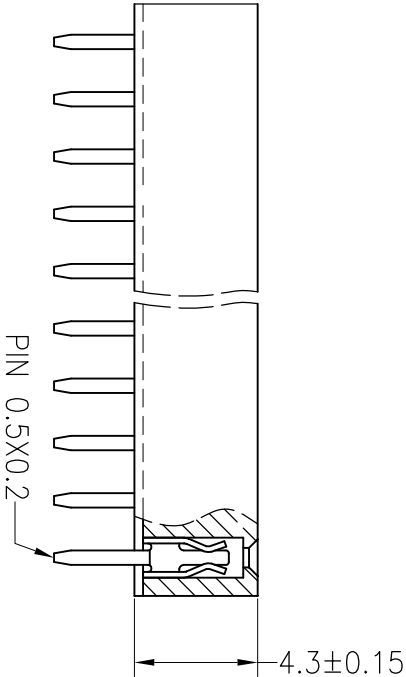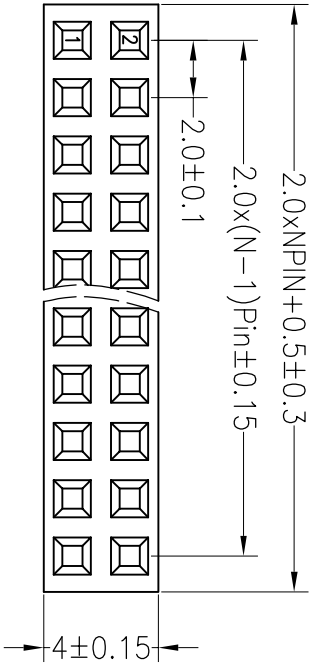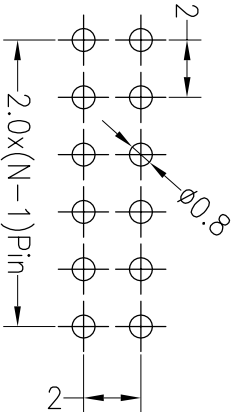

深圳市连盛精密连接器有限公司

PART NO.

FH-00351

TITLE:

2.0FH H4.3mm 2x3pin 180° W4.00

	1	2	3	4	5	6	7	8	9
G	RoHS								
F	SPECIFICATIONS Rated Current:1.5AMP Contact Resistance:20mΩ Max Withstand Voltage:500V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40°c to +105°c								
E	Contact Material:Brass Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)								
D									
C									
B									
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.
1	1	2	3	4	5	6	7	8	9