



1. Mechanical:

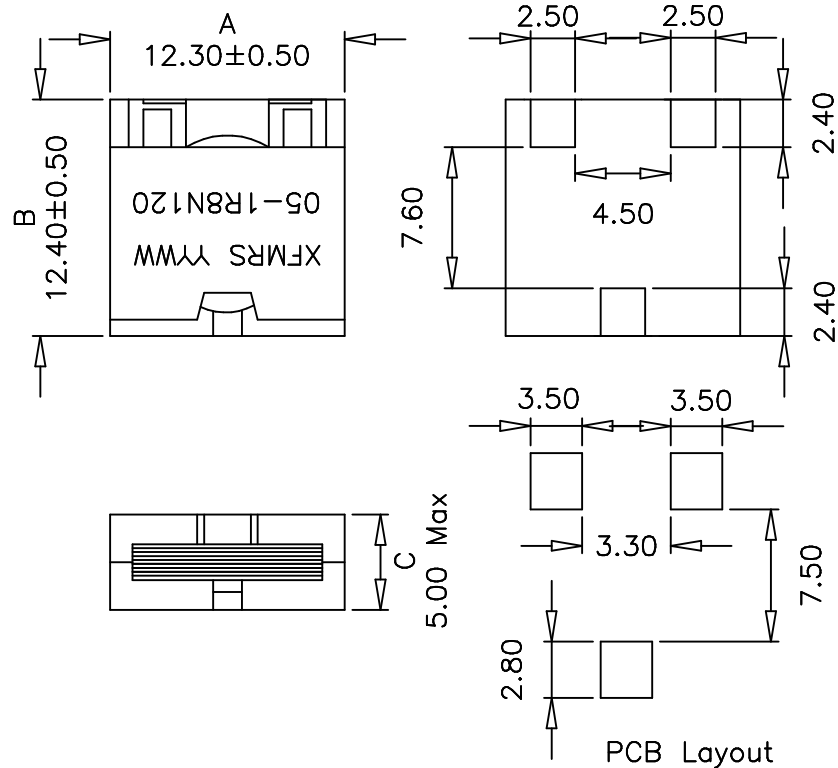

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: $1.8\mu\text{H} \pm 10\%$ @100KHz, 0.25V, ODC

CURRENT: 12.0 ADC Max, OCL DROP BY 15% Max

DC Res.: 6.60mOhms Typ

DOC. REV: A/2

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc		Title: INDUCTORS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in mm	P/N: XF121205-1R8N120		REV. A
	DWN.	李小锋	Dec-19-01
	CHK.	廖玉坤	Dec-19-01
	APP.	Isaiah M	Dec-19-01
SHEET 1 OF 1			