
EVERLIGHT AMERICAS

DATASHEET

SMD ▪ B
EAST16084YA3

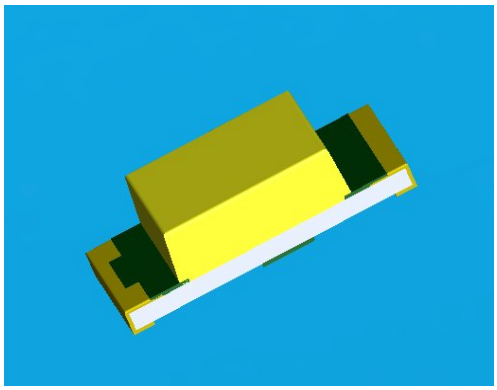

CONFIDENTIAL

Features

- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

R
LifecyclePhase:Developing()
Expired Period: Forever

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInp	Brilliant Orange	Water Clear

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge	ESD_{HBM}	2000	V
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Soldering Temperature	Tsol	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

R
LifecyclePhase:Developing()
Expired Period: Forever

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	14.5	-----	36.0	mcd	I_F=5mA
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	
Peak Wavelength	λp	-----	591	-----	nm	
Dominant Wavelength	λd	588.5	-----	594.5	nm	
Spectrum Radiation Bandwidth	Δλ	-----	15	-----	nm	
Forward Voltage	V_F	1.75	-----	2.35	V	
Reverse Current	I_R	-----	-----	10	μA	V_R=5V

Note:
1.Tolerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm
3. Tolerance of Forward Voltage: ±0.1V

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

R
LifecyclePhase:Developing() Expired Period: Forever

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
L2	14.5	18.0	mcd	I_F =5mA
M1	18.0	22.5		
M2	22.5	28.5		
N1	28.5	36.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
D4	588.5	591.5	nm	I_F =5mA
D5	591.5	594.5		

Bin Range Of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
0	1.75	1.95	V	I_F =5mA
1	1.95	2.15		
2	2.15	2.35		

Note:
1.Tolerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm
3. Tolerance of Forward Voltage: ±0.1V


CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com


R
LifecyclePhase:Developing()
Expired Period: Forever

Typical Electro-Optical Characteristics Curves


Spectrum Distribution

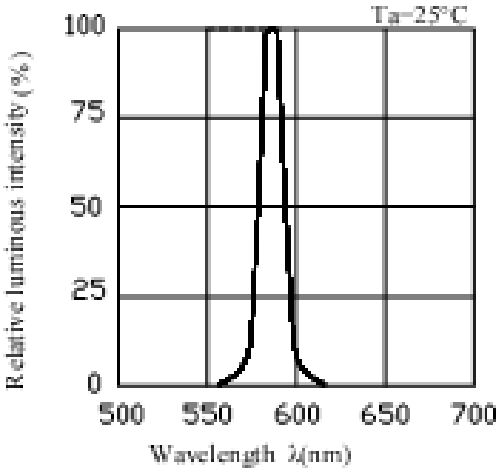


Forward Current vs. Forward Voltage

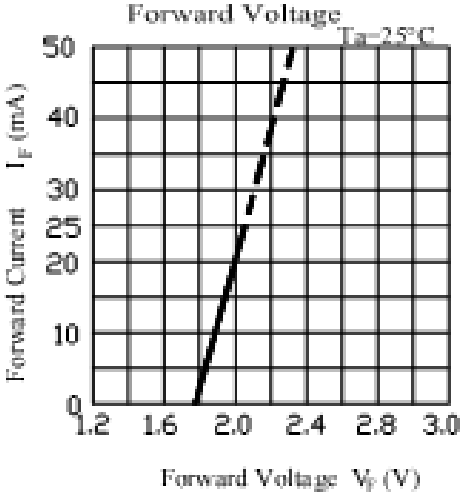


Luminous Intensity vs. Ambient Temperature

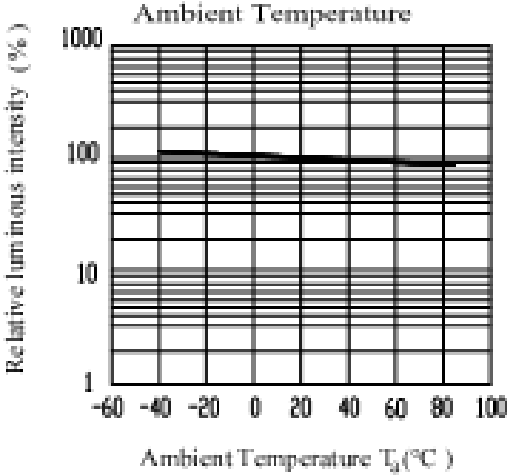


Luminous Intensity vs Forward Current

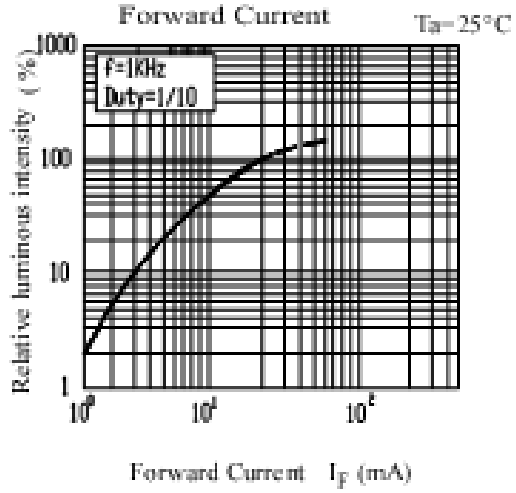

Forward Current Derating Curve

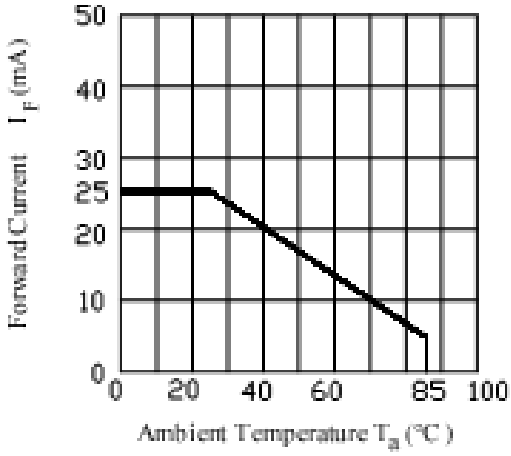


Radiation Diagram

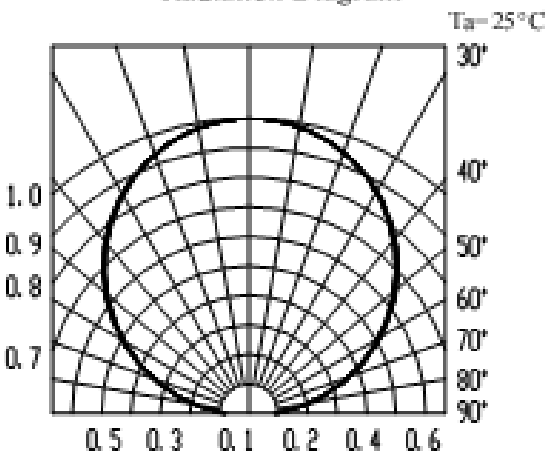


Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

R
LifecyclePhase:Developing()
Expired Period: Forever


Package Dimension

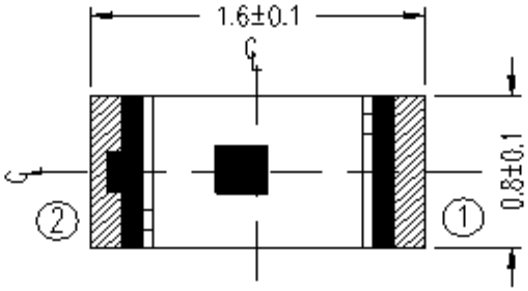

Top




Polarity

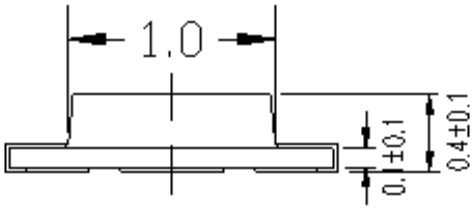


Side

Recommend Sodering Pad

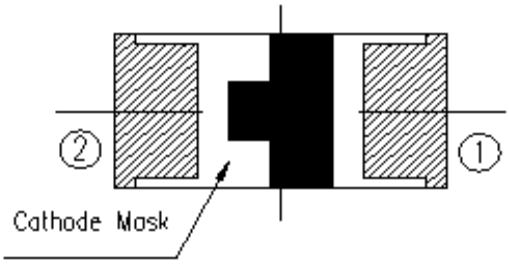

Bottom

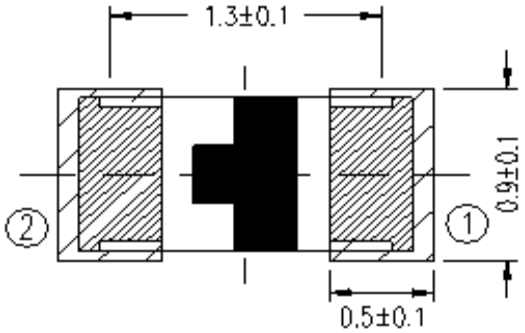


Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com


R
LifecyclePhase:Developing()
Expired Period: Forever

Label Explanation

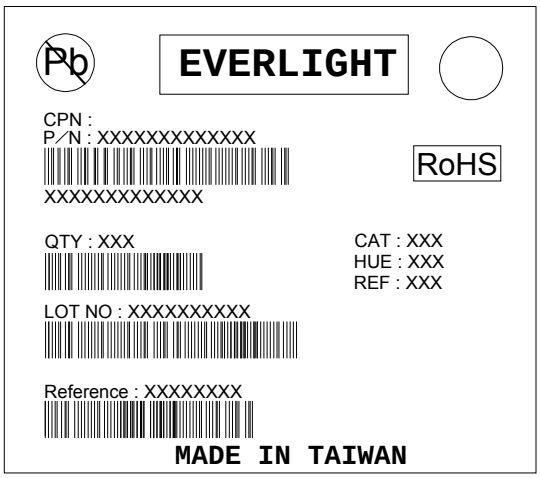

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

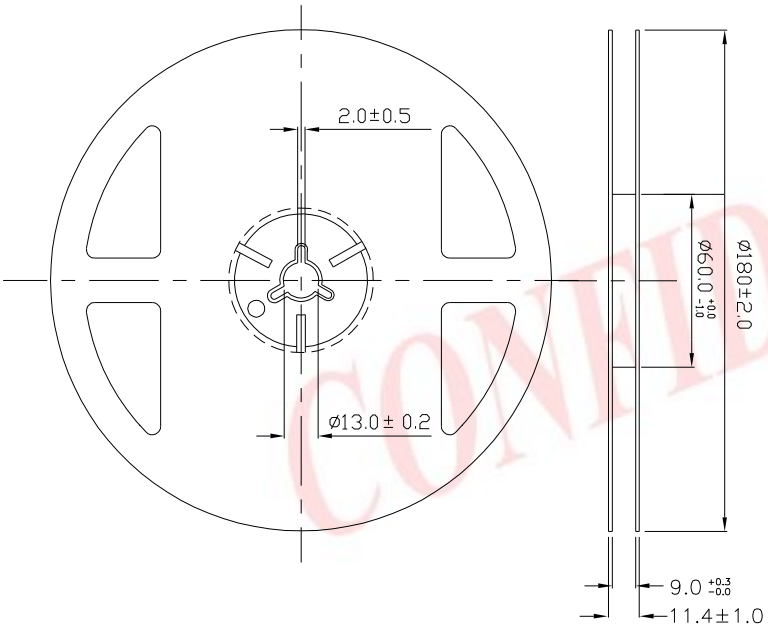


CONFIDENTIAL

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com


R
LifecyclePhase:Developing()
Expired Period: Forever

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

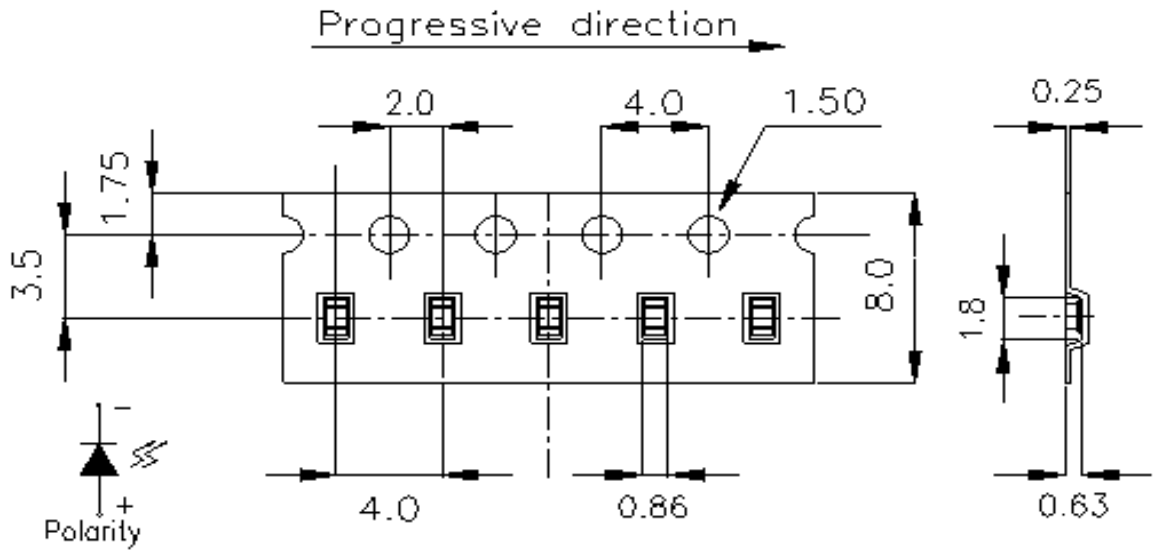

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Moisture Resistant Packaging

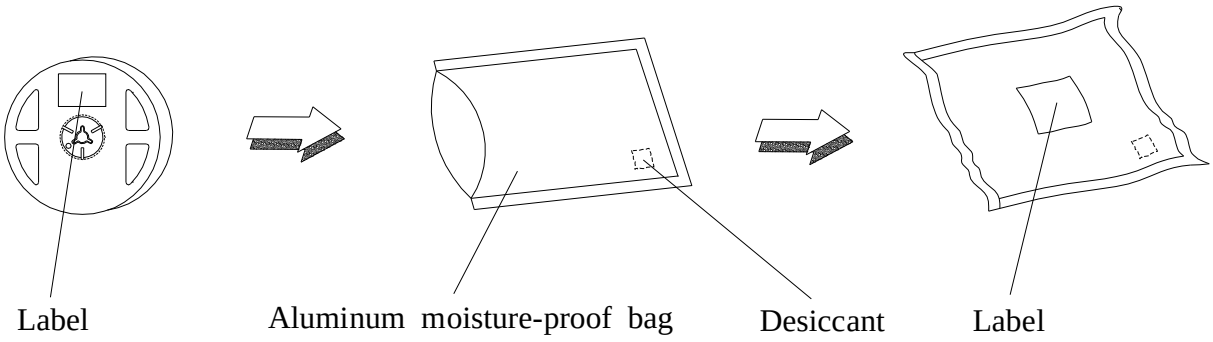


Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

LifecyclePhase:Developing() Expired Period: Forever


Precautions For Use

1. Over-current-proof
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
2. Storage
2.1 Do not open moisture proof bag before the products are ready to use.
2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
2.3 After opening the package :The LED´s floor life is 1 year under 30℃ or less and 60%RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
Baking treatment : 60±5℃ for 24 hours.
3. Soldering Condition
3.1 Pb-free solder temperature profile

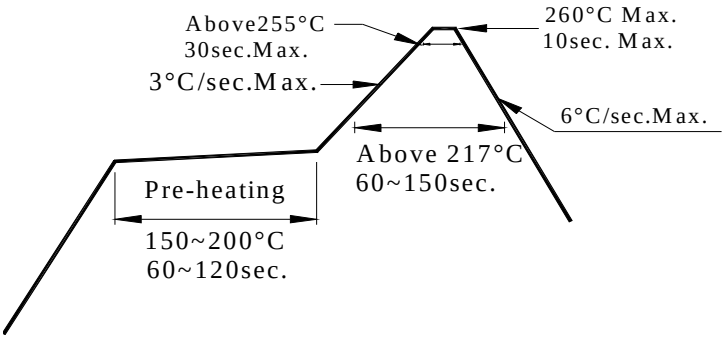

3.2 Reflow soldering should not be done more than two times.
3.3 When soldering, do not put stress on the LEDs during heating.
3.4 After soldering, do not warp the circuit board.
4.Soldering Iron
Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing
Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

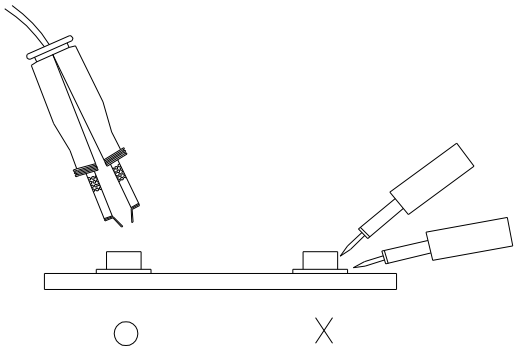

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com
R
LifecyclePhase:Developing() Expired Period: Forever

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact everlightamericas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

CONFIDENTIAL

Copyright © 2010, Everlight All Rights Reserved. Release Date : August.18.2015 Issue No: DSE-0013806 Rev.1 www.everlightamericas.com

R
LifecyclePhase:Developing() Expired Period: Forever