

euro-block


product specification

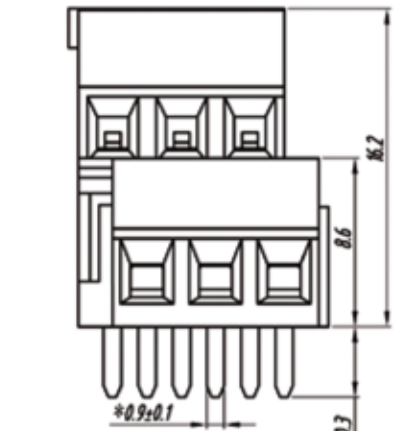

P. C. B. LAYOUT

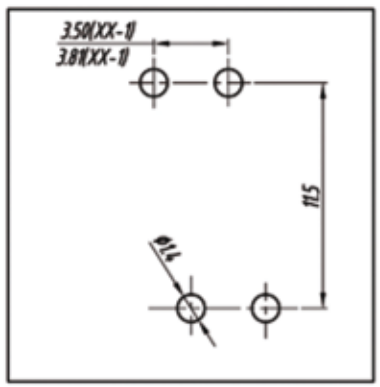

Section: A-A

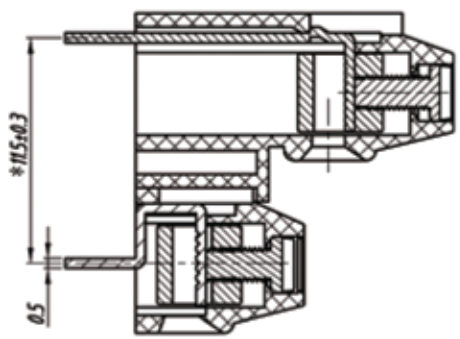

Electrical
Standard: UL-IEC
Rated voltage: 300V-250V
Rated current: 10A-10A
Wire range: 30-16AWG-1.5mm²
Withstanding voltage: AC2000V/1Min

Mechanical
Torque: 0.2Nm (1.7Lb'in)
Temp.Range: -40℃~+105℃
Strip length: 5-6mm

Dimensions
Pitch: 3.50mm (0.138"), 3.81mm (0.150")
Poles: 2p-xxp

Material
Housing: PA66, UL94V-0
Screws: M2, steel, Zinc plated
Pin header: Brass, Tin plated
Wire guard: Brass, Ni plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid					—	▱	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE		FIRST ANGLE PROJECTION
euro-block						NAME MRD31-L