

Incremental encoders

Hollow shaft max. $\varnothing 12$ mm

Resolution 5...6000 pulses

GI331, GI333



GI331 with hollow shaft

Features

- Encoder with hollow shaft $\varnothing 12$ mm
- Optical sensing
- Resolution max. 6000 ppr
- Mounting by thread pin or clamping ring
- Cost-efficient mounting

Optional

- Stainless steel design GE333

Technical data - electrical ratings

Voltage supply	5 VDC ± 10 % 4.75...30 VDC
Reverse polarity protection	Yes (4.75...30 VDC)
Consumption w/o load	≤ 30 mA (24 VDC) ≤ 60 mA (5 VDC)
Resolution (steps/turn)	5...6000
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤ 150 kHz
Output signals	A 90° B, N + inverted
Output circuit	Linedriver RS422 Push-pull short-circuit proof
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Approval	UL approval / E63076

Technical data - mechanical design

Housing	$\varnothing 58$ mm
Shaft	$\varnothing 12$ mm hollow shaft
Protection DIN EN 60529	IP 54 IP 65
Operating speed	≤ 6000 rpm
Starting torque	≤ 0.03 Nm IP 54 ≤ 0.09 Nm IP 65
Rotor moment of inertia	14.5 gcm^2
Materials	Housing: aluminium Flange: aluminium
Operating temperature	$-25 \dots +100$ °C (5 VDC) $-25 \dots +85$ °C (24 VDC)
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	250 g
E-connection	Connector or cable

Incremental encoders

Hollow shaft max. ø12 mm

Resolution 5...6000 pulses

GI331, GI333

Part number

Hollow shaft with thread pins

GI331.				
				See part number (pulses)
				E-connection
				C3 Connector M23, 12-pin, radial
				41 Cable 1 m, radial
				Voltage supply / signals
				22 5 VDC / linedriver RS422
				70 4.75...30 VDC / push-pull
				72 4.75...30 VDC / linedriver RS422 (5 VDC)
				Hollow shaft / torque pin
0				Hollow shaft ø12 mm with 2 thread pins with pin 15 mm, IP 54
1				Hollow shaft ø12 mm with 2 thread pins with pin 9.5 mm, IP 54
A				Hollow shaft ø12 mm with 2 thread pins without pin, IP 54

Part number (pulses)

49 (5)	57 (128)	22 (1000)	31 (3600)
36 (10)	06 (200)	23 (1024)	34 (4096)
50 (25)	09 (250)	24 (1250)	35 (5000)
39 (50)	13 (360)	26 (1500)	48 (6000)
40 (60)	14 (400)	28 (2000)	
41 (100)	15 (500)	30 (2500)	

Other pulse numbers upon request.

Example: ordering key 23 = 1024 pulses

Hollow shaft with clamping ring

GI333.				
				See part number (pulses)
				E-connection
				C3 Connector M23, 12-pin, radial
				41 Cable 1 m, radial
				Voltage supply / signals
				22 5 VDC / linedriver RS422
				70 4.75...30 VDC / push-pull
				72 4.75...30 VDC / linedriver RS422 (5 VDC)
				Hollow shaft / torque pin
0				Hollow shaft ø12 mm clamping ring on housing with pin 15 mm, IP 54
1				Hollow shaft ø12 mm clamping ring on housing with pin 9.5 mm, IP 54
A				Hollow shaft ø12 mm clamping ring on housing without pin, IP 54
G				Hollow shaft ø12 mm clamping ring on housing with pin 15 mm, IP 65

Accessories

Connectors and cables (page %S)

Z 141.001	Female connector M23, 12-pin, less cable
Z 141.003	Female connector M23, 12-pin, 2 m cable
Z 141.005	Female connector M23, 12-pin, 5 m cable
Z 141.007	Female connector M23, 12-pin, 10 m cable

Mounting accessories (page %S)

Z 119.023	Spring coupling for encoders with ø58 mm housing
Z 119.024	Torque support and spring washer for encoders with 9.5 mm pin
Z 119.041	Torque support by rubber buffer element for encoders with 15 mm pin

Incremental encoders


Hollow shaft max. ø12 mm

Resolution 5...6000 pulses

GI331, GI333


Output signals

Clockwise rotating direction when looking at flange.

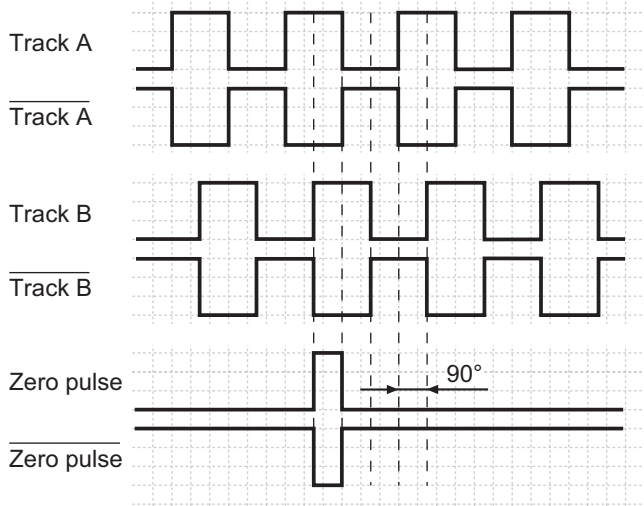

Terminal assignment

Connector	Core colour	Assignment
Pin 1	pink	Track B inv.
Pin 2	blue	UB-Sense
Pin 3	red	Track N (zero pulse)
Pin 4	black	Track N inv. (zero pulse inv.)
Pin 5	brown	Track A
Pin 6	green	Track A inv.
Pin 7	–	–
Pin 8	grey	Track B
Pin 9	–	–
Pin 10	white/green	GND
Pin 11	white	GND-Sense
Pin 12	brown/green	UB



UB-Sense and GND-Sense are directly connected to UB resp. GND. Please use cores twisted in pairs (for example track A / track A inv.) for extension cables of more than 10 m length.

Trigger level

Outputs	Linedriver RS422
Output level High	>2.5 V (I = -20 mA)
Output level Low	<0.5 V (I = 20 mA)
Load High	<20 mA
Load Low	<20 mA

Outputs	Push-pull short-circuit proof
Output level High	>UB -3 V (I = -20 mA)
Output level Low	<0.5 V (I = 20 mA)
Load High	<20 mA
Load Low	<20 mA

Incremental encoders


Hollow shaft max. ø12 mm

Resolution 5...6000 pulses


GI331, GI333

Dimensions

GI331 hollow shaft and pin

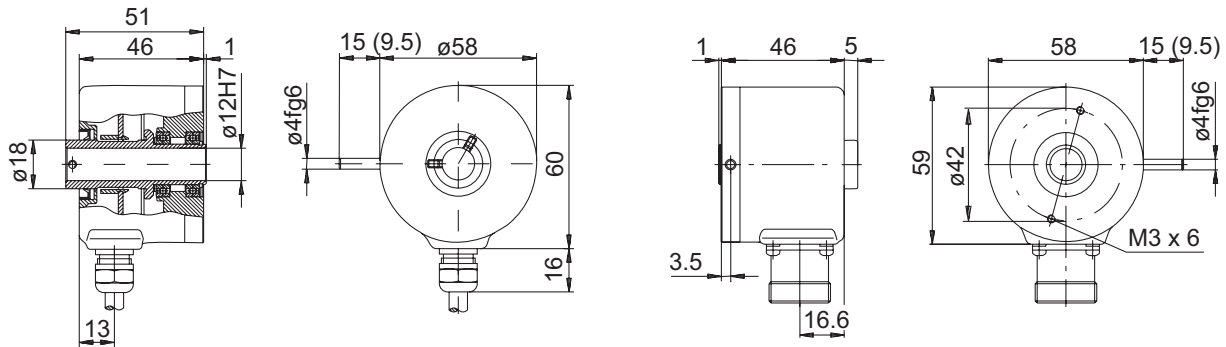

GI333 hollow shaft and clamping ring on housing

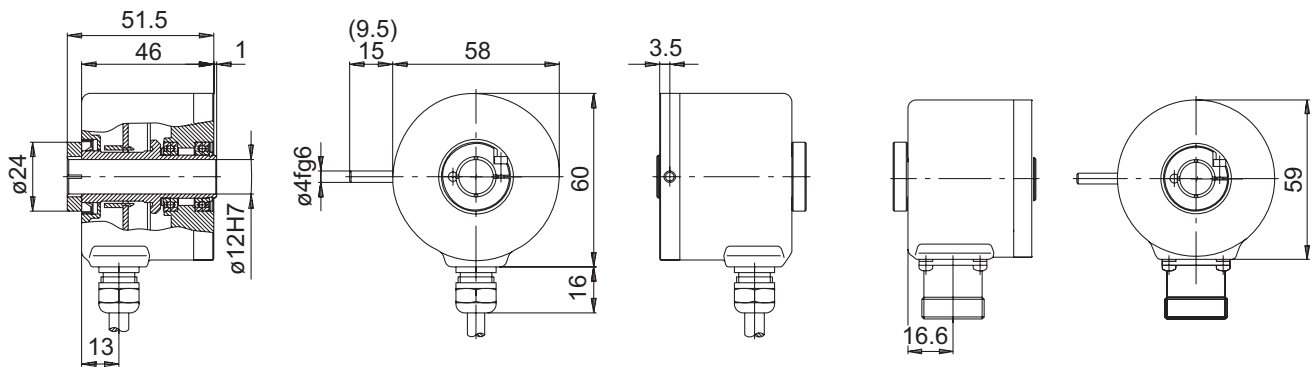

GI331, GI333 connector dimensions

