



Specifications:
 Voltage rating: 600V AC/ DC
 Current rating: 1A AC/DC
 Withstanding voltage: 1700V AC/minute
 Temperature range: -55° ~ +105°
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤20mΩ
 After environmental testing: ≤40mΩ

X4001 W V-02-LP SN
 ① ② ③ ④ ⑤ ⑥

- ① Series No
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180°
- ④ Row No.-Pin No.: 02P
- ⑤ Material: LP-LCP 94V-0
- ⑥ Plating Category: SN-Bright Tin Plating

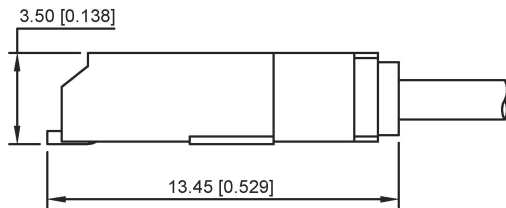

Assembly Layout

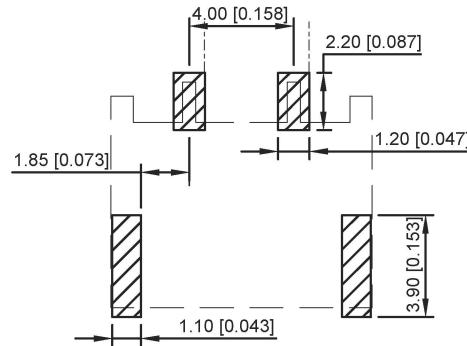

Board Layout

X4001WF-02-LPSN	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)

广东星坤科技股份有限公司

生 日期
 發 日期

ΔX
 MARK 文件工程章

REVISIONS

www.xk-lq.cn www.helloxkb.com www.helloxkb.cn

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X4001WV-02-LPSN
DWN	DATE	VIEW:	PART NO.: 4.00mm BTB Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
KKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0