

Wall Industries, Inc.

PSPSD-60 SERIES

88~264VAC Input Voltage Range
Single Outputs
60 Watts Output Power
AC/DC Switching Power Supplies



FEATURES

- Single Output
- RoHS Compliant
- Universal AC Input Range (Full Range)
- High Efficiency and High Reliability
- Over Voltage, Over Load, and Short Circuit Protected
- Wide Operating Ambient Temperature (-20°C to +70°C)
- All Using 105°C Long Life Electrolytic Capacitors
- 60W Output Power
- 100% Full Load Burn-in Tested
- Output Voltages Available from 5VDC to 48VDC
- Dimensions: 5.08" x 3.86" x 1.50"
- Output Voltage Adjustability

DESCRIPTION

The PSPSD-60 series of AC/DC switching power supplies offers 60 Watts of output power in a 5.08" x 3.86" x 1.50" enclosed case. All models have a single output and a universal AC input voltage range of 88~264VAC. Some features include wide operating temperature range (-20°C to +70°C), output adjustability, and over load, over voltage, and short circuit protection. These supplies are RoHS compliant and have UL/cUL and CE safety approvals. All models are 100% full load burn-in tested.


SPECIFICATIONS: PSPSD-60 Series		
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.		
INPUT SPECIFICATIONS		
Input Voltage Range	88~264VAC	
Input Frequency	47~63Hz	
AC Current	5V & 12V output models: 1.6A max. 15V & 24V output models: 1.5A max. 48V output model: 1.45A max.	
Inrush Current	Cold Start 20A typ. at 115VAC; 40A typ. at 230VAC	
OUTPUT SPECIFICATIONS		
Output Voltage	See Table	
Voltage Accuracy	±2.0%	
Voltage Adjustment Range	See Table	
Line Regulation	±0.5%	
Load Regulation	±2.0%	
Output Current	See Table	
Ripple & Noise (<i>See Note 1</i>)	See Table	
Setup Time	< 2.0s at 115VAC and full load; < 1.0s at 230VAC and full load	
Hold Up Time	> 10ms at 115VAC and full load; > 20ms at 230VAC and full load	
Temperature Coefficient	±0.03%/°C	
Overshoot and Undershoot	< 5.0%	
PROTECTION		
Over Load Protection	105% ~ 150% of rated output power, hiccup mode, auto-recovery	
Over Voltage Protection	120% ~ 150% of rated output voltage, shutdown (5V) 110% ~ 133% of rated output voltage, shutdown (12V) 110% ~ 140% of rated output voltage, shutdown (15V & 24V) 110% ~ 125% of rated output voltage, shutdown (48V)	
Short Circuit Protection	Long-term mode, auto-recovery	
GENERAL SPECIFICATIONS		
Efficiency (typical)	See Table	
Withstand Voltage	Primary to Secondary	3000VAC; ≤ 10mA
	Primary to PG	1500VAC; ≤ 10mA
	Secondary to PG	500VDC; ≤ 10mA
Isolation Resistance	≥ 100MΩ	
Leakage Current	< 0.25mA at 115VAC; < 3.5mA at 230VAC	
ENVIRONMENTAL SPECIFICATIONS		
Operating Ambient Temperature	-20°C to +70°C	
Storage Temperature	-40°C to +85°C	
Working Humidity	20 ~ 90% RH (non-condensing)	
Storage Humidity	10 ~ 95% RH (non-condensing)	
Cooling Method	Free air convection	
MTBF (MIL-HDBK-217F)	> 100,000 hours @ 25°C and full load	
PHYSICAL SPECIFICATIONS		
Dimensions (L x W x H)	5.08 x 3.86 x 1.50 inches (129 x 98 x 38 mm)	
Packing	30PCS/CTN, 14.2Kgs, 0.044CBM	
SAFETY & EMC (<i>See Note 2</i>)		
Safety Standards	UL60950-1, EN60950-1: 2006	
EMI Conduction and Radiation	Compliance to EN55022 (CISPR22) Class B	
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, light industry level, criteria A	

MODEL SELECTION TABLE								
Model Number	Input Voltage	Output Voltage	Output Current	Voltage Adj. Range	Ripple & Noise ⁽¹⁾		Output Power	Efficiency
					-10°C	0°C~+55°C		
PSPSD-60-5	88 ~ 264 VAC	5 VDC	12A	4.2 – 5.8 VDC	100mVp-p	50mVp-p	60W	75%
PSPSD-60-12		12 VDC	5A	10.8 – 13.2 VDC	120mVp-p	120mVp-p	60W	80%
PSPSD-60-15		15 VDC	4.0A	13.5 – 16.5 VDC	120mVp-p	120mVp-p	60W	80%
PSPSD-60-24		24 VDC	2.5A	21.5 – 25.8 VDC	120mVp-p	120mVp-p	60W	80%
PSPSD-60-48		48 VDC	1.25A	45 – 52 VDC	240mVp-p	240mVp-p	60W	83%


NOTES

1. Ripple & noise is measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with 0.1µF and 47µF capacitors in parallel.
2. The SPS is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

BLOCK DIAGRAM

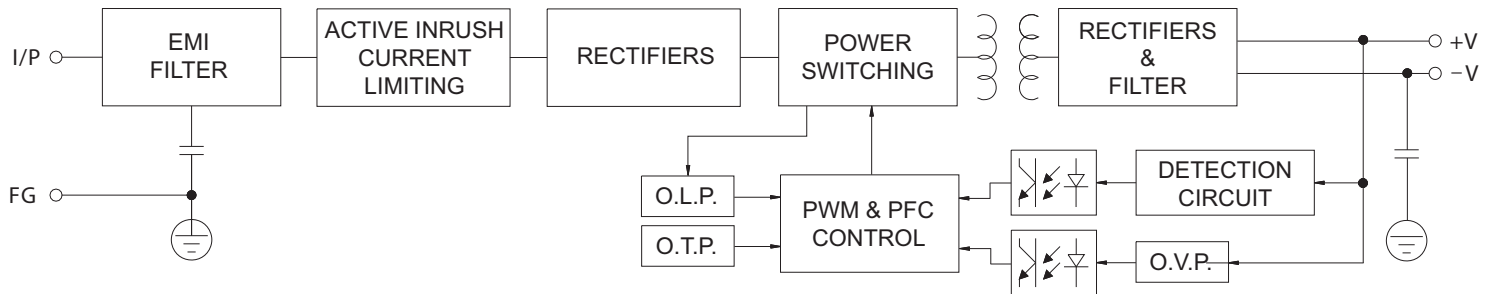


DERATING CURVES

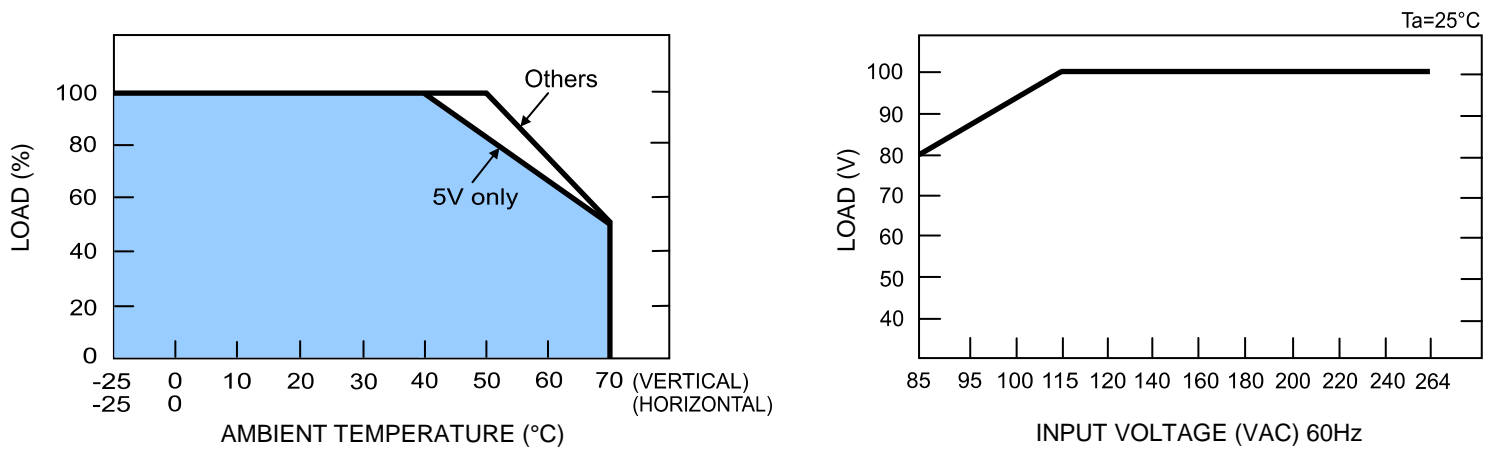

MECHANICAL DRAWING

Unit: inches (mm)

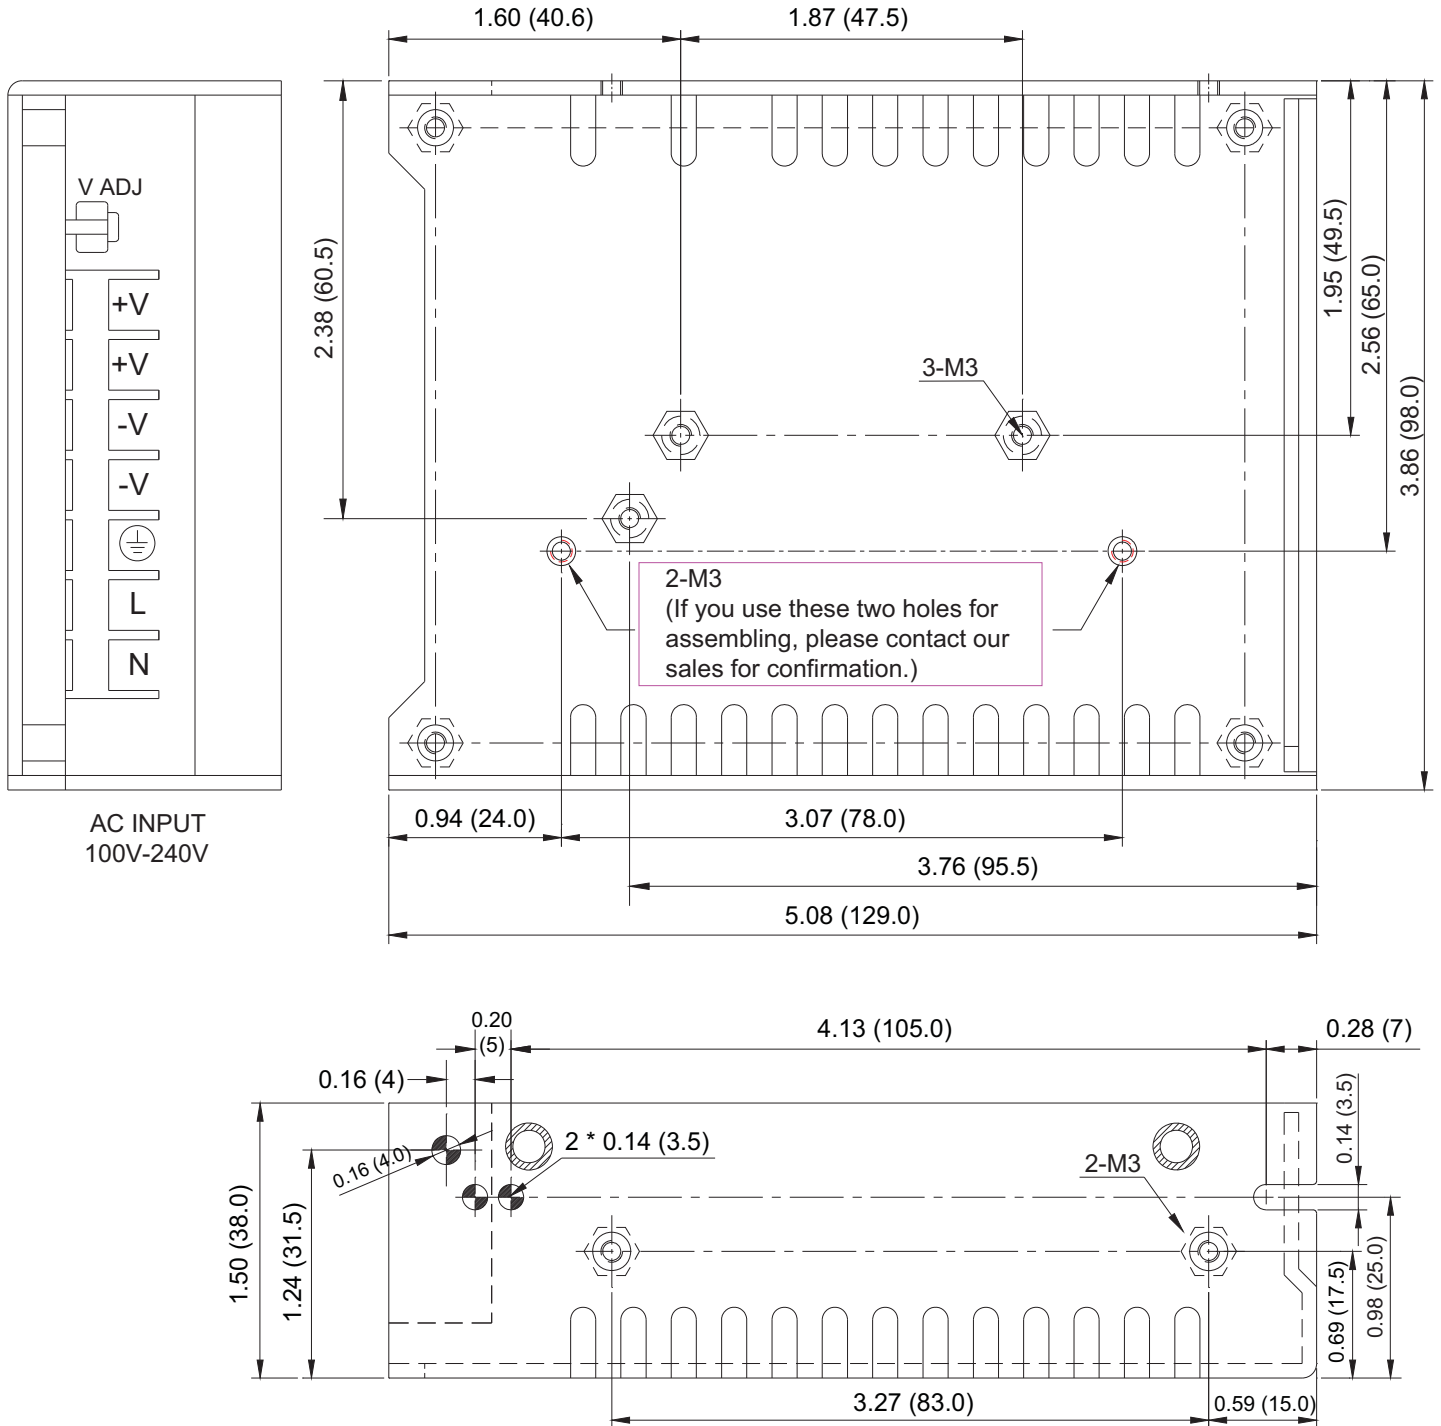

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

<u>Phone:</u>	☎ (603)778-2300
<u>Toll Free:</u>	☎ (888)597-9255
<u>Fax:</u>	☎ (603)778-9797
<u>E-mail:</u>	sales@wallindustries.com
<u>Web:</u>	www.wallindustries.com
<u>Address:</u>	5 Watson Brook Rd. Exeter, NH 03833