

INTRODUCTION

Adam Tech MR Series Miniature Ribbon connectors come in a variety of terminations including Solder Terminals, Straight PCB Tails, Right Angle PCB mount, Flat Cable IDC and Straddle Mount Card Edge. These connectors with their high pressure, flat wiping contacts are a very popular widely used interface especially in telecommunication applications. Offered in 14, 24, 36 and 50 positions they are a good choice for high reliability positive latching connector applications. They combine an extremely reliable contact design with the popular, polarized D face. Adam Tech connectors are manufactured with precision stamped contacts and offer a wide selection of mating and mounting options.

FEATURES:

Available in many termination styles
High pressure blade contacts
Industry standard compatibility
Durable metal shell design
Variety of Mating and mounting options
Spring latches provided separately installation optional.

MATING CONNECTORS:

Adam Tech Miniature Ribbon connectors and all industry standard miniature ribbon connectors.

SPECIFICATIONS:

Material:

Standard insulator: PBT, Glass filled, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Blue (Black optional)
Contacts: Phosphor Bronze
Shell: Steel, nickel plated

Contact Plating:

Gold Flash over nickel underplate on mating area, Tin over Copper underplate on tails

Electrical:

Operating Voltage: 250V AC
Current Rating: 1 Amp max.
Contact Resistance: 35 mΩ max.
Insulation Resistance: 1000 MΩ min.
Dielectric Withstanding Voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 12 oz max.
Withdrawal force: 4.8 oz min.

Temperature Rating:

Operating Temperature: -55°C to +105°C
Soldering process temperature:
Standard insulator: 235°C
Hi-Temp insulator: 260°C

PACKAGING:

Anti-ESD plastic trays


APPROVALS AND CERTIFICATIONS:

UL Recognized File No. E224053
CSA Certified File No. LR1578596




MINIATURE RIBBON

STRAIGHT PCB TAIL
IDC FLAT CABLE
SOLDER TERMINALS
RIGHT ANGLE PCB MOUNT
MR SERIES

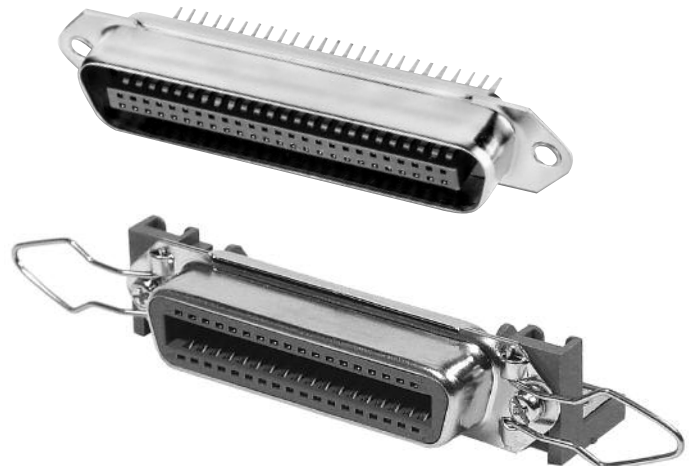

ORDERING INFORMATION

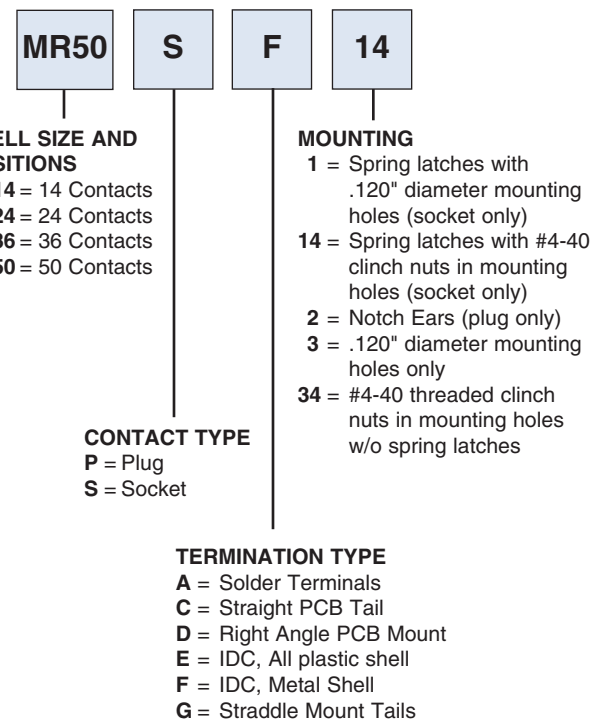

OPTIONS:

Add designator(s) to end of part number
30 = 30 μin gold plating in contact area
BK = Black color insulator
F = Forked boardlocks
HT = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C
LI = Spring Latches Installed