

Monolithic crystal filter

MQF70.455-4000/07



Application

- 4 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

		Unit	Value
Nominal frequency	f_0	MHz	70.455
Insertion loss		dB	< 6.0
Pass band at 3.0dB		kHz	$\pm > 20$
Ripple in pass band	$f_0 \pm 10$ kHz	dB	< 1.0
Stop band attenuation	$f_0 \pm 75$ kHz	dB	> 40
Alternate attenuation	$f_0 \pm 455$ kHz	dB	> 60
	$f_0 \pm 825...925$ kHz	dB	> 60
Spurious response		dB	> 15
Group delay distortion	$f_0 \pm 4$ kHz	μ s	< 15
Nominal drive level		dBm	< 0
Maximal drive level		dBm	15

Terminating impedance Z

R1 C1	Ohm/pF	50 0
R2 C2	Ohm/pF	50 0

Operating temp. range


°C -20... +70

Operable temp. range




°C -40... +85

Characteristics MQF70.455-4000/07

Pass band

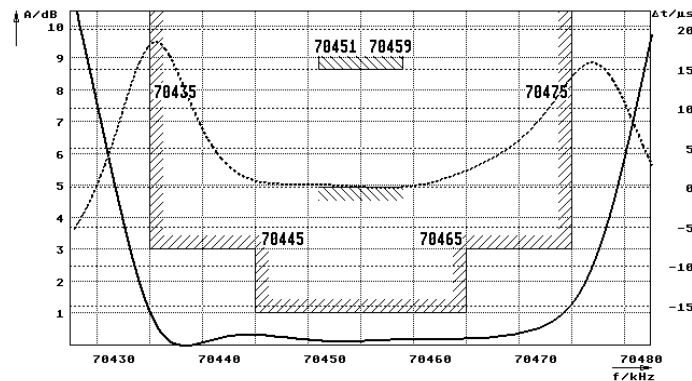

Stop band

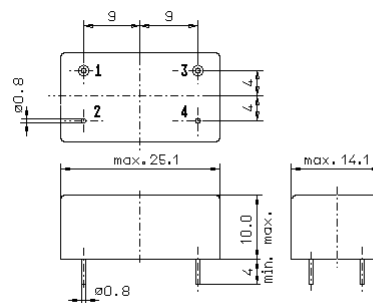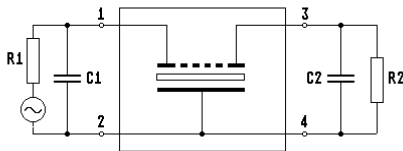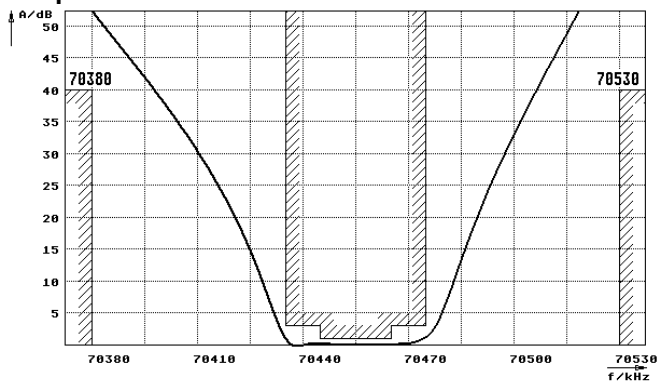

Pin connections:

- 1 Input
- 2 Ground-Input
- 3 Output
- 4 Ground-Output